


Photoelectric Sensors
BOS 23K-PU-RR10-S4
Order Code: BOS016P

BALLUFF



1) Output function/Error, 2) Power/setting mode, 3) Sn, light/dark, 4) Optical axis receiver, 5) Optical axis emitter, 6) rotatable 270°

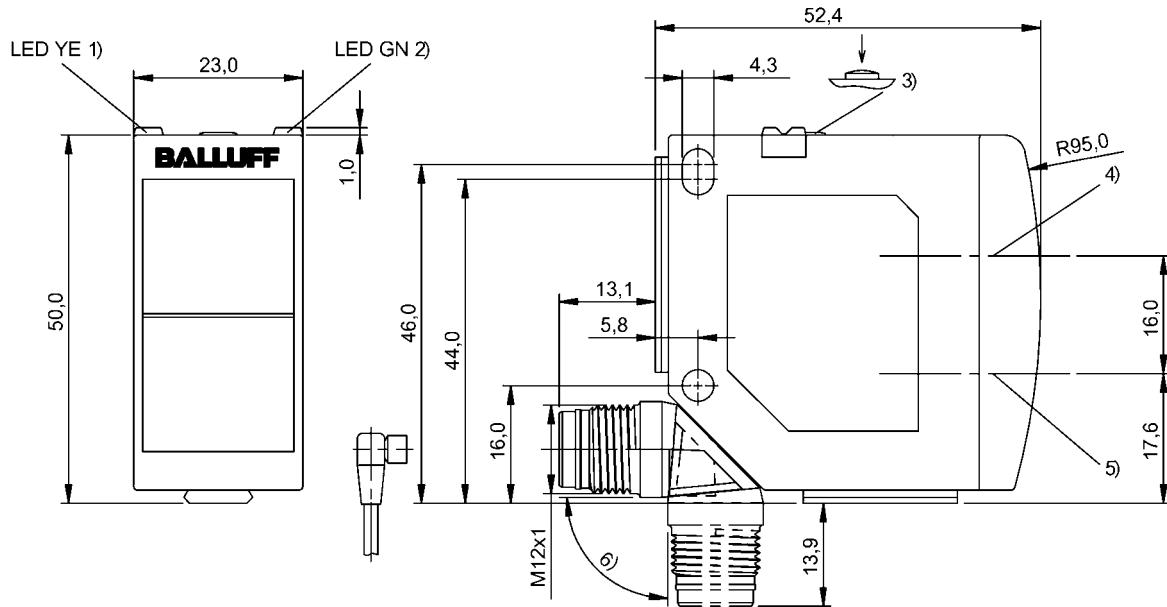

Basic features

Approval/Conformity	Ecolab CE cULus WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Series	23K
Style	Square Connection can be rotated

Display/Operation

Adjuster	button
Display	Output function- LED yellow LED green: Power Teach - LED yellow+green, alt. Setting NO/NC - LED green, flashing Error - LED yellow, flashing
Setting	Light-on/dark-on Rated switching distance (Sn)

Electrical connection

Connection	Connector, M12x1-Male, 4-pin
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Input function	Key disable on/off Same function as button
No-load current I_0 max. at U_e	30 mA
Operating voltage U_b	10...30 VDC
Protection class	II
Rated insulation voltage U_i	75 V DC
Rated operating current I_e	100 mA
Rated operating voltage U_e DC	24 V
Ready delay t_V max.	300 ms
Residual current I_r max.	50 μ A
Ripple max. (% of U_e)	10 %
Switching frequency	600 Hz
Turn-off delay t_{off} max.	0.83 ms
Turn-on delay t_{on} max.	0.83 ms
Utilization category	DC-13
Voltage drop U_d max. at I_e	2 V

Environmental conditions

Ambient temperature	-20...60 °C
EN 60068-2-27, Shock	Half-sinus, 30 g_n , 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 0.5 mm, 3x30 min
IP rating	IP6x
IP rating per DIN 40050	IPx9K

Functional safety

MTTF (40 °C)	480 a
--------------	-------

Interface

Switching output	PNP normally open/normally closed (NO/NC)
------------------	---

Material

Housing material	PC ABS
Material sensing surface	PMMA

Mechanical data

Dimension	23 x 51 x 52.4 mm
Mounting part	Screw M4
Tightening torque max.	1.5 Nm

Optical features

Ambient light max.	5000 Lux
Beam characteristic	Divergent
Blind zone	300 mm
LED group per IEC 62471	Exempt Group
Light spot size	300 x 300 mm at 12 m
Light type	LED, red light
Polarizing filter	yes
Principle of optical operation	Retroreflective sensor
Switching function, optical	dark-on/light-on
Wave length	640 nm

Range/Distance

Range	0...14 m
Rated operating distance S_n	14 m Adjustable

Remarks

Do not press key using a pointed tool.
Order accessories separately.
For additional information, refer to user's guide.
Teach-in also possible when object is in motion.
The sensor is functional again after the overload has been eliminated.
Actuation object (target): gray card, 200 x 200, 90 % remission, lateral approach, approach direction vertical to lens axis plane.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


Connector Drawings



Photoelectric Sensors
BOS 23K-PU-RR10-S4
Order Code: BOS016P

BALLUFF

Wiring Diagrams



Opto Symbols

