

## IB300420

### Inductive sensors • Norm switching distance

sensor inductive, M30x1.5 80long, Flush, Sn: 10, 10-30V DC, PNP Anticoincidence, Connector M12 4pin, IP67, Brass Nickel-plated

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Type of switching function	Exclusive-OR
Type of electrical connection	Connector M12
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	15%
No-load current	13mA
Number of pins	4
Relative repeat accuracy	10%
Residual ripple	10%
Switching distance	10mm
Switching frequency	500Hz
Voltage drop	2.4V
Operating voltage (DC)	10 - 30V

#### Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1.5mm
Cable infeed	axial
Length	80mm
Mechanical mounting condition for sensor	flush
Surface	nickel-plated
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PA6.6)
Housing material	Brass
Thread dimension	M30
Ambient temperature	-25 - 70°C

## Other features

Reference medium / object	Standard measuring plate FE360 30x30x1mm
Ambient temperature	-25 - 70°C


## Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

## More

IPF Product Group	203 inductive sensors (diverse)
packaging dimensions	105 x 43 x 43 mm
gross weight	184 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

## Connection

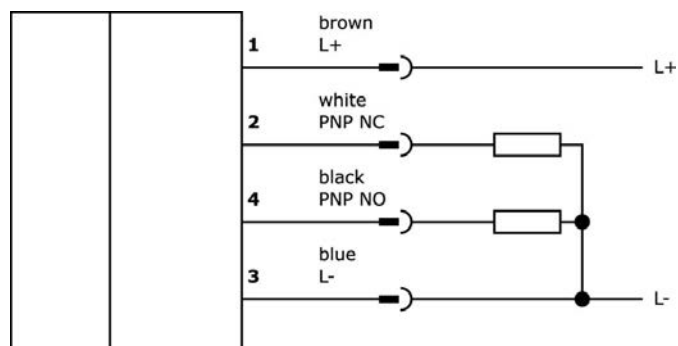

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).