


IBQ40100

Inductive sensors • Norm switching distance

sensor inductive, 22x4x4mm, Flush, Sn: 0.8, 10-30V DC, PNP NO, Cable 2m PVC, IP67, Stainless steel 1.4305

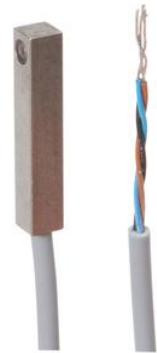

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	100mA
Relative hysteresis	20%
Short-circuit protection	Yes
No-load current	12mA
Switching distance	0,8mm
Switching frequency	3000Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

Mechanical features

Design	Cuboid
Width	4mm
Height	22mm
Cable length	2m
Cable infeed	axial
Length	4mm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (EP)
Housing material	Stainless steel 1.4305
Material of cable sheath	Plastic (PVC)
Ambient temperature	-25 - 75°C

Other features

Ambient temperature	-25 - 75°C
---------------------	------------


Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	215 inductive sensors (cuboid)
packaging dimensions	120 x 100 x 15 mm
gross weight	19 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

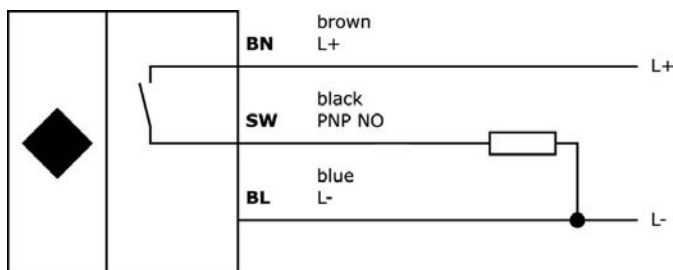

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.