

## IBR40060

### Inductive sensors • Distance measurement

sensor inductive, analog, Ø4mm 30long, Quasi-flat, Sn: 0-1, 15-30V DC, 0-10V, M5-connector, IP67, Stainless steel



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Type of analog output	0 - 10V
Type of electrical connection	Connector M5
Short-circuit protection	No
Reverse polarity protection	No
Operating voltage (DC)	15 - 30V
Measuring range	0 - 1mm

#### Mechanical features

Design	Cylinder plain
Diameter	4mm
Cable infeed	axial
Length	30mm
Mechanical mounting condition for sensor	semi-flush
Degree of protection (IP)	IP67
Housing material	Stainless steel
Ambient temperature	0 - 60°C

#### Other features

Ambient temperature	0 - 60°C
---------------------	----------


#### Classification

ETIM 8	EC001818 Inductive distance sensor
--------	------------------------------------

## More

IPF Product Group	209 inductive sensors (analog)
packaging dimensions	120 x 100 x 50 mm
gross weight	10 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

## Connection

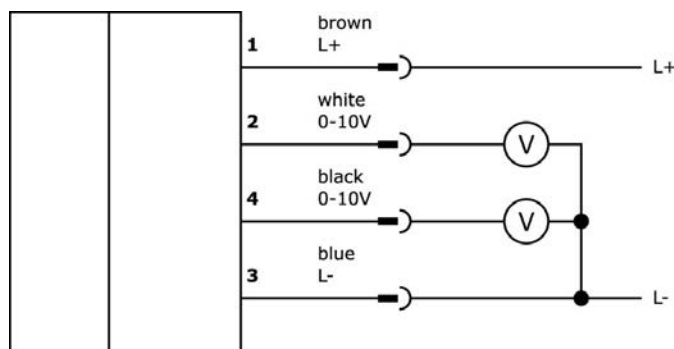

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).