

## IC991267

### Inductive sensors • Full-metal housing

sensor inductive, all-steel, M12x1 56long, Flush, Sn: 1.8, 7-35V DC, PNP NO, Cable 2m PUR (Polyurethane), IP67, Stainless steel 1.4305

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable
Type of switching output	PNP
Rated switching current	300mA
Switching distance	1,8mm
Operating voltage (DC)	7 - 35V

#### Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread pitch	1mm
Cable length	2m
Cable infeed	axial
Length	56mm
Mechanical mounting condition for sensor	flush
Degree of protection (IP)	IP67
Active area material of sensor	Stainless steel 1.4305
Housing material	Stainless steel 1.4305
Material of cable sheath	Plastic (PUR)
Thread dimension	M12
Ambient temperature	-25 - 70°C

#### Other features

Harsh environmental conditions	Yes
Feeding technology	Yes
Oil and cooling lubricants	Yes
Ambient temperature	-25 - 70°C


## Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

## More

IPF Product Group	204 inductive sensors (all-steel)
packaging dimensions	123 x 77 x 25 mm
gross weight	80 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

## Connection

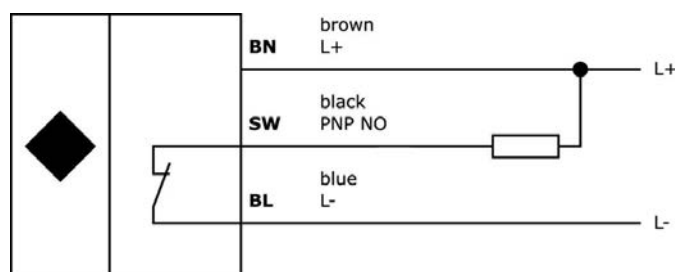

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).