

## IN26E077

### Inductive sensors • Norm switching distance

sensor inductive, 40x26x12mm, Non-flush, Sn: 4, 10-30V DC, PNP NO, Cable connector M12 0.5m PUR (Polyurethane), IP67, PBT



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Display	LED display
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable connector M12
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	15%
Short-circuit protection	Yes
No-load current	13mA
Switching distance	4mm
Switching frequency	1000Hz
Voltage drop	2.4V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 30V

**Mechanical features**

Number of cores	3
Design	Cuboid
Width	12mm
Height	40mm
Cable length	0.5m
Cable infeed	axial
Length	26mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PBT)
Housing material	PBT
Material of cable sheath	Plastic (PUR)
Ambient temperature	-25 - 70°C

**Other features**

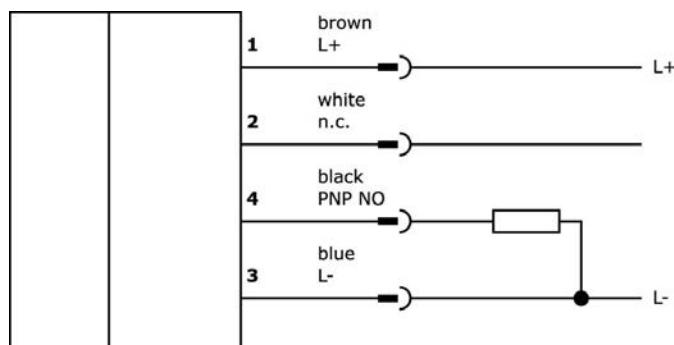
Ambient temperature	-25 - 70°C
---------------------	------------

**Classification**

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

**More**

IPF Product Group	215 inductive sensors (cuboid)
packaging dimensions	123 x 77 x 25 mm
gross weight	520 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

**Connection**

**Installation**

Mounting / installation may only be carried out by a qualified electrician!

**Disposal****Safety warnings**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).