

## IN800140

### Inductive sensors • Increased ambient temperature

sensor inductive, M80x1.5 81long, Non-flush, Sn: 50, 10-35V DC, 0-160°C, PNP NO, Lemo-connector, IP50, Stainless steel 1.4305

including 2x Nut



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

#### Electrical features

Type of switching function	Normally open contact (NO)
Type of electrical connection	Lemo plug connector
Type of switching output	PNP
Rated switching current	150mA
Relative hysteresis	15%
Short-circuit protection	Yes
No-load current	15mA
Switching distance	50mm
Switching frequency	100Hz
Voltage drop	2V
Reverse polarity protection	Yes
Operating voltage (DC)	10 - 35V

#### Mechanical features

Alignment of cable entry	axial
Design	Cylinder, screw-thread
Thread length	40mm
Thread pitch	1.5mm
Cable infeed	axial
Length	81mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP50
Active area material of sensor	Plastic (PTFE)
Housing material	Stainless steel 1.4305
Thread dimension	M80
Ambient temperature	0 - 160°C

## Other features

Reference medium / object	Standard measuring plate FE360 80x80x1mm
Ambient temperature	0 - 160°C


## Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

## More

IPF Product Group	202 inductive sensors (high temperature)
packaging dimensions	200 x 118 x 77 mm
gross weight	832 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

## Connection

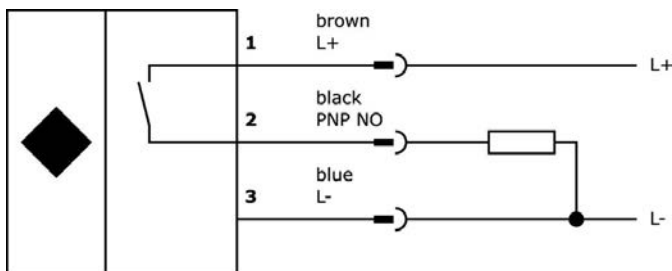

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website [www.ipf-electronic.com](http://www.ipf-electronic.com).

Dimensional drawing

