

IY190120**Inductive sensors • Sensors for hose mounting**

sensor inductive, 78x9x19mm, Non-flush, Sn: 16, 10-30V DC, PNP NO, Cable connector M12 0.05m, IP67, PA 6.6 (synthetic), Dynamic, hose mounting



Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

Electrical features

Display	Switching state display by LED red Operating mode display: LED green
Type of switching function	Normally open contact (NO)
Type of electrical connection	Cable connector M12
Type of switching output	PNP
Rated switching current	200mA
Relative hysteresis	15%
Pulse stretching	100ms
Short-circuit protection	Yes
No-load current	10mA
Relative repeat accuracy	10%
Switching distance	16mm
Switching behavior of the output	Dynamic
Voltage drop	2.4V
Reverse polarity protection	Yes
Decay time	100ms
Operating voltage (DC)	10 - 30V

Mechanical features

Design	Cuboid
Width	19mm
Height	78.5mm
Cable length	0.05m
Cable infeed	axial
Length	9mm
Mechanical mounting condition for sensor	non-flush
Degree of protection (IP)	IP67
Active area material of sensor	Plastic (PA6.6)
Housing material	PA 6.6 (synthetic)
Ambient temperature	-25 - 75°C

Other features

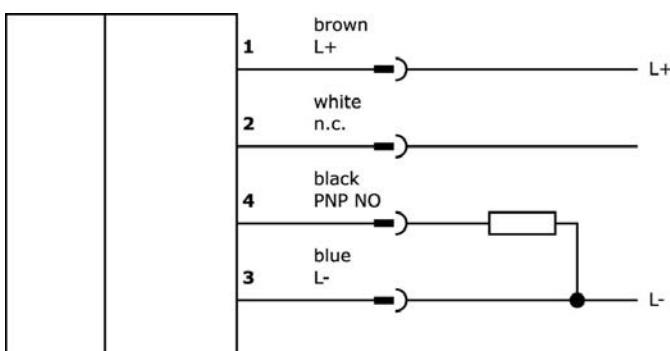
Feeding technology	Yes
Ambient temperature	-25 - 75°C

Classification

ETIM 8	EC002714 Inductive proximity switch
--------	-------------------------------------

More

IPF Product Group	211 inductive sensors (ring/hose)
packaging dimensions	123 x 77 x 25 mm
gross weight	40 g
Customs tariff number	85365019
WEEE number	40951076
OzDS-compliant	Yes
POP-compliant	Yes
Reach-compliant	Yes
RoHS-compliant	Yes

Connection**Installation**

Mounting / installation may only be carried out by a qualified electrician!

Disposal

Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing