



Operating Manual
mic+ Ultrasonic Sensors
with one switching output

- mic+25/D/TC

mic+35/D/TC

mic+130/D/TC

mic+340/D/TC

mic+600/D/TC
- mic+25/E/TC

mic+35/E/TC

mic+130/E/TC

mic+340/E/TC

mic+600/E/TC

- Product description**
- The mic+ sensor with one switching output measures the distance to an object within the detection zone contactless. Depending on the adjusted detect distance the switching output is set.
 - All settings are done with two push-buttons and a three-digit LED-display (TouchControl).
 - Three-colour LEDs indicate the switching status.
 - The output functions are changeable from NOC to NCC.
 - The sensors are adjustable manually via TouchControl or via Teach-in procedure.
 - Useful additional functions are set in the Add-on-menu.
 - Using the LinkControl adapter (optional accessory) all TouchControl and additional sensor parameter

settings can be adjusted by a Windows® Software.

The mic+ sensors have a **blind zone** in which distance measurement is not possible. The **operating range** indicates the distance of the sensor that can be applied with normal reflectors with sufficient function reserve. When using good reflectors, such as a calm water surface, the sensor can also be used up to its **maximum range**. Objects that strongly absorb (e.g. plastic foam) or diffusely reflect sound (e.g. pebble stones) can also reduce the defined operating range.

- Safety Notes**
- Read the operating instructions prior to start-up.
 - Connection, installation and adjustment works may only be carried out by expert personnel.

- No safety component in accordance with the EU Machine Directive, use in the area of personal and machine protection not permitted

Proper Use

mic+ ultrasonic sensors are used for non-contact detection of objects.

Synchronisation

If the assembly distance of multiple sensors falls below the values shown in Fig. 1 the integrated synchronisation should be used. Connect Sync/Com-channels (pin 5 at the units receptable) of all sensors (10 maximum).

mic+25...	≥0.35 m	≥2.50 m
mic+35...	≥0.40 m	≥2.50 m
mic+130...	≥1.10 m	≥8.00 m
mic+340...	≥2.00 m	≥18.00 m
mic+600...	≥4.00 m	≥30.00 m

Fig. 1: Assembly distances, indicating synchronisation/multiplex

Multiplex mode

The Add-on-menu allows to assign an individual address »01« to »10« to each sensor connected via the Sync/Com-channel (Pin5). The sensors perform the ultrasonic measurement sequentially from low to high address. Therefore any influence between the sensors is rejected.

The address »00« is reserved to synchronisation mode and deactivates the multiplex mode. To use synchronised mode all sensors must be set to address »00«.

- Installation**
- ➔ Assemble the sensor at the installation location.
 - ➔ Plug in the connector cable to the M12 connector, see Fig. 2.

			colour
1	+U _B		brown
3	-U _B		blue
4	D		black
2	-		white
5	Sync/Com		grey

Fig. 2: Pin assignment with view onto sensor plug and colour coding of the microsonic connection cable

- Start-up**
- ➔ Connect the power supply.
 - ➔ Set the parameters of the sensor manually via TouchControl (see Fig. 3 and Diagram 1)
 - ➔ or use the Teach-in procedure to adjust the detect points (see Diagram 2).




Fig. 3: TouchControl/LED display

- Factory setting**
- mic+ sensors are delivered factory made with the following settings:
- Switching output on NOC
 - Detecting distance at operating range
 - Measurement range set to maximum range

Maintenance

mic+ sensors work maintenance free. Small amounts of dirt on the surface do not influence function. Thick layers of dirt and caked-on dirt affect sensor function and therefore must be removed.

- Notes**
- mic+ sensors have internal temperature compensation. Because the sensors heat up on their own, the temperature compensation reaches its optimum working point after approx. 30 minutes of operation.
 - During normal operating mode, a yellow LED D2 signals that the switching output has connected.
 - During normal operating mode, the measured distance value is displayed on the LED-indicator in mm (up to 999 mm) or cm (from 100 cm). Scale switches automatically and is indicated by a point on top of the digits.
 - During Teach-in mode, the hysteresis loops are set back to factory settings.
 - If no objects are placed within the detection zone the LED-indicator shows »- - -«.
 - If no push-buttons are pressed for 20 seconds during parameter setting mode the made changes are stored and the sensor returns to normal operating mode.

- The sensor can be reset to its factory setting, see »Key lock and factory setting«, Diagram 3.

Show parameters

➔ In normal operating mode shortly push T1. The LED display shows »PAr.«

Each time you tap push-button T1 the actual settings of the analogue output are shown.

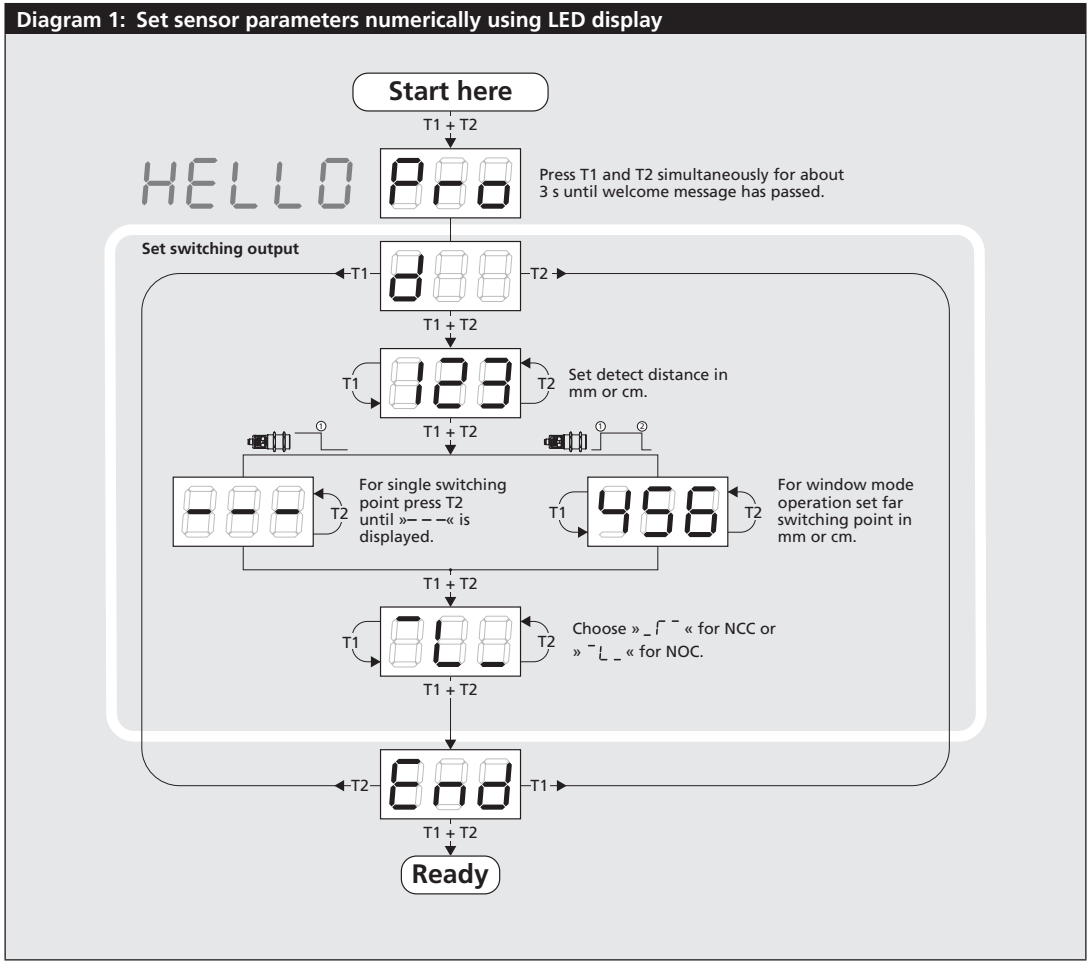


Diagram 2: Set sensor parameters via Teach-in procedure

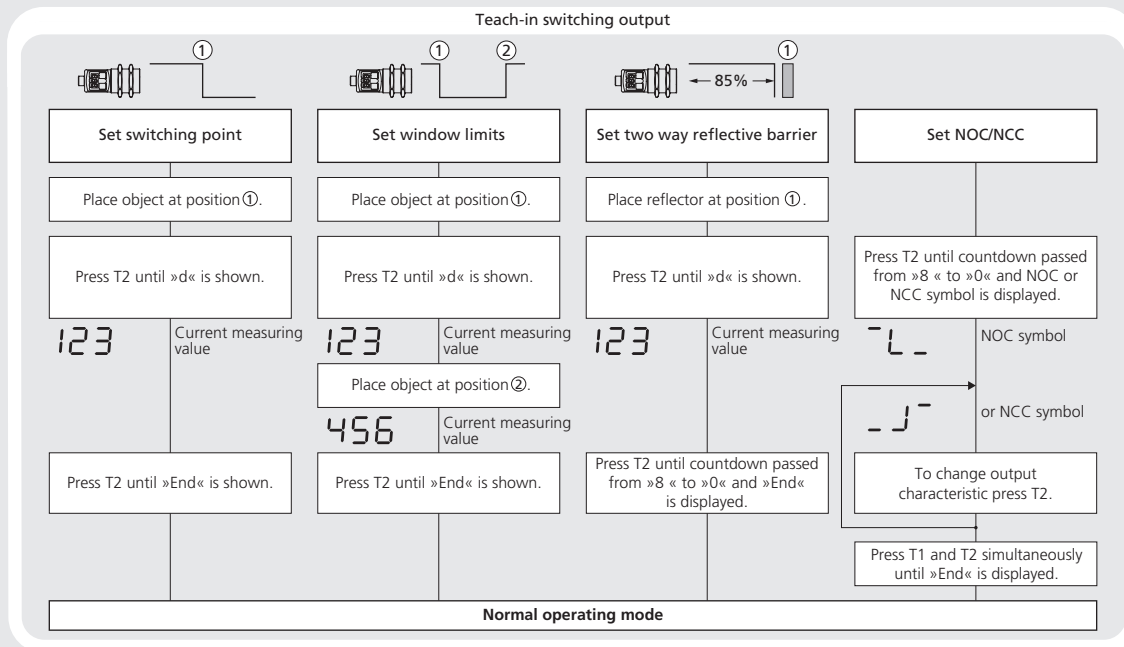


Diagram 3: Key lock and factory setting



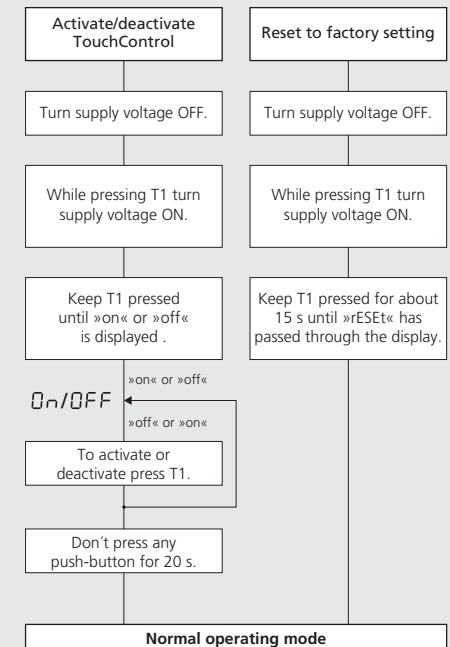


Diagram 4: Useful additional functions in Add-on menu (for experienced users only, settings not required for standard applications)

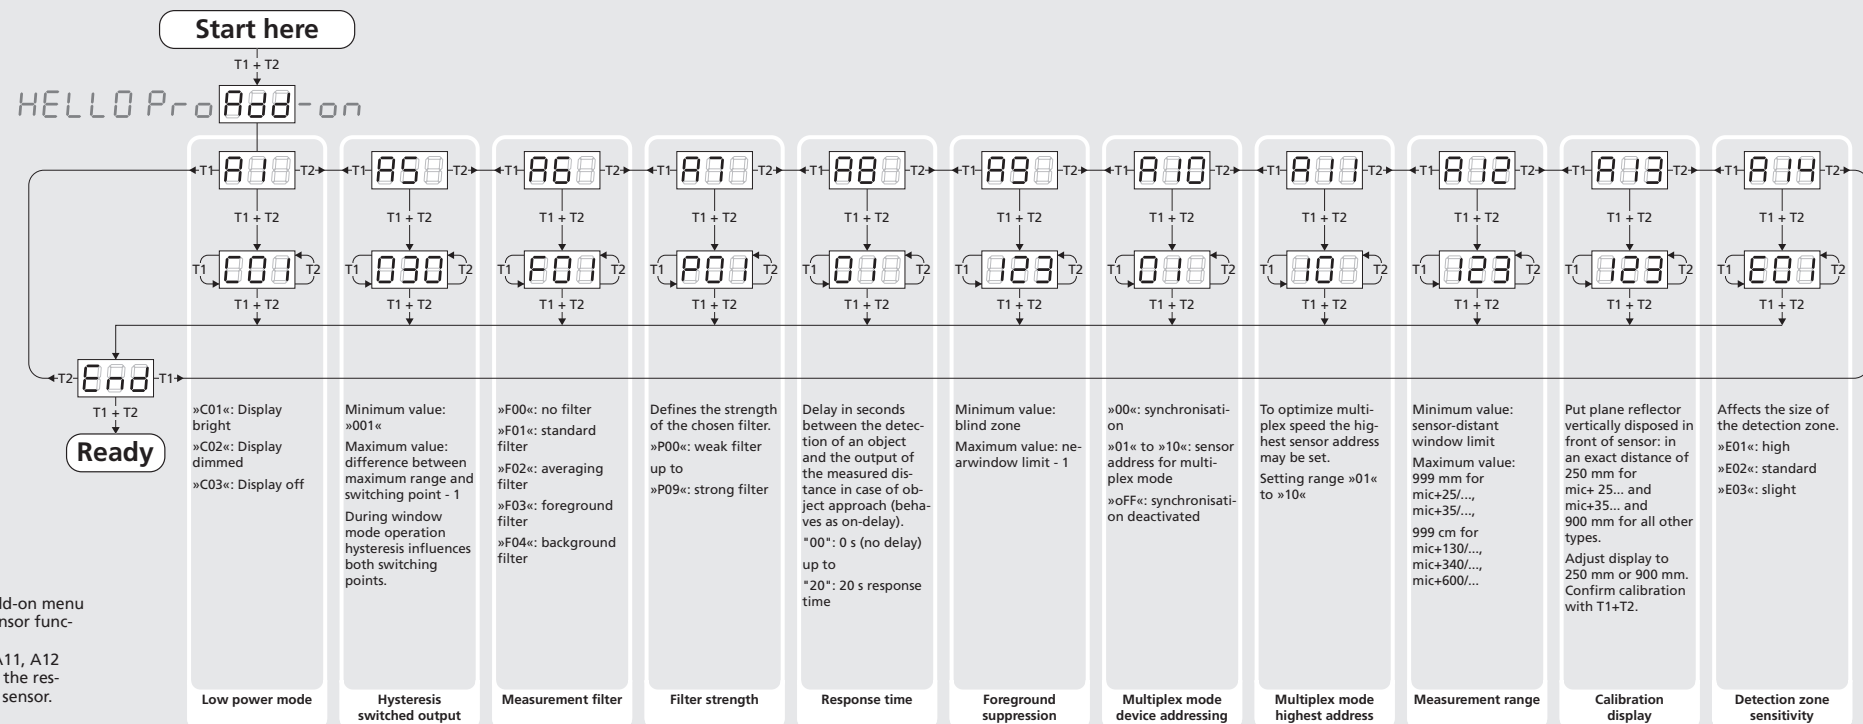


Note
Changes in the Add-on menu may impair the sensor function.
A6, A7, A8, A10, A11, A12 have influence on the response time of the sensor.






Technical data



1 pnp switching output



1 npn switching output



blind zone
operating range
maximum range

0 to 30 mm
250 mm
350 mm

angle of beam spread






see detection zone
320 kHz

transducer frequency
resolution

0.025 mm

detection zones

for different objects:
The dark grey areas represent the zone where it is easy to recognise the normal reflector (round bar). This indicates the typical operating range of the sensors. The light grey areas represent the zone where a very large reflector – for instance a plate – can still be recognised. The requirement here is for an optimum alignment to the sensor. It is not possible to evaluate ultrasonic reflections outside this area.

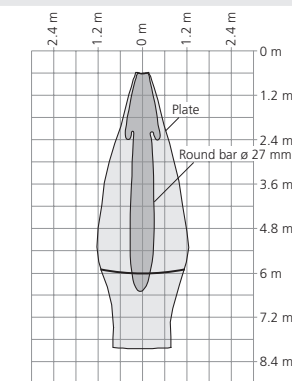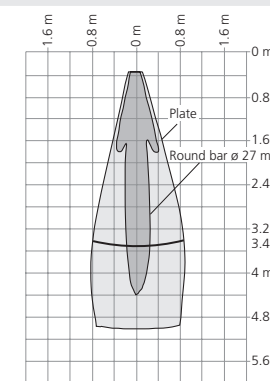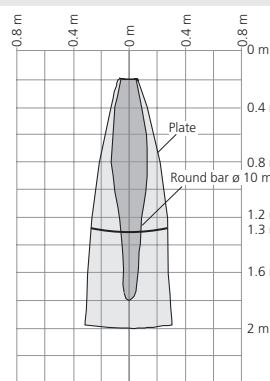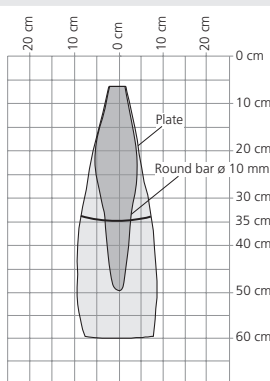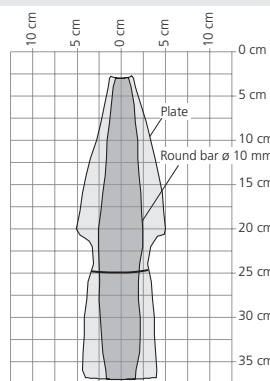

reproducibility
accuracy

±0.15 %
±1 % (Temperature drift internal compensated, may be deactivated ³⁾, 0.17%/K without compensation)
9 to 30 V DC, short-circuit-proof, Class 2

operating voltage U_B

±10 %

voltage ripple

≤ 80 mA

no-load supply current

housing

Brass sleeve, nickel-plated, plastic parts: PBT, TPU;

Ultrasonic transducer: polyurethane foam,

epoxy resin with glass content

class of protection to EN 60529

IP 67

norm conformity

EN 60947-5-2

type of connection

5-pin initiator plug, PBT

controls

2 push-buttons (TouchControl)

indicators

3-digit LED display, 2 three-colour LEDs

programmable

with TouchControl and LinkControl

operating temperature

–25 to +70 °C

storage temperature

–40 to +85 °C

weight

150 g

switching hysteresis ¹⁾

3 mm

switching frequency ²⁾

25 Hz

response time ²⁾

32 ms

time delay before availability

<300 ms

±0.15 %
±1 % (Temperature drift internal compensated, may be deactivated ³⁾, 0.17%/K without compensation)
9 to 30 V DC, short-circuit-proof, Class 2

operating voltage U_B

±10 %

voltage ripple

≤ 80 mA

no-load supply current

housing

Brass sleeve, nickel-plated, plastic parts: PBT, TPU;

Ultrasonic transducer: polyurethane foam,

epoxy resin with glass content

class of protection to EN 60529

IP 67

norm conformity

EN 60947-5-2

type of connection

5-pin initiator plug, PBT

controls

2 push-buttons (TouchControl)

indicators

3-digit LED display, 2 three-colour LEDs

programmable

with TouchControl and LinkControl

operating temperature

–25 to +70 °C

storage temperature

–40 to +85 °C

weight

150 g

switching hysteresis ¹⁾

5 mm

switching frequency ²⁾

12 Hz

response time ²⁾

64 ms

time delay before availability

<300 ms

±0.15 %
±1 % (Temperature drift internal compensated, may be deactivated ³⁾, 0.17%/K without compensation)
9 to 30 V DC, short-circuit-proof, Class 2

operating voltage U_B

±10 %

voltage ripple

≤ 80 mA

no-load supply current

housing

Brass sleeve, nickel-plated, plastic parts: PBT, TPU;

Ultrasonic transducer: polyurethane foam,

epoxy resin with glass content

class of protection to EN 60529

IP 67

norm conformity

EN 60947-5-2

type of connection

5-pin initiator plug, PBT

controls

2 push-buttons (TouchControl)

indicators

3-digit LED display, 2 three-colour LEDs

programmable

with TouchControl and LinkControl

operating temperature

–25 to +70 °C

storage temperature

–40 to +85 °C

weight

150 g

switching hysteresis ¹⁾

20 mm

switching frequency ²⁾

8 Hz

response time ²⁾

92 ms

time delay before availability

<300 ms

±0.15 %
±1 % (Temperature drift internal compensated, may be deactivated ³⁾, 0.17%/K without compensation)
9 to 30 V DC, short-circuit-proof, Class 2

operating voltage U_B

±10 %

voltage ripple

≤ 80 mA

no-load supply current

housing

Brass sleeve, nickel-plated, plastic parts: PBT, TPU;

Ultrasonic transducer: polyurethane foam,

epoxy resin with glass content

class of protection to EN 60529

IP 67

norm conformity

EN 60947-5-2

type of connection

5-pin initiator plug, PBT

controls

2 push-buttons (TouchControl)

indicators

3-digit LED display, 2 three-colour LEDs

programmable

with TouchControl and LinkControl

operating temperature

–25 to +70 °C

storage temperature

–40 to +85 °C

weight

210 g

switching hysteresis ¹⁾

50 mm

switching frequency ²⁾

4 Hz

response time ²⁾

172 ms

time delay before availability

<380 ms

±0.15 %
±1 % (Temperature drift internal compensated, may be deactivated ³⁾, 0.17%/K without compensation)
9 to 30 V DC, short-circuit-proof, Class 2

operating voltage U_B

±10 %

voltage ripple

≤ 80 mA

no-load supply current

housing

Brass sleeve, nickel-plated, plastic parts: PBT, TPU;

Ultrasonic transducer: polyurethane foam,

epoxy resin with glass content

class of protection to EN 60529

IP 67

norm conformity

EN 60947-5-2

type of connection

5-pin initiator plug, PBT

controls

2 push-buttons (TouchControl)

indicators

3-digit LED display, 2 three-colour LEDs

programmable

with TouchControl and LinkControl

operating temperature

–25 to +70 °C

storage temperature

–40 to +85 °C

weight

270 g

switching hysteresis ¹⁾

100 mm

switching frequency ²⁾

3 Hz

response time ²⁾

240 ms

time delay before availability

<450 ms

order No.

switching output

mic+25/D/TC

pnp, U_B = 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+25/E/TC

nnp, –U_B + 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+35/D/TC

pnp, U_B = 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+35/E/TC

nnp, –U_B + 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+130/D/TC

pnp, U_B = 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+130/E/TC

nnp, –U_B + 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+340/D/TC

pnp, U_B = 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+340/E/TC

nnp, –U_B + 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+600/D/TC

pnp, U_B = 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

order No.

switching output

mic+600/E/TC

nnp, –U_B + 2 V, I_{max} = 200 mA

switchable NOC/NCC, short-circuit-proof

¹⁾ Can be programmed via TouchControl and LinkControl. ²⁾ With TouchControl and LinkControl, the selected filter setting and the maximum range influence the switching frequency and the response time.