
Field-Attachable Connectors BCC M435-0000-1A-000-41X575-000

Order Code: BCC06ZF







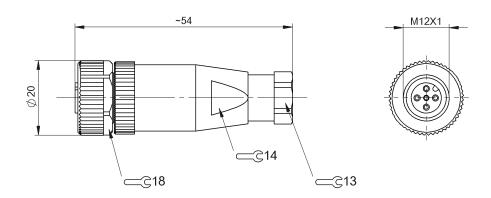

| Basic features                 |                                   | Environmental conditions      |                          |
|--------------------------------|-----------------------------------|-------------------------------|--------------------------|
| Approval/Conformity            | CE<br>cURus<br>WEEE               | Ambient temperature IP rating | -4085 °C<br>IP67         |
| Electrical connection          |                                   | Material                      |                          |
| Electrical confidential        |                                   | Material contact carrier      | PA                       |
| Cable diameter D               | 46 mm                             | Material contacts             | Brass                    |
| Connection                     | M12x1-Female, straight, 5-pin, A- | Material cover nut            | Die-cast zinc            |
|                                | coded                             | Material grip                 | PA                       |
| Number of connectable contacts | 5                                 |                               |                          |
| System                         | Can be fabricated                 | Mechanical data               |                          |
| Electrical data                |                                   | Connection cross-section      | 0.140.75 mm <sup>2</sup> |
| On anating a scale on a lile   | 105 VDO / 105 VAO                 | Tightening torque pigtail     | 0.6 Nm                   |
| Operating voltage Ub           | 125 VDC / 125 VAC                 | Type of wire mounting         | Screw terminals          |
| Rated current (40 °C)          | 4.0 A                             |                               |                          |
| Remarks                        |                                   |                               |                          |

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

