

Field-Attachable Connectors
BCC A334-0000-20-000-61X4A5-000
Order Code: BCC070A







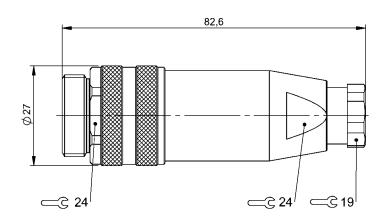



Basic features		Environmental conditions	
Approval/Conformity	CE cURus WEEE	Ambient temperature IP rating	-2585 °C IP67
Electrical connection		Material	
		Material contact carrier	PUR, PA
Cable diameter D	810 mm	Material contacts	Brass
Connection	7/8"-16 UN-Male, straight, 4-pin	Material cover nut	Die-cast zinc
Number of connectable contacts	4	Material grip	PBT
System	Can be fabricated	- '	
Electrical data		Mechanical data	
LICUITORI UALA		Connection cross-section	0.141.5 mm <sup>2</sup>
Operating voltage Ub	600 VDC / 600 VAC	Tightening torque pigtail	1.5 Nm
Rated current (40 °C)	9.0 A	Type of wire mounting	Screw terminals

## Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

## Connector Drawings



PIN 1-4 usable