

Field-Attachable Connectors
BCC A334-0000-20-000-71X4A5-000
Order Code: BCC070C







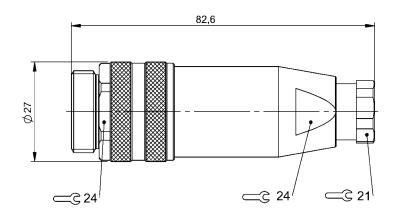



Basic	reatures	

Approval/Conformity CE cURus WEEE

Electrical connection

 Cable diameter D
 10...12 mm

 Connection
 7/8"-16 UN-Male, straight, 4-pin

 Number of connectable contacts
 4

 System
 Can be fabricated

Electrical data

Operating voltage Ub600 VDC / 600 VACRated current (40 °C)9.0 A

Environmental conditions

 $\begin{array}{lll} \mbox{Ambient temperature} & -25...85\,^{\circ}\mbox{C} \\ \mbox{IP rating} & \mbox{IP67} \\ \end{array}$

Material

Material contact carrierPUR, PAMaterial contactsBrassMaterial cover nutDie-cast zincMaterial gripPBT

Mechanical data

 Connection cross-section
 0.14...1.5 mm²

 Tightening torque pigtail
 1.5 Nm

 Type of wire mounting
 Screw terminals

Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings



PIN 1-4 usable