

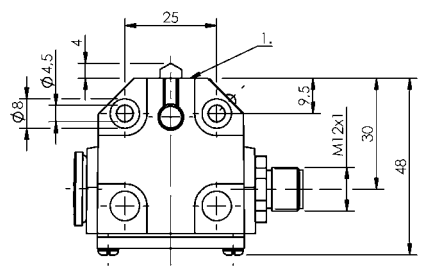


Mechanical Cam Switches
BNS 819-B03-D08-40-11-S4R
Order Code: BNS01RR

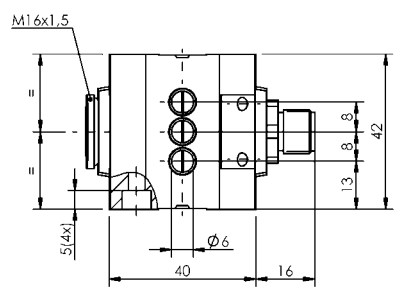

1) Reference edge



Basic features

Additional features	without ground conductor connection
Approval/Conformity	CE UKCA CCC WEEE
Basic standard	IEC 60947-5-1
Operating principle	1-3. Switch position: Mechanical
Version	Snap contact

Display/Operation

Function indicator	1-3. Switch position: None
--------------------	----------------------------

Electrical connection

Connection	M12x1-Flange male, 4-pin, A-coded
Connection type	1. Switch position: Connector

Electrical data

Continuous current	1-3. Switch position: 4 A
Rated operating voltage Ue	1-3. Switch position: 25 V AC/60 V DC
Switching function mechanical	Single-pin changeover
Switching rate	1-3. Switch position: 200/min

Environmental conditions

Ambient temperature	-5...85 °C
IP rating	IP67

Functional safety

B10d (EN ISO 13849-1)	BSE 70.1: 10 mil. switching cycles
-----------------------	------------------------------------

Material

Housing material	Aluminium, Anodized
Housing material, surface protection	Anodized
Material contacts	1-3. Switch position: Silver
Plunger material	1-3. Switch position: 1.4034 stainless steel


Mechanical data

Approach direction	longitudinal, parallel to attachment surface
Approach speed	1-3. Switch position: 20 m/min
Distance cam - reference edge	1-3. Switch position: 2.30...2.80 mm
Flange, feed-through	None
Installation	Vertical
Life expectancy mechanical	1-3. Switch position: 10 mil. switching operations
Number of switching positions	3x Chisel Mechanical
Plunger style	1-3rd switch position: Chisel
Switch actuation force	1-3. Switch position: 8 N
Switching element	1-3. Switch position: BSE 70.1

Range/Distance


Reproducibility	1-3. Switch position: ±0.02 mm
-----------------	--------------------------------

Connector Drawings



View of connector side

Wiring Diagrams



ACHTUNG: Stecker ohne Schutzleiter!
Schutzklasse III (VDE 0160)

Attention: No groundwire!
Protection Class III (VDE 0160)