




1) Reference edge, 2) Sealing ring, 3) Cable passage

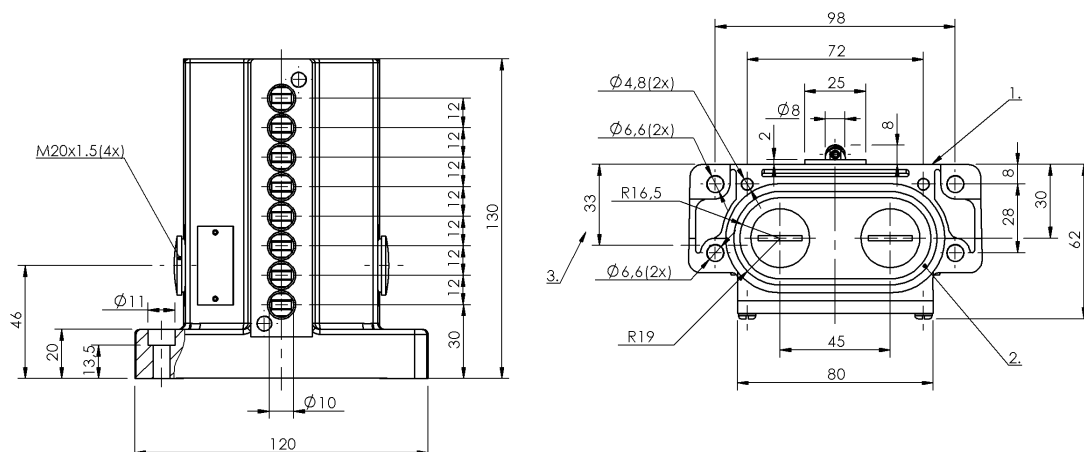

Environmental conditions

Ambient temperature	-5...85 °C
IP rating	IP67

Material

Housing material	Aluminum, Anodized
Housing material, surface protection	Anodized

Mechanical data

Approach direction	longitudinal, parallel to attachment surface
Dimension	120 x 130 x 64 mm
Flange, feed-through	2 threaded exit M20
Installation	Vertical
Number of switching positions	8x Roller bearing Mechanical
Plunger spacing 1st switch position	30 mm
Plunger style	1-8th switch position: Roller bearing 1-8th switch position: Roller bearing

Range/Distance

Switch position spacing	12 mm
-------------------------	-------

Wiring Diagrams

BSE 30.0

