

Universal Temperature Converter KCD2-UT2-Ex1

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Thermocouple, RTD, potentiometer or voltage input
- Current output 0/4 mA ... 20 mA
- Sink or source mode
- Configurable by PACTware
- Line fault (LFD) and sensor burnout detection
- Up to SIL 2 acc. to IEC/EN 61508 / IEC/EN 61511












Function

This isolated barrier is used for intrinsic safety applications.

The device converts RTD input signals or thermocouple input signals in the hazardous area to 0/4 mA ... 20mA signals in the safe area. The removable terminal block KC-CJC-** is available for thermocouples when internal cold junction compensation is desired. A fault is indicated by an LED and by user-configured fault indication outputs.

If the device is operated via Power Rail, additionally a collective error message is available. The device is easily configured by the use of the PACTware configuration software. For additional information, refer to the manual and www.pepperl-fuchs.com.

Connection

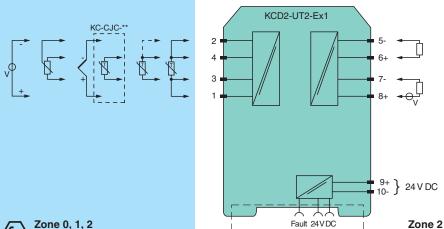

Power Rail



Release date: 2023-01-03 Date of issue: 2023-01-03 Filename: 225696_eng.pdf

Zone 0, 1, 2 Div. 1, 2

Technical Data

	Analog input
	SIL 2
	terminals 9+, 10- or power feed module/Power Rail
U _r	19 30 V DC
	within the supply tolerance
	≤ 0.98 W
	max. 0.98 W
	Ur




Div. 2

Technical Data

Interface	
Programming interface	programming socket
Input	
Connection side	field side
Connection	terminals 1, 2, 3, 4
RTD	type Pt10, Pt50, Pt100, Pt500, Pt1000 (EN 60751: 1995) type Pt10GOST, Pt50GOST, Pt100GOST, Pt500GOST, Pt1000GOST (6651-94) type Cu10, Cu50, Cu100 (P50353-92) type Ni100 (DIN 43760)
Measuring current	approx. 200 μA with RTD
Types of measuring	2-, 3-, 4-wire connection
Lead resistance	max. 50Ω per line
Measurement loop monitoring	sensor breakage, sensor short-circuit
Thermocouples	type B, E, J, K, N, R, S, T (IEC 584-1: 1995) type L (DIN 43710: 1985) type TXK, TXKH, TXA (P8.585-2001)
Cold junction compensation	external and internal
Measurement loop monitoring	sensor breakage
Potentiometer	$0 \dots 20 \ k\Omega$ (2-wire connection), $0.8 \dots 20 \ k\Omega$ (3-wire connection)
Voltage	selectable within the range -100 100 mV
Input resistance	\geq 1 M Ω (-100 100 mV)
Output	
Connection side	control side
Connection	terminal 5: source (-), terminal 6: source (+), terminal 7: sink(-), terminal 8: sink (+)
Output	Analog current output
Current range	0 20 mA or 4 20 mA
Fault signal	downscale 0 or 2 mA, upscale 21.5 mA (acc. NAMUR NE43)
Source	load 0 550 Ω open-circuit voltage \leq 18 V
Sink	Voltage across terminals 5 30 V. If the current is supplied from a source > 16.5 V, series resistance of \geq (V - 16.5)/0.0215 Ω is needed, where V is the source voltage. The maximum value of the resistance is (V - 5)/0.0215 Ω .
Transfer characteristics	
Deviation	
After calibration	Pt100: \pm (0.06 % of measurement value in K + 0.1 % of span + 0.1 K (4-wire connection)) thermocouple: \pm (0.05 % of measurement value in °C + 0.1 % of span + 1.5 K (1.7 K for types R and S)) , includes \pm 1.3 K fault of the cold junction compensation (CJC) mV: \pm (50 μ V + 0.1 % of span) potentiometer: \pm (0.05 % of full scale + 0.1 % of span, (excludes faults due to lead resistance))
Influence of ambient temperature	Pt100: \pm (0.0015 % of measurement value in K + 0.006 % of span)/K ΔT_{amb}^*) thermocouple: \pm (0.02 K + 0.005 % of measurement value in °C + 0.006 % of span)/K ΔT_{amb}^*), influence of cold junction compensation (CJC) included mV: \pm (0.01 % of measurement value + 0.006 % of span)/K ΔT_{amb}^*) potentiometer: \pm 0.006 % of span/K ΔT_{amb}^*) $\Delta T_{amb} =$ ambient temperature change referenced to 23 °C (296 K)
Influence of supply voltage	< 0.01 % of span
Influence of load	\leq 0.001 % of output value per 100 Ω
Reaction time	worst case value (sensor breakage and/or sensor short circuit detection enabled) mV: 1 s, thermocouples with CJC: 1.1 s, thermocouples with fixed reference temperature: 1.1 s, 3- or 4-wire RTD: 920 ms, 2-wire RTD: 800 ms, Potentiometer: 2.05 s
Galvanic isolation	
Output/supply, programming input	functional insulation, rated insulation voltage 50 V AC There is no electrical isolation between the programming input and the supply. The programming cable provides galvanic isolation so that ground loops are avoided.
Indicators/settings	
Display elements	LEDs
Configuration	via PACTware
Labeling	space for labeling at the front
Directive conformity	


Technical Data		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2012 EN 61326-3-2:2008
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2004
Ambient conditions		
Ambient temperature		-20 70 °C (-4 158 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		12.5 x 119 x 114 mm (0.5 x 4.7 x 4.5 inch) (W x H x D) , housing type A2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with haza	rdous a	reas
EU-type examination certificate		BASEEFA 13 ATEX 0102 X
Marking		⑤ II (1)G [Ex ia Ga] IIC, ⑥ II (1)D [Ex ia Da] IIIC, ⑥ I (M1) [Ex ia Ma] I
Input		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
Inputs		terminals 1, 2, 3, 4
Voltage U₀		9 V
Current I _o		13.1 mA
Power Po		30 mW
Analog outputs, power supply, collective error		
Maximum safe voltage	U_{m}	250 V (Attention! This is not the rated voltage.)
Interface		
Maximum safe voltage	U _m	250 V (Attention! The rated voltage is lower.), RS 232
Certificate		BASEEFA 13 ATEX 0103 X
Marking		
Galvanic isolation		
Input/Other circuits		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		, 0,
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020, EN 60079-11:2012, EN 60079-15:2010
International approvals		
UL approval		
Control drawing		116-0379 (cULus)
IECEx approval		()
IECEx certificate		IECEx BAS 13.0057X
IECEx marking		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
General information		



Supplementary information

Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com.

Assembly

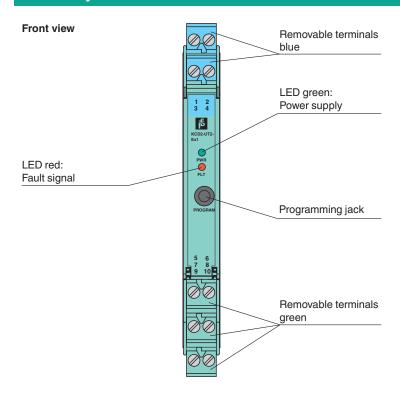

Matching System Components

<u></u>	DTM Interface Technology	Device type manager (DTM) for interface technology
PACTware V	PACTware 5.0	FDT Framework
	K-ADP-USB	Programming adapter with USB interface
	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories

K-250R	Measuring resistor

Accessories K-500R0%1 Measuring resistor KC-CJC-1BU Resistance thermometer for cold junction compensation for KC modules KC-ST-5GN Terminal block for KC modules, 2-pin screw terminal, green KC-ST-5BU Terminal block for KC modules, 2-pin screw terminal, blue KF-CP Red coding pins, packaging unit: 20 x 6