



HART Output Isolator with Shutdown Input

FB4205C2


- 4-channel
- Outputs Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Analog output module for 0/4 mA ... 20 mA
- HART communication via field bus or service bus
- Simulation mode for service operations (forcing)
- Line fault detection (LFD): one LED per channel
- Permanently self-monitoring
- Output with bus-independent safety shutdown

CE  **SIL 2**

Function

The device drives positioners, proportional valves, I/P converters, or local indicators.
Open and short-circuit line faults are detected.
The output can be switched off via a contact. This can be used for bus-independent safety applications.
The output is galvanically isolated from the bus and the power supply.

Connection

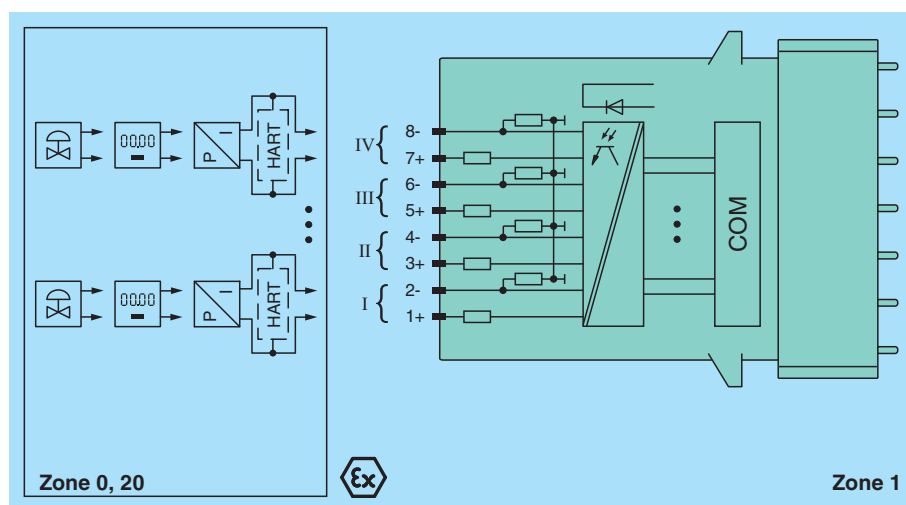

Technical Data

Slots

Occupied slots 2

Functional safety related parameters

Safety Integrity Level (SIL) SIL 2

Supply

| | |
|-------------------|--|
| Connection | backplane bus |
| Rated voltage | U _r 12 V DC , only in connection with the power supplies FB92** |
| Power dissipation | 2.15 W |
| Power consumption | 3.3 W |

Internal bus

Technical Data

| | | |
|----------------------------------|--|--|
| Connection | | backplane bus |
| Interface | | manufacturer-specific bus to standard com unit |
| Analog input | | |
| HART communication | | yes |
| HART secondary variable | | no |
| Analog output | | |
| Number of channels | | 4 |
| Suitable field devices | | |
| Field device | | Proportional Valve |
| Field device [2] | | I/P converters |
| Field device [3] | | on-site display |
| Connection | | terminals 1+, 2-; 3+, 4-; 5+, 6-; 7+, 8- |
| Current | | 0 ... 20 mA short-circuit protected |
| Line fault detection | | can be switched on/off for each channel via configuration tool , configurable via configuration tool |
| Short-circuit | | No |
| Open-circuit | | deviation of preset output value > 0.5 mA |
| Load | | max. 750 Ω at 20 mA |
| HART communication | | yes |
| HART secondary variable | | yes |
| Watchdog | | within 0.5 s the device goes in safe state, e.g. after loss of communication |
| Transfer characteristics | | |
| Deviation | | |
| After calibration | | 0.1 % of the signal range at 20 °C (68 °F) |
| Influence of ambient temperature | | 0.1 %/10 K of the signal range |
| Refresh time | | 100 ms |
| Indicators/settings | | |
| LED indication | | Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1-4) red: line fault (lead breakage or short circuit) |
| Coding | | optional mechanical coding via front socket |
| Directive conformity | | |
| Electromagnetic compatibility | | |
| Directive 2014/30/EU | | EN 61326-1:2013 |
| Conformity | | |
| Electromagnetic compatibility | | NE 21:2007 |
| Degree of protection | | IEC 60529:2000 |
| Environmental test | | EN 60068-2-14:2009 |
| Shock resistance | | EN 60068-2-27:2009 |
| Vibration resistance | | EN 60068-2-6:2008 |
| Damaging gas | | EN 60068-2-42:2003 |
| Relative humidity | | EN 60068-2-78:2001 |
| Ambient conditions | | |
| Ambient temperature | | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | | -25 ... 85 °C (-13 ... 185 °F) |
| Relative humidity | | 95 % non-condensing |
| Shock resistance | | shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18 |
| Vibration resistance | | frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance |
| Damaging gas | | designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3 |
| Mechanical specifications | | |

Release date: 2023-06-13 Date of issue: 2023-06-13 Filename: 239059_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Technical Data

| | | |
|---|--|--|
| Degree of protection | IP20 (module) , a separate housing is required acc. to the system description | |
| Connection | | removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²) |
| Mass | approx. 750 g | |
| Dimensions | 57 x 107 x 132 mm (2.2 x 4.2 x 5.2 inch) | |
| Data for application in connection with hazardous areas | | |
| EU-type examination certificate | | BVS 12 ATEX E 015 X |
| Marking | Ⓜ II 2(1) G Ex d [ia Ga] IIC T4 Gb Ⓜ II (1) D [Ex ia Da] IIIC | |
| Output | | |
| Voltage | U _o | 27 V |
| Current | I _o | 87 mA |
| Power | P _o | 575 mW (linear characteristic) |
| Galvanic isolation | | |
| Output/power supply, internal bus | safe electrical isolation acc. to EN 60079-11:2007 , voltage peak value 375 V | |
| Directive conformity | | |
| Directive 2014/34/EU | EN IEC 60079-0:2018+AC:2020 EN 60079-1:2014 EN 60079-11:2012 | |
| International approvals | | |
| ATEX approval | BVS 12 ATEX E 015 X | |
| General information | | |
| System information | The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate. | |
| Supplementary information | EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com . | |

Assembly

Front view

