




DoorScan® door transition cable


DoorScan Transfer Loop



- Door transition cable to connect the sensor to the controller
- Connection to interface module

Door transition cable to door controller for DoorScan® sensor, including cable sheathing and strain relief

Dimensions

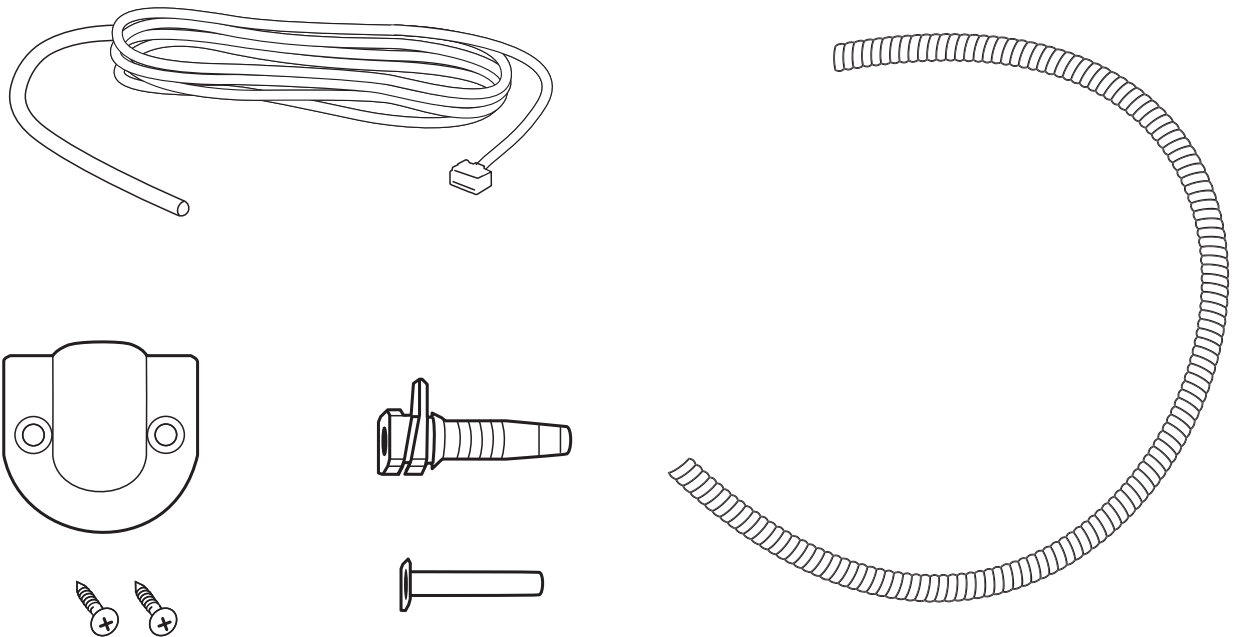

Technical Data

Electrical specifications

Operating voltage	U_B	max. 300 V
-------------------	-------	------------

Ambient conditions

Ambient temperature	-25 ... 80 °C (-13 ... 176 °F)
---------------------	--------------------------------

Mechanical specifications

Release date: 2020-09-10 Date of issue: 2020-10-08 Filename: 247291_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Connection		screw terminal , 6-pin
Material		Cable sheathing: polyamide PA 6, black , Wall bracket: ABS
Cable		PUR, gray, 6-wire
Sheath diameter		approx. 4.8 mm
Bending radius		min. 48 mm
Length	L	5000 mm
Mass		approx. 110 g
General information		
Scope of delivery		Wall bracket , Screw kit , cord grip , cable , Cable sheathing , Hollow rivet
Suitable series		
Series		DoorScan®

Mounting

Wall mount bracket



1	BN	24V
2	BU	0V
3	GY	TEST
4		STANDBY
5	BK	BS OUT
6	WH	BGS OUT