



RTD Converter LB5104A

- 4 channels
- Inputs Ex ia
- Mounting in Zone 2, Class I/Div.2 or in the safe area
- Converter for 2-, 3- and 4-wire RTDs (Pt100 ... Pt1000), slide wire sensors etc.
- Simulation mode for service operations (forcing)
- Line fault detection (LFD)
- Permanently self-monitoring
- Module can be exchanged under voltage




Function

The RTD converter accepts 2-, 3-, 4-wire RTD signals (Pt100 ... Pt1000) and slide-wire sensors from the field. Ni100 through Ni1000 can also be connected.

Open and short-circuit line faults are detected.

The intrinsically safe inputs are galvanically isolated from the bus and the power supply.

Connection

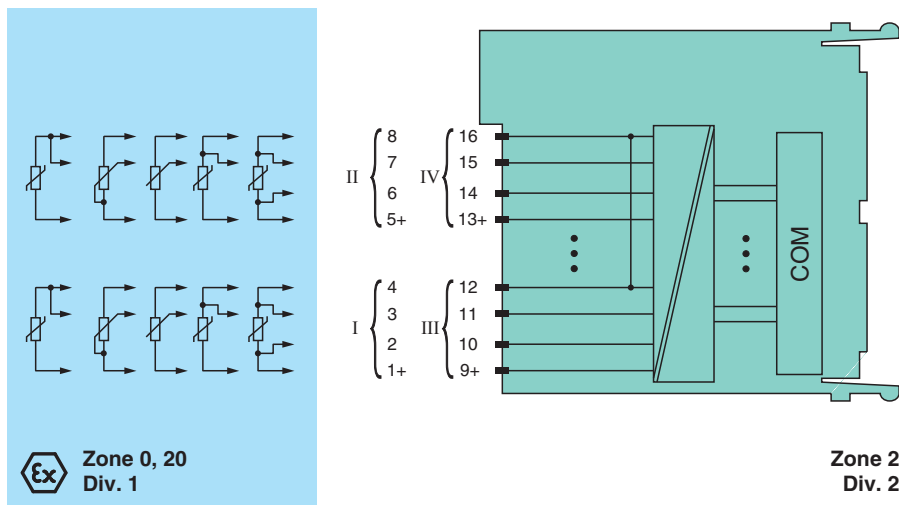

Technical Data

Slots		
Occupied slots	2	
Supply		
Connection	backplane bus	
Rated voltage	U _r	12 V DC , only in connection with the power supplies LB9***
Power dissipation	0.35 W	
Power consumption		0.35 W
Internal bus		
Connection		backplane bus
Interface	manufacturer-specific bus to standard com unit	
temperature input		
Number of channels	4	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Suitable field devices		
Field device		resistance thermometer
Field device [2]		slide-wire sensors
Field device [3]		potentiometer
Field device interface		
Connection		2-wire sensor
Connection [2]		3-wire sensor
Connection [3]		4-wire sensor
Connection		channel I: resistance/potentiometer input 1 ... 4 channel II: resistance/potentiometer input 5 ... 8 channel III: resistance/potentiometer input 9 ... 12 channel IV: resistance/potentiometer input 13 ... 16
Measuring range		Pt100 (18-390 Ω) (500 Ω incl. line resistance) Pt200 (37-780 Ω) Pt500 (92-1952 Ω) Pt1000 (185-3905 Ω) Ni100 (69-270 Ω) Ni500 (345-1350 Ω) Ni1000 (690-2700 Ω)
Slide-wire sensor		0 ... 10 kΩ
Measuring current		200 μA
Smallest span		50 Ω for 0.1 % accuracy
Linearity error		0.1 %
Conversion time		max. 500 ms (4 channels) max. 1 s (for 4x 3-wire Pt100)
Busy after download		5 ... 15 s
Lead resistance		max. 50 Ω per strand
Line fault detection		can be switched on/off for each channel via configuration tool
Short-circuit		< 10 Ω
Open-circuit		> 1 kΩ
Transfer characteristics		
Deviation		
Influence of ambient temperature		max. 0,1 %/10 K
Indicators/settings		
LED indication		Power LED (P) green: supply Status LED (I) red: line fault (collective alarm) , red flashing: communication error
Coding		optional mechanical coding via front socket
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Conformity		
Electromagnetic compatibility		NE 21
Degree of protection		IEC 60529
Environmental test		EN 60068-2-14
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Damaging gas		EN 60068-2-42
Relative humidity		EN 60068-2-78
Ambient conditions		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		95 % non-condensing
Altitude		max. 2000 m
Shock resistance		shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration ± 0.075 mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration ± 1 mm/0.7 g; 90 minutes at each resonance


Release date: 2025-03-03 Date of issue: 2025-03-03 Filename: 254810_eng.pdf

Technical Data

Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Degree of protection		IP20 when mounted on backplane
Connection		removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm ²) or screw terminals (0.08 ... 1.5 mm ²)
Mass		approx. 150 g
Dimensions		32.5 x 100 x 102 mm (1.28 x 3.9 x 4 inch)
Data for application in connection with hazardous areas		
EU-type examination certificate		PTB 03 ATEX 2042 X
Marking		Ⓔ II (1)G [Ex ia Ga] IIC Ⓔ II (1)D [Ex ia Da] IIIC Ⓔ I (M1) [Ex ia Ma] I
Input		
Voltage	U _o	7.14 V
Current	I _o	70 mA
Power	P _o	123 mW (linear characteristic)
Certificate		PF 08 CERT 1234 X
Marking		Ⓔ II 3 G Ex nA IIC T4 Gc
Galvanic isolation		
Input/power supply, internal bus		safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 EN 60079-11:2012 EN 60079-15:2010
International approvals		
ATEX approval		PTB 03 ATEX 2042 X
UL approval		E106378
IECEx approval		
IECEx certificate		IECEx BVS 09.0037X
IECEx marking		Ex nA [ia Ga] IIC T4 Gc [Ex ia Da] IIIC [Ex ia Ma] I
General information		
System information		The module has to be mounted in appropriate backplanes (LB9***) in Zone 2 or outside hazardous areas. Here, observe the corresponding declaration of conformity. For use in hazardous areas (e. g. Zone 2, Zone 22 or Div. 2) the module must be installed in an appropriate enclosure.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

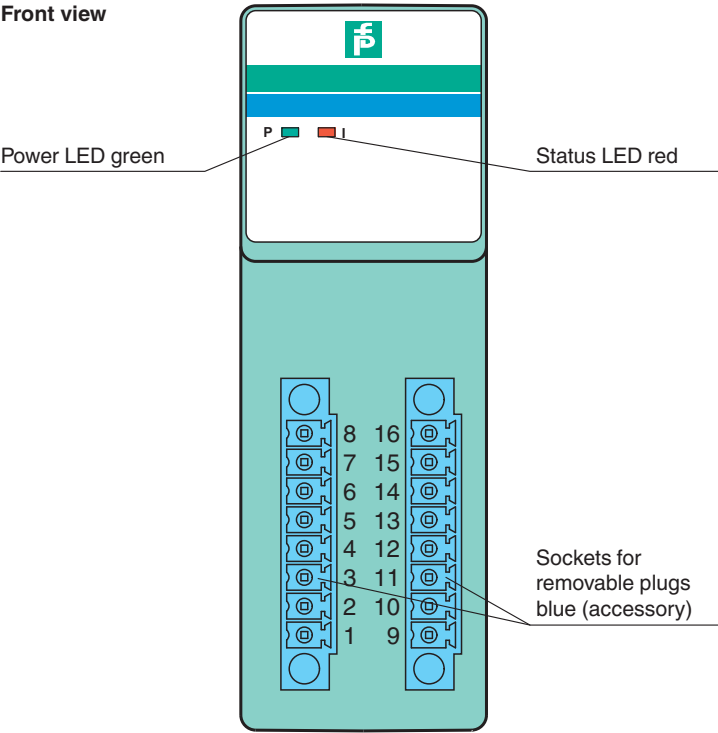

Release date: 2025-03-03 Date of issue: 2025-03-03 Filename: 254810_eng.pdf