



## Transmitter Power Supply

## KFD2-CRG2-Ex1.D

- 1-channel isolated barrier
  - 24 V DC supply (Power Rail)
  - Input 2-wire and 3-wire transmitters and 2-wire current sources
  - Output 0/4 mA ... 20 mA
  - 2 relay contact outputs
  - Adjustable energized/de-energized delay
  - Programmable high/low alarm
  - Linearization function (max 20 points)
  - Line fault detection (LFD)
  - Up to SIL 2 acc. to IEC/EN 61508 / IEC/EN 61511



## Function

This isolated barrier is used for intrinsic safety applications.

The device supplies 2-wire and 3-wire transmitters, and can also be used with current sources.

Two relays and an active 0/4 mA to 20 mA current source are available as outputs. The relay contacts and the current output can be integrated in safety-relevant circuits. The current output is easily scaled.

On the display the measured value can be indicated in various physical units. The display is easily configurable to be in accordance with the PACT system.



The device is easily configured by the use of keypad or with the PACTware configuration software. The input has a built-in fault detection.

The input has a line fault detection. A fault is signalled to LEP and a

A fault is signalized by LEDs and a separate collective error message output. For additional information, refer to the manual and [www.papercraft-fuchs.com](http://www.papercraft-fuchs.com).

For additional information, refer to the manual and [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

## Connection

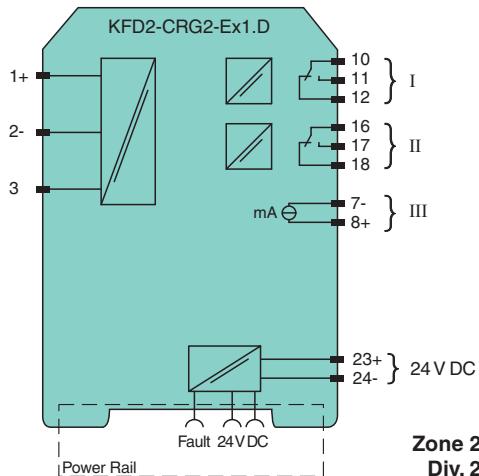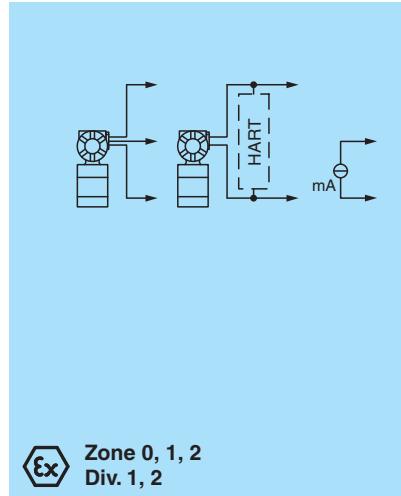

## Technical Data

## General specifications

## Functional safety related parameters

## Supply

Connection Power Rail or terminals 23+, 24-

Rated voltage  $U_r$  20 ... 30 V DC

Rated current  $I_r$  approx. 130 mA

## Technical Data

Power consumption	2.5 W
<b>Interface</b>	
Programming interface	programming socket
<b>Input</b>	
Connection side	field side
Connection	terminals 1, 2, 3
Input I	
Input signal	0/4 ... 20 mA
Available voltage	≥ 15 V at 20 mA
Open circuit voltage/short-circuit current	24 V / 33 mA
Input resistance	45 Ω (terminals 2, 3)
Line fault detection	breakage I < 0.2 mA; short-circuit I > 22 mA
<b>Output</b>	
Connection side	control side
Connection	output I: terminals 10, 11, 12 output II: terminals 16, 17, 18 output III: terminals 8+, 7-
Output signal	0 ... 20 mA or 4 ... 20 mA
Output I, II	signal, relay
Contact loading	253 V AC / 2 A / cos φ ≥ 0.7 ; 40 V DC / 2 A
Mechanical life	5 x 10 <sup>7</sup> switching cycles
Output III	Signal, analog
Current range	0 ... 20 mA or 4 ... 20 mA
Open loop voltage	max. 24 V DC
Load	max. 650 Ω
Fault signal	downscale I ≤ 3.6 mA, upscale I ≥ 21 mA (acc. NAMUR NE43)
Energized/De-energized delay	0 ... 250 s , adjustable
<b>Transfer characteristics</b>	
Input I	
Accuracy	< 30 μA
Influence of ambient temperature	0.003 %/K (30 ppm)
Output I, II	
Response delay	≤ 200 ms at bounce from 0 ... 20 mA
Output III	
Resolution	≤ 10 μA
Accuracy	< 20 μA
Influence of ambient temperature	0.005 %/K (50 ppm)
Reaction time	< 650 ms at bounce from 0 ... 20 mA at the input, 90 % of output full-scale value
<b>Galvanic isolation</b>	
Input/Other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output I, II/other circuits	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Mutual output I, II, III	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
Output III/power supply and collective error	functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub>
Interface/power supply and collective error	functional insulation acc. to IEC 62103, rated insulation voltage 50 V <sub>eff</sub>
<b>Indicators/settings</b>	
Display elements	LEDs , display
Control elements	Control panel
Configuration	via operating buttons via PACTware
Labeling	space for labeling at the front
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Low voltage	

## Technical Data


Directive 2014/35/EU	EN 61010-1:2010	
<b>Conformity</b>		
Electromagnetic compatibility	NE 21:2006	
Degree of protection	IEC 60529:2001	
<b>Ambient conditions</b>		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
<b>Mechanical specifications</b>		
Degree of protection	IP20	
Connection	screw terminals	
Mass	300 g	
Dimensions	40 x 119 x 115 mm (1.6 x 4.7 x 4.5 inch) (W x H x D) , housing type C2	
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001	
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate	TÜV 01 ATEX 1701	
Marking	 II (1)G [Ex ia Ga] IIC  II (1)D [Ex ia Da] IIIC  I (M1) [Ex ia Ma] I	
Input	Ex ia	
Supply		
Maximum safe voltage	$U_m$	40 V DC (Attention! The rated voltage can be lower.)
Equipment	terminals 1+, 3-	
Voltage	$U_o$	25.8 V
Current	$I_o$	93 mA
Power	$P_o$	0.603 W
Equipment	terminals 2-, 3	
Voltage	$U_i$	< 30 V
Current	$I_i$	115 mA
Voltage	$U_o$	5 V
Current	$I_o$	0.3 mA
Power	$P_o$	0.3 mW
Equipment	terminals 1+, 2 / 3-	
Voltage	$U_o$	25.8 V
Current	$I_o$	112 mA
Power	$P_o$	720 mW
Output I, II	terminals 10, 11, 12; 16, 17, 18 non-intrinsically safe	
Maximum safe voltage	$U_m$	253 V AC / 40 V DC (Attention! $U_m$ is no rated voltage.)
Contact loading	253 V AC/2 A/cos φ > 0.7; 40 V DC/2 A resistive load	
Output III	terminals 8+, 7- non-intrinsically safe	
Maximum safe voltage	$U_m$	40 V (Attention! The rated voltage can be lower.)
Interface	RS 232	
Maximum safe voltage	$U_m$	40 V (Attention! The rated voltage can be lower.) , RS 232
Certificate	TÜV 02 ATEX 1885 X	
Marking	 II 3G Ex nA nC IIC T4	
Output I, II		
Contact loading	50 V AC/2 A/cos φ > 0.7; 40 V DC/2 A resistive load	
Galvanic isolation		
Input/Other circuits	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V	
Directive conformity		
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010	
<b>International approvals</b>		
FM approval		
Control drawing	16-554FM-12 (cFMus)	
UL approval	E223772	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

## Technical Data

IECEx approval	IECEx TUN 09.0007 IECEx TSA 18.0007X
IECEx certificate	
IECEx marking	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I Ex ec nC IIC T4 Gc
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

## Assembly

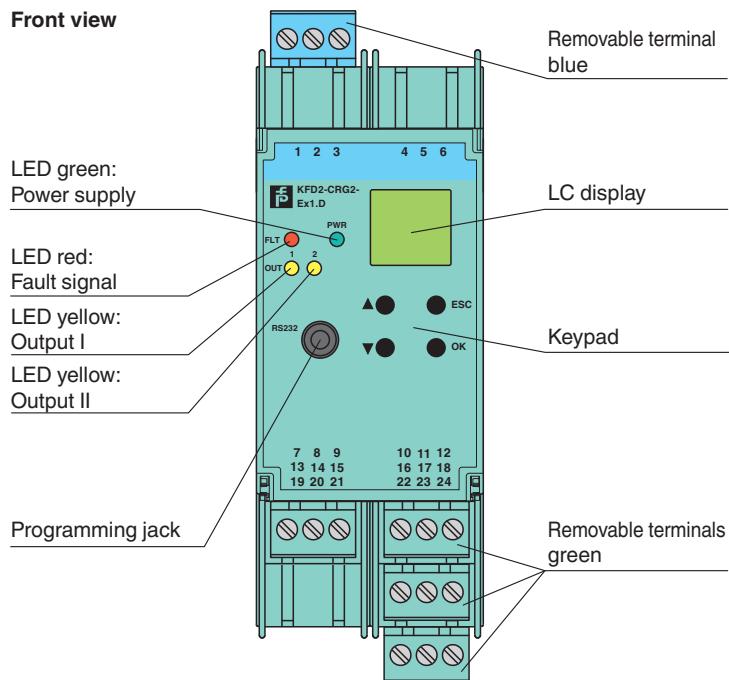

## Matching System Components

	<b>DTM Interface Technology</b>	Device type manager (DTM) for interface technology
	<b>PACTware 5.0</b>	FDT Framework
	<b>K-ADP-USB</b>	Programming adapter with USB interface
	<b>KFD2-EB2</b>	Power Feed Module
	<b>UPR-03</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	<b>UPR-03-M</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	<b>UPR-03-S</b>	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m

## Matching System Components

	<b>K-DUCT-BU</b>	Profile rail, wiring comb field side, blue
	<b>K-DUCT-BU-UPR-03</b>	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

## Accessories

	<b>K-250R</b>	Measuring resistor
	<b>K-500R0%1</b>	Measuring resistor
	<b>KF-ST-5GN</b>	Terminal block for KF modules, 3-pin screw terminal, green
	<b>KF-ST-5BU</b>	Terminal block for KF modules, 3-pin screw terminal, blue
	<b>KF-CP</b>	Red coding pins, packaging unit: 20 x 6

## Characteristic Curve

### Maximum Switching Power of Output Contacts

