

AS-Interface sensor/actuator module

VBA-2E1A-G10-ZAL/E2L-1M-V1-Y




- Ultra-compact enclosure
- Gold-plated and machined contacts
- One piece housing
- Degree of protection IP68 / IP69K
- Direct connection via cable outlet

G10 ultra compact module 2 inputs and 1 output



Dimensions

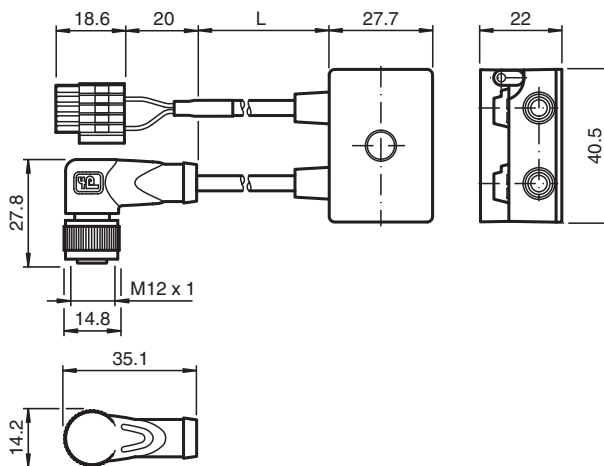

Technical Data

General specifications		
Node type		A/B node
AS-Interface specification		V3.0
Required gateway specification		≥ V2.1
Indicators/operating means		
LED FAULT		error display; LED red red: communication error or address is 0 red flashing: overload of sensor power supply or overload of outputs or external auxiliary voltage U _{AUX} missing
LED AS-i		AS-Interface voltage; LED green
LED IN		switching state (input); 2 LED yellow
LED OUT		Switching state (output); LED yellow
Electrical specifications		
Auxiliary voltage	U _{AUX}	20 ... 30 V DC PELV
Rated operating voltage	U _e	18.5 ... 31.6 V from AS-Interface
Rated operating current	I _e	≤ 40 mA
Protection class		III
Surge protection		U _{AUX} , U _{in} : Over voltage category III, safe isolated power supplies (PELV)
Input		

Release date: 2022-04-13 Date of issue: 2022-04-13 Filename: 267681_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data


Number/Type	2 inputs for 2- or 3-wire sensors (PNP), DC
Supply	from external auxiliary voltage U_{AUX}
Voltage	20 ... 30 V
Current loading capacity	≤ 1000 mA overload and short-circuit resistant
Input current	≤ 9 mA (limited internally)
Switching point	according to DIN EN 61131-2 (Type 2)
0 (unattenuated)	≤ 3 mA
1 (attenuated)	≥ 5 mA
Signal delay	< 1 ms (input/AS-Interface)
Output	
Number/Type	1 electronic output, PNP,
Supply	from external auxiliary voltage U_{AUX}
Voltage	$\geq (U_{AUX} - 0.5 \text{ V})$
Current loading capacity	≤ 1000 mA overload and short-circuit resistant
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 62026-2:2013
Standard conformity	
Degree of protection	EN 60529:2000
Fieldbus standard	EN 62026-2:2013
Input	EN 61131-2:2007
Emitted interference	EN 61000-6-4:2007/A1:2011
AS-Interface	EN 62026-2:2013
Noise immunity	EN 61000-6-2:2005, EN 61326-1:2006, EN 62026-2:2013
Programming instructions	
Profile	S-7.A.E
IO code	7
ID code	A
ID1 code	7
ID2 code	E
Data bits (function via AS-Interface)	InputOutput
D0	IN1 O1
D1	IN2 -
D2	- -
D3	- -
Parameter bits (programmable via AS-i)	function
P0	communication monitoring P0 = 1 (default settings), monitoring = ON, i.e. if communication fails, the outputs are de-energised P0 = 0, monitoring = OFF, if communication fails, the outputs maintain their condition
P1	Input filter P1 = 0 input filter on, pulse suppression ≤ 2 ms P1 = 1 input filter off (default settings)
P2	Synchronous mode P2 = 0 synchronous mode on P2 = 1 synchronous mode off (default settings)
P3	not used
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)
Shock and impact resistance	30 g, 11 ms in 6 spatial directions 3 shocks 10 g, 16 ms in 6 spatial directions 1000 shocks
Vibration resistance	0.75 mm 10 ... 57 Hz, 5 g 57 ... 150 Hz, 20 cycles
Mechanical specifications	
Degree of protection	housing: IP67 IP67 / IP68 / IP69K with flat cable VAZ-FK-S- M12 socket: IP69K

Release date: 2022-04-13 Date of issue: 2022-04-13 Filename: 267681_eng.pdf

Technical Data

Connection	AS-Interface/U _{AUX} : AS-Interface flat cable Inputs/outputs: M12 round connector, 4-pin, A-coded, according to IEC 61076-2-101:2012 WAGO terminal type 733-105	
Material		
Contacts	M12: CuSn/Au WAGO terminal: CrNi	
Housing		PBT PC
Body		PUR, black
Cable		PUR
Mounting screw		Stainless steel 1.4305 / AISI 303
Cable		
Sheath diameter		Ø4,3 mm
Color		black
Cores		0.34 mm ²
Length	L	1 m
Mass		100 g
Tightening torque, fastening screws		1.65 Nm
Tightening torque, cable gland		0.4 Nm


Connection

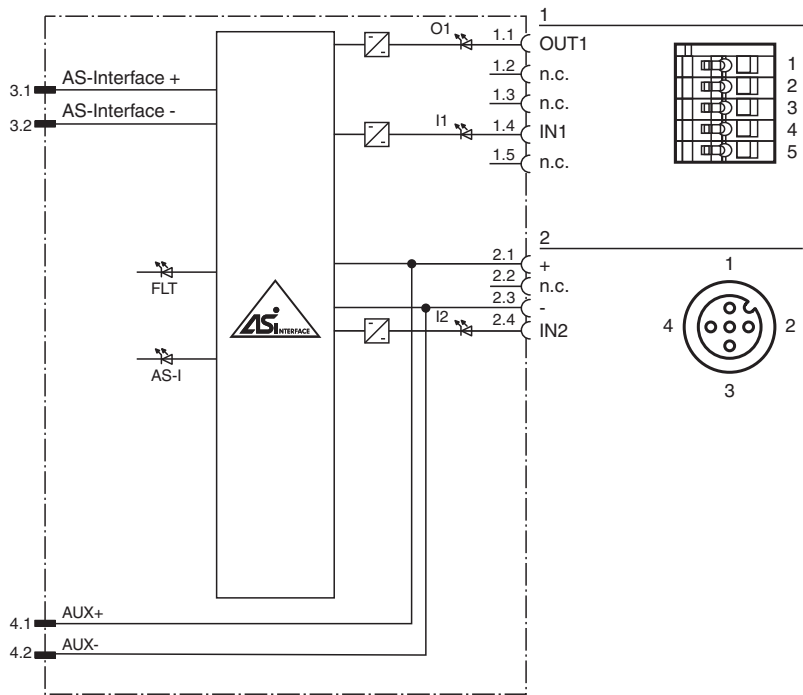


Connection

Do not connect inputs and outputs, which are supplied via the module from AS-interface or via auxiliary power, with power supply and signal circuits with external potentials.

Assembly

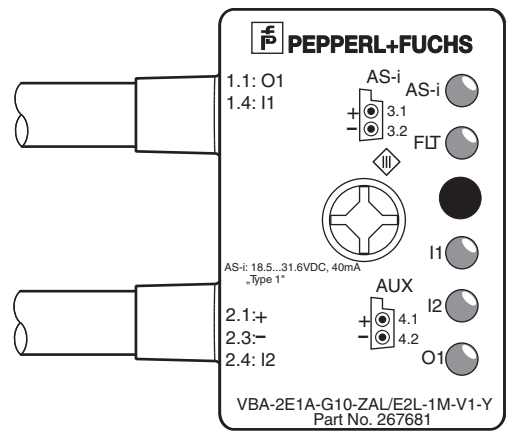

Mounting

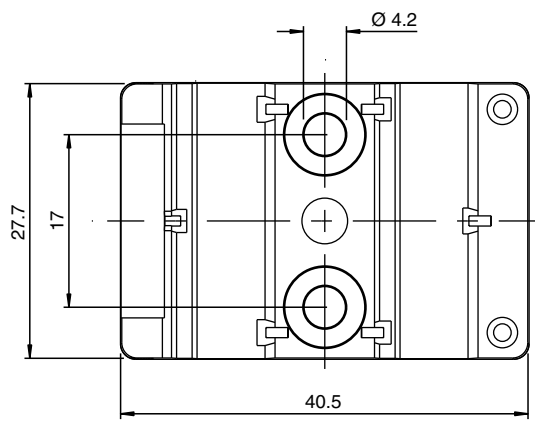

You may screw the device onto a level mounting surface using two M4 attachment screws. The attachment screws are not included.

Accessories

	VAZ-PK-FK-0,2M-V1-W	Adapter cable G10 module/hand-held programming device
---	----------------------------	---

Release date: 2022-04-13 Date of issue: 2022-04-13 Filename: 267681_eng.pdf