



## Digital Output with Shutdown Input FB6216E3


- 2-channel
- Outputs Ex ia
- Installation in suitable enclosures in Zone 1
- Module can be exchanged under voltage (hot swap)
- Line fault detection (LFD)
- Positive or negative logic selectable
- Simulation mode for service operations (forcing)
- Permanently self-monitoring
- Output with watchdog
- Output with bus-independent safety shutdown input

CE  **SIL 2**

### Function

The digital output features 2 independent channels.  
The device can be used to drive solenoids, sounders, or LEDs.  
Open and short circuit line faults are detected.  
The outputs are galvanically isolated from the bus and the power supply.  
The output can be switched off via a contact. This can be used for bus-independent safety applications.

### Connection Assignment

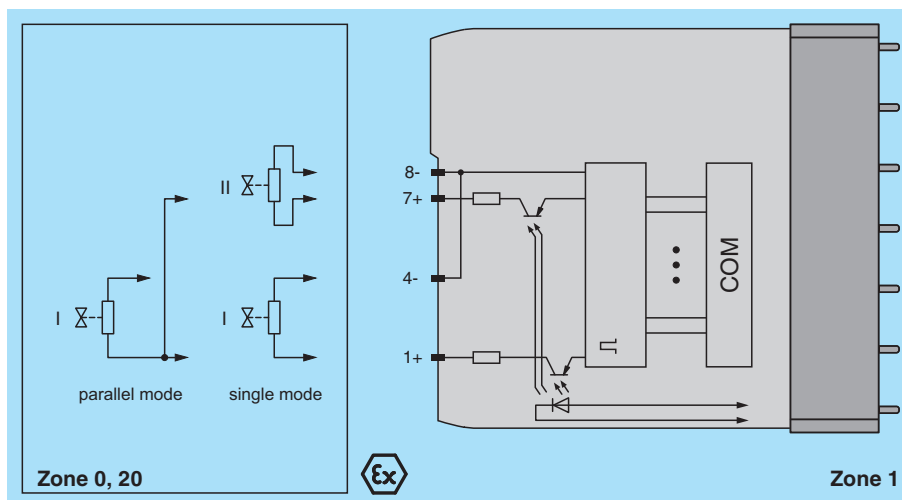

### Technical Data

<b>Supply</b>		
Connection		backplane bus / booster terminals
Rated voltage	$U_r$	12 V DC , only in connection with the power supplies FB92**
Power dissipation		1.95 W
Power consumption		2.9 W
<b>Internal bus</b>		
Connection		backplane bus
Interface		manufacturer-specific bus to standard com unit
<b>Digital output</b>		
Number of channels		2
Suitable field devices		

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0002  
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222  
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

## Technical Data

Field device		Solenoid Valve
Field device [2]		audible alarm
Field device [3]		visual alarm
Connection		channel I: 1+, 4/5/6/8-; channel II: 7+, 4/5/6/8-
Internal resistor	$R_i$	258 $\Omega$ , both channels parallel 129 $\Omega$
Current limit	$I_{max}$	40 mA both channels parallel 80 mA
Open loop voltage	$U_s$	23 V , both channels parallel 23 V
Line fault detection		can be switched on/off for each channel via configuration tool also when turned off (every 2.5 s the valve is turned on for 2 ms)
Short-circuit		< 50 $\Omega$
Open-circuit		> 10 k $\Omega$
Response time		10 ms (depending on bus cycle time)
Watchdog		within 0.5 s the device goes in safe state, e.g. after loss of communication
<b>Indicators/settings</b>		
LED indication		Power LED (P) green: supply Diagnostic LED (I) red: module fault , red flashing: communication error , white: fixed parameter set (parameters from com unit are ignored) , white flashing: requests parameters from com unit Status LED (1, 2) red: line fault (lead breakage or short circuit) , yellow: state of digital I/O (0/1) Mode LED (M) white: Parallel operation of outputs
Coding		optional mechanical coding via front socket
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
<b>Conformity</b>		
Electromagnetic compatibility		NE 21
Degree of protection		IEC 60529
Environmental test		EN 60068-2-14
Shock resistance		EN 60068-2-27
Vibration resistance		EN 60068-2-6
Damaging gas		EN 60068-2-42
Relative humidity		EN 60068-2-78
<b>Ambient conditions</b>		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		95 % non-condensing
Shock resistance		shock type I, shock duration 11 ms, shock amplitude 15 g, number of shocks 18
Vibration resistance		frequency range 10 ... 150 Hz; transition frequency: 57.56 Hz, amplitude/acceleration $\pm 0.075$ mm/1 g; 10 cycles frequency range 5 ... 100 Hz; transition frequency: 13.2 Hz amplitude/acceleration $\pm 1$ mm/0.7 g; 90 minutes at each resonance
Damaging gas		designed for operation in environmental conditions acc. to ISA-S71.04-1985, severity level G3
<b>Mechanical specifications</b>		
Degree of protection		IP20 (module) , a separate housing is required acc. to the system description
Connection		removable front connector with screw flange (accessory) wiring connection via spring terminals (0.14 ... 1.5 mm <sup>2</sup> ) or screw terminals (0.08 ... 1.5 mm <sup>2</sup> )
Mass		approx. 425 g
Dimensions		28 x 107 x 132 mm (1.1 x 4.2 x 5.2 inch)
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate		Presafe 19 ATEX 14054U
Marking		Ⓔ II 2(1)G Ex db eb q [ia Ga] IIC Gb II (1)D [Ex ia Da] IIIC I (M1) [Ex ia Ma] I
Output		
Voltage	$U_o$	24.2 V
Current	$I_o$	108 mA


Release date: 2025-03-03 Date of issue: 2025-03-03 Filename: 281078\_eng.pdf

Technical Data

Power	P <sub>o</sub>	654 mW
Internal capacitance	C <sub>i</sub>	12 nF
Internal inductance	L <sub>i</sub>	0 mH
Output (both channels parallel)		
Voltage	U <sub>o</sub>	24.2 V
Current	I <sub>o</sub>	216 mA
Power	P <sub>o</sub>	1308 mW
Internal capacitance	C <sub>i</sub>	24 nF
Internal inductance	L <sub>i</sub>	0 mH
Galvanic isolation		
Output/power supply, internal bus	safe electrical isolation acc. to EN 60079-11, voltage peak value 375 V	
Directive conformity		
Directive 2014/34/EU	EN 60079-0:2018+AC:2020 EN 60079-1:2014 EN 60079-5:2015 EN 60079-7:2015+A1:2018 EN 60079-11:2012	
International approvals		
ATEX approval	Presafe 19 ATEX 14054U	
IECEx approval		
IECEx certificate	IECEx PRE 19.0009U	
IECEx marking		Ex db eb q [ia Ga] IIC Gb [Ex ia Da] IIC [Ex ia Ma] I
General information		
System information		The module has to be mounted in appropriate backplanes and housings (FB92**) in Zone 1, 2, 21, 22 or outside hazardous areas (gas or dust). Here, observe the corresponding EC-type examination certificate.
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .	

Assembly


Front view

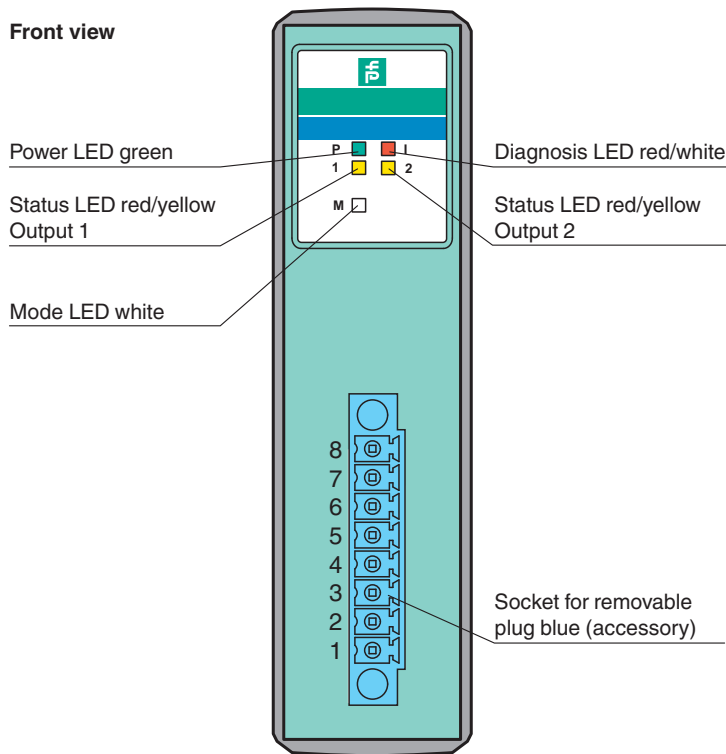

Release date: 2025-03-03 Date of issue: 2025-03-03 Filename: 281078\_eng.pdf

## Characteristic Curve

Load calculation



$R_{load}$  = Field loop resistance

$$U_e = U_s - R_i \times I_e$$

$$I_e = U_s / (R_i + R_{load})$$

Output characteristics

