



Thermocouple Converter KFD0-TT-Ex1


- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Thermocouple input
- Output 4 mA ... 20 mA
- Internal cold junction compensation
- Sensor breakage detection
- DIP switch selectable ranges



Function

This isolated barrier is used for intrinsic safety applications. It is a loop-powered isolator that converts thermocouple inputs in the hazardous area to a 4 mA ... 20mA signal in the safe area. The internal cold junction compensation can be bypassed by using terminals 1 and 3. The output current is linear to input voltage, not proportional to temperature. Zero, span, and burnout detection are field-configurable.

Connection

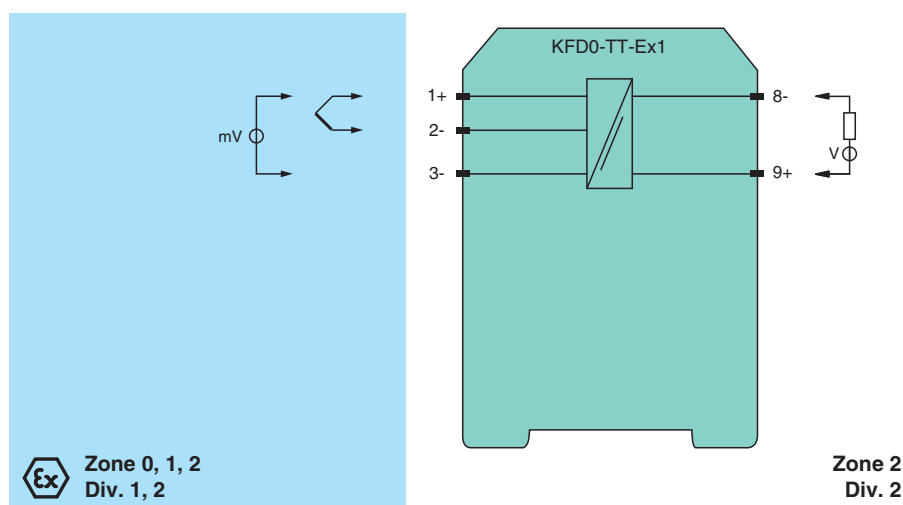

Technical Data

General specifications

Signal type		Analog input
Supply		
Rated voltage	U _r	12 ... 35 V DC loop powered
Power dissipation		0.4 W
Input		
Connection side		field side
Connection		terminals 1+, 2-, 3- thermocouple E, J, K, N, R, S or T, cold junction referenced to 0 °C (32 °F)
Lead resistance		max. 100 Ω per line
Current		lead monitoring ON: ≤ 15 nA; OFF: ≤ 1 nA
Output		

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 043692_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data


Connection side		control side
Connection		terminals 9+, 8-
Load		(U -12 V) / 0.02 A
Current output		4 ... 20 mA , limited to ≤ 35 mA
Fault signal		downscaling ≤ 3 mA , upscaling ≥ 22 mA
Transfer characteristics		
Measurement range	f_n	span 4 ... 100 mV, zero point -12 ... 60 mV , both adjustable
Deviation		
After calibration		0.1 % of full-scale value ± 1 K for the cold junction
Temperature effect		temperature deviation 0.015 % of the span/K or 1.5 µV/K cold junction ± 2 K (calibrated at $T_{amb} = 20\text{ °C}$ (68 °F))
Influence of supply voltage		6.5 ppm/V
Characteristic curve		the output voltage is linearly proportionate to the input voltage (not to temperature)
Rise time		250 ms
Galvanic isolation		
Input/Output		safe isolation according to EN 50178, rated insulation voltage 253 V _{eff}
Indicators/settings		
Control elements		DIP switch rotary switch
Configuration		via DIP switches via rotary switch
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Insulation coordination		EN 50178
Galvanic isolation		EN 50178
Degree of protection		IEC 60529
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		ZELM 00 ATEX 0035
Marking		Ⓔ II (1)GD [Ex ia] IIC
Voltage	U_o	16.1 V
Current	I_o	0.8 mA
Power	P_o	3.2 mW
Output		
Maximum safe voltage	U_m	60 V (Attention! The rated voltage can be lower.)
Certificate		TÜV 01 ATEX 1777 X
Marking		Ⓔ II 3G Ex nA II T4
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
CSA approval		
Control drawing		116-0132

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 043692_eng.pdf

Technical Data

General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

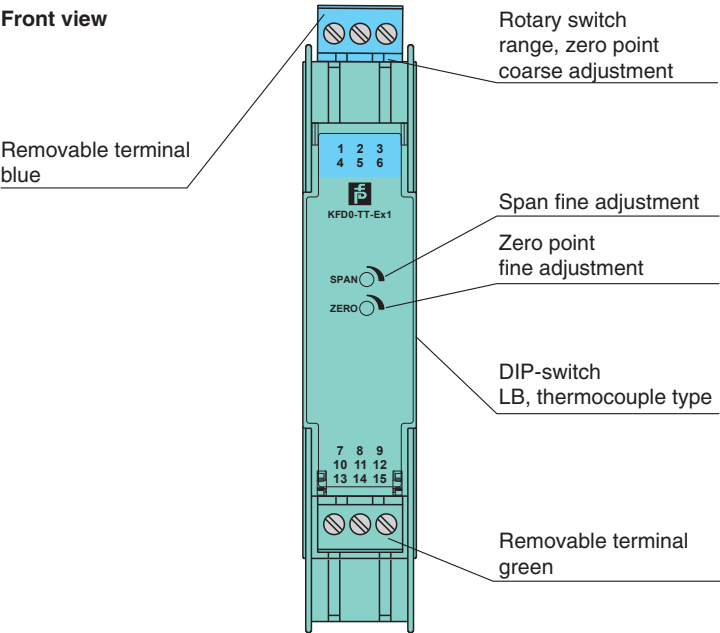

Matching System Components

	K-DUCT-BU	Profile rail, wiring comb field side, blue
---	------------------	--


Accessories

	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 043692_eng.pdf

Configuration

DIP switches function

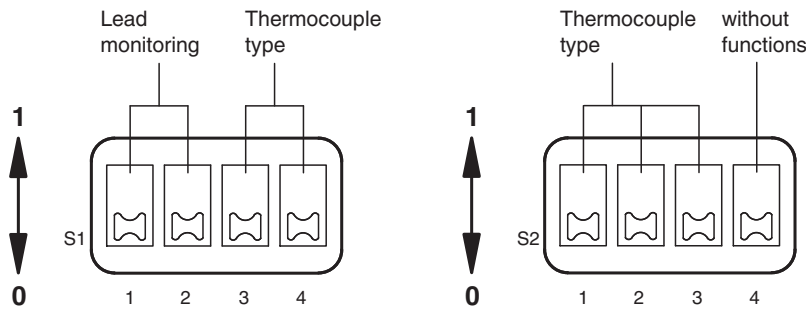


Switch	Position	Function
S1.1/S1.2	1/0	LB UP-upscaled
S1.1/S1.2	0/1	LB DOWN-downscaled
S1.3	1	Thermocouple type E
S1.4	1	Thermocouple type J
S2.1	1	Thermocouple type K, T
S2.2	1	Thermocouple type N
S2.3	1	Thermocouple type R, S

* other combinations not allowed/defined

Note: A new adjustment is necessary in the case of modified configuration (e. g. LB from upscaled to downscaled).

Rotary switches function



Please consider that the values of the Zero-table are only valid for the span range Pos. 0 and that both tables contain typical values, which can be used as an adjustment help.

Switch SPAN coarse adjustment	Span (mV)	Switch ZERO coarse adjustment	Zero point (mV) for max. span (potentiometer right-hand stop)	Zero point (mV) for min. span (potentiometer left-hand stop)
0	100.0 ... 53.0	0	-12.0 ... -8.0	-13.6 ... -8.5
1	55.0 ... 30.0	1	-8.3 ... -3.7	-9.0 ... -4.0
2	32.0 ... 20.0	2	-4.0 ... 1.0	-4.3 ... 1.1
3	22.0 ... 5.0	3	0.5 ... 5.6	0.5 ... 6.1
4	17.0 ... 12.0	4	4.6 ... 10.2	5.2 ... 11.2
5	14.0 ... 11.0	5	9.3 ... 14.9	10.2 ... 16.2
6	13.0 ... 9.0	6	13.9 ... 19.5	15.2 ... 21.1
7	11.0 ... 8.0	7	18.3 ... 23.9	20.1 ... 25.6
8	10.0 ... 7.0	8	23.0 ... 28.6	24.7 ... 31.0
9	9.0 ... 6.0	9	27.6 ... 33.1	30.0 ... 36.0
A	8.0 ... 5.5	A	32.1 ... 37.6	35.0 ... 40.5
B	7.5 ... 5.0	B	36.6 ... 42.1	39.4 ... 46.0
C	7.0 ... 4.5	C	41.1 ... 46.6	45.1 ... 51.0
D	6.5 ... 4.2	D	45.5 ... 51.0	50.1 ... 56.0
E	6.2 ... 4.1	E	50.0 ... 55.5	55.0 ... 61.0
F	6.1 ... 4.0	F	54.4 ... 60.0	60.0 ... 62.0

Recommendation for adjustment:

1. Span determination (in mV).
2. "Span coarse adjustment" in accordance with the table.
3. Minimum value adjustment (in mV or °C) at the input.
4. "Zero point coarse adjustment", to approach to 4 mA.
5. "Zero point fine adjustment" to exactly 4 mA.
6. Maximum value adjustment (in mV or °C) at the input.
7. "Span fine adjustment" to exactly 20 mA.
8. If necessary repeat fine adjustment for 4 mA and 20 mA.

Release date: 2021-11-25 Date of issue: 2021-11-25 Filename: 043692_eng.pdf