


Termination Board

HiCTB16-TRX-RAC-PL-DI32




- System board for Schneider Electric, Tricon CX series by Triconex
- For 32-channel DI card 3506X
- For 16 modules
- 24 V DC supply
- Recommended modules: HiC2822 (DI), HiC2842 (DI)
- Hazardous area: pluggable screw terminals, blue
- Non-hazardous area: ELCO socket, 56-pin

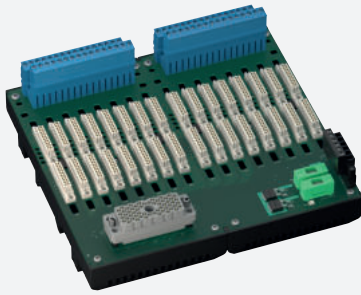

Function

The function of the termination board and the system connector pin assignment is exactly fitted to the requirements of the Triconex Tricon CX system.
The signal is output to the safety instrumented system via the system connector.
Information about missing supply voltage of the isolated barriers is available for the system at the volt-free transistor output.
Wiring faults from the field side will be reported via the volt-free transistor output, if this function is supported by the isolators.
The termination board has a robust glass fiber reinforced plastic housing.
The termination board is mounted in the switch cabinet on a 35 mm DIN mounting rail according to EN 60175.

Connection

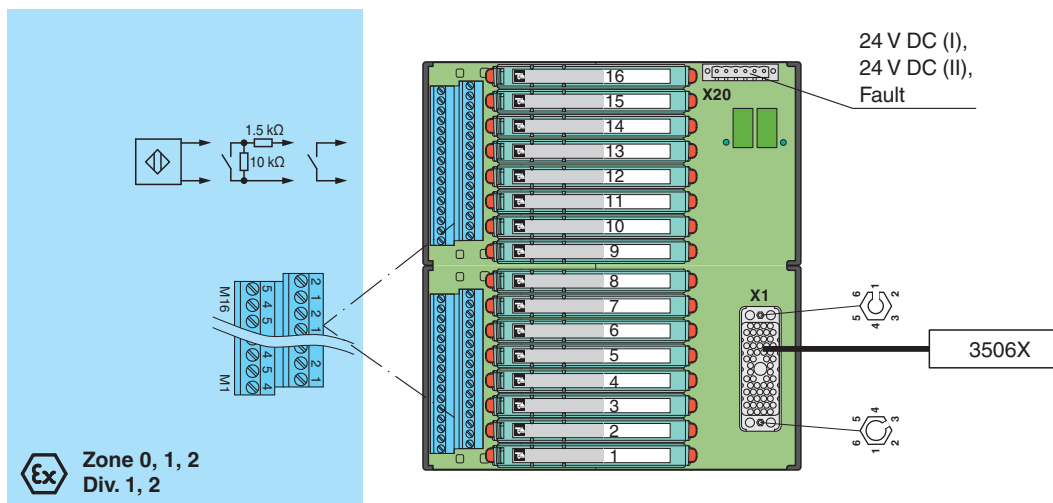

Ex Zone 0, 1, 2
Div. 1, 2

Technical Data

Supply

| | |
|-----------------------------|--|
| Connection | X20: terminals 3, 5(+); 4, 6(-) |
| Nominal voltage | 24 V DC , in consideration of rated voltage of used isolators |
| Voltage drop | 0.9 V , voltage drop across the series diode on the termination board must be considered |
| Ripple | ≤ 10 % |
| Fusing | 4 A , in each case for 16 modules |
| Power dissipation | ≤ 500 mW , without modules |
| Reverse polarity protection | yes |

Redundancy

| | |
|--------|---|
| Supply | Redundancy available. The supply for the isolators is decoupled, monitored and fused. |
|--------|---|

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

| | | |
|--|-------|---|
| Fault indication output | | |
| Connection | | X20: terminals 1(+), 2(-) |
| Output type | | volt-free transistor output , not short-circuit protected , not overload protected |
| Rated voltage | U_r | 30 V DC |
| Rated current | I_r | 100 mA |
| Signal level | | no fault: (external voltage) - 1 V max. for 100 mA ($T_{amb} = 25\text{ °C}$ (77 °F)) power supply fault/module fault: blocked output (off-state current $\leq 10\text{ }\mu\text{A}$) |
| Indicators/settings | | |
| Display elements | | LED PWR1 (termination board power supply), green LED LED PWR2 (termination board power supply), green LED |
| Directive conformity | | |
| Electromagnetic compatibility | | |
| Directive 2014/30/EU | | EN 61326-1:2013 (industrial locations) |
| Conformity | | |
| Electromagnetic compatibility | | NE 21:2017 For further information see system description. |
| Degree of protection | | IEC 60529:2001 |
| Ambient conditions | | |
| Ambient temperature | | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | | -40 ... 85 °C (-40 ... 185 °F) |
| Mechanical specifications | | |
| Degree of protection | | IP20 |
| Connection | | |
| Field side | | explosion hazardous area: pluggable screw terminals , blue |
| Control side | | non-explosion hazardous area: ELCO socket, 56-pin |
| Supply | | pluggable screw terminals , black |
| Fault output | | pluggable screw terminals , black |
| Core cross section | | screw terminals 0.25 ... 2.5 mm ² (24 ... 12 AWG) |
| Material | | housing: polycarbonate, 10 % glass fiber reinforced |
| Mass | | approx. 765 g |
| Dimensions | | 216 x 200 x 163 mm (8.5 x 7.9 x 6.42 inch) (W x H x D) , depth including module assembly |
| Mounting | | on 35 mm DIN mounting rail acc. to EN 60715:2001 |
| Data for application in connection with hazardous areas | | |
| EU-type examination certificate | | CESI 06 ATEX 022 |
| Marking | | Ⓔ II (1)G [Ex ia Ga] IIC Ⓔ II (1)D [Ex ia Da] IIIC Ⓔ I (M1) [Ex ia Ma] I |
| Non-hazardous area | | |
| Maximum safe voltage | | 250 V (Attention! U_m is no rated voltage.) |
| Galvanic isolation | | |
| Field circuit/control circuit | | safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V |
| Directive conformity | | |
| Directive 2014/34/EU | | EN IEC 60079-0:2018+AC:2020 , EN 60079-11:2012 , EN 50303:2000 |
| International approvals | | |
| UL approval | | E106378 |
| Control drawing | | 116-0327 |
| IECEx approval | | |
| IECEx certificate | | IECEx CES 06.0003 |
| IECEx marking | | [Ex ia Ga] IIC [Ex ia Da] IIIC [Ex ia Ma] I |
| General information | | |
| Supplementary information | | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com . |

Release date: 2023-10-23 Date of issue: 2023-10-23 Filename: 70127426_eng.pdf


Accessories

| | | |
|---|----------------------------|--|
|  | HiALC-HICTB-SET-108 | Label carrier for HiC termination boards |
|---|----------------------------|--|

Release date: 2023-10-23 Date of issue: 2023-10-23 Filename: 70127426_eng.pdf

Application

Typical circuit

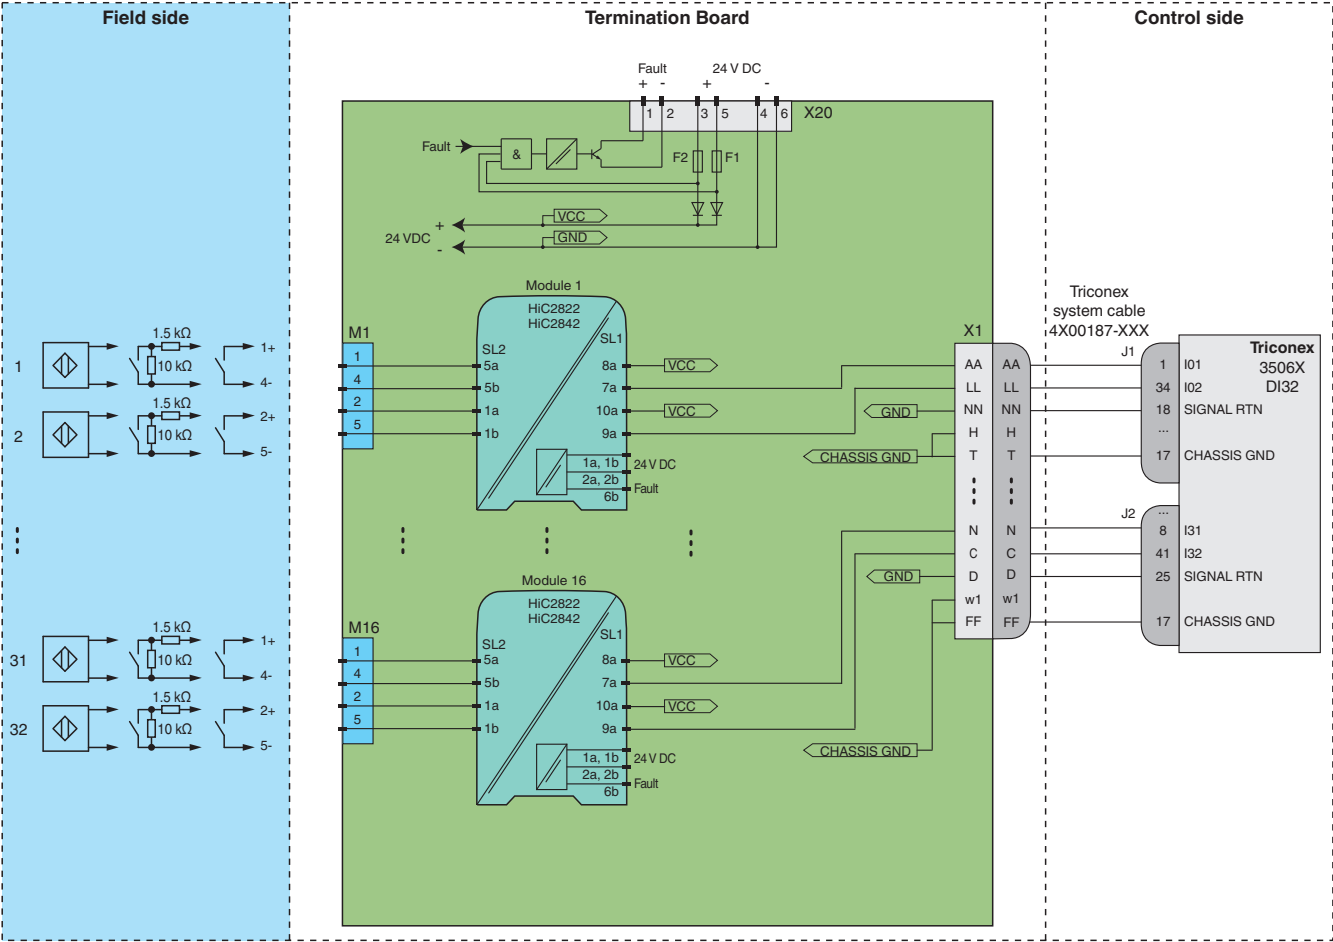

Module switch settings

| Type (DI) | DIP switch | Position |
|--|------------|----------|
| HiC2822 (DI), HiC2842 (DI) | S1 | I |
| • Mode of operation: open – energized close – de-energized | S2 | I |
| • Input line fault detection: enabled | S3 | I |
| | S4 | I |



For exact pin assignment for field side and control side see the documentation of the isolated barrier.



The pin-out configuration has to be observed. For information see corresponding pin-out table on www.pepperl-fuchs.com.