



# WF120-95B41CA00

WF

**FORK SENSORS**

**SICK**  
Sensor Intelligence.



Illustration may differ



Ordering information

| Type            | part no. |
|-----------------|----------|
| WF120-95B41CA00 | 6058614  |

Other models and accessories → [www.sick.com/WF](http://www.sick.com/WF)

Detailed technical data

Features

|                                 |                                                                                                  |
|---------------------------------|--------------------------------------------------------------------------------------------------|
| Functional principle            | Optical detection principle                                                                      |
| Dimensions (W x H x D)          | 10 mm x 150 mm x 110 mm                                                                          |
| Fork width                      | 120 mm                                                                                           |
| Fork depth                      | 95 mm                                                                                            |
| Minimum detectable object (MDO) | 0.2 mm                                                                                           |
| Label detection                 | ✓                                                                                                |
| Light source                    | LED, infrared, Infrared light                                                                    |
| Adjustment                      | Teach-in button, cable (Teach-in, sensitivity, light/dark switching, key lock, Teach-in dynamic) |
| Teach-in mode                   | 1-point teach-in<br>2-point teach-in<br>Teach-in dynamic                                         |
| Output function                 | Light/darkswitching, selectable via button                                                       |

Mechanics/electronics

|                     |                     |
|---------------------|---------------------|
| Supply voltage      | 10 V DC ... 30 V DC |
| Ripple              | < 10 %              |
| Current consumption | 20 mA <sup>1)</sup> |
| Switching frequency | 15 kHz              |

<sup>1)</sup> Without load.  
<sup>2)</sup> Signal transit time with resistive load.  
<sup>3)</sup> Reference voltage DC 50 V.  
<sup>4)</sup> Depending on fork width.

|                                                   |                                                                                                                           |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <b>Response time</b>                              | $\leq 46 \mu\text{s}$ <sup>2)</sup>                                                                                       |
| <b>Stability of response time</b>                 | $\pm 20 \mu\text{s}$                                                                                                      |
| <b>Jitter</b>                                     | 17 $\mu\text{s}$                                                                                                          |
| <b>Switching output</b>                           | Push-pull: PNP/NPN                                                                                                        |
| <b>Switching output (voltage)</b>                 | Push-pull: PNP/NPN High = $U_V - < 2 \text{ V}$ / Low: $\leq 2 \text{ V}$                                                 |
| <b>Switching mode</b>                             | Light/dark switching                                                                                                      |
| <b>Output current <math>I_{\text{max}}</math></b> | 100 mA                                                                                                                    |
| <b>Input, teach-in (ET)</b>                       | Teach: $U > 5 \text{ V} \dots < U_V$<br>Run: $U < 4 \text{ V}$                                                            |
| <b>Initialization time</b>                        | 40 ms                                                                                                                     |
| <b>Time delay</b>                                 | Switch-off delay, 0 ms / 8 ms / 16 ms / 32 ms / 65 ms / 130 ms / 260 ms / 520 ms, adjustable via IO-Link (0 ms = default) |
| <b>Connection type</b>                            | Male connector M8, 4-pin                                                                                                  |
| <b>Protection class</b>                           | III <sup>3)</sup>                                                                                                         |
| <b>Circuit protection</b>                         | $U_V$ connections, reverse polarity protected<br>Output Q short-circuit protected<br>Interference pulse suppression       |
| <b>Enclosure rating</b>                           | IP65                                                                                                                      |
| <b>Weight</b>                                     | Approx. 36 g ... 160 g <sup>4)</sup>                                                                                      |
| <b>Housing material</b>                           | Aluminum                                                                                                                  |

1) Without load.

2) Signal transit time with resistive load.

3) Reference voltage DC 50 V.

4) Depending on fork width.

## Safety-related parameters

|                         |          |
|-------------------------|----------|
| <b>MTTF<sub>D</sub></b> | 97 years |
| <b>DC<sub>avg</sub></b> | 0 %      |

## Communication interface

|                                 |                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IO-Link</b>                  | ✓ , IO-Link V1.1                                                                                                                         |
| VendorID                        | 26                                                                                                                                       |
| DeviceID HEX                    | 8000AE                                                                                                                                   |
| DeviceID DEC                    | 8388782                                                                                                                                  |
| <b>Cycle time</b>               | 2.3 ms                                                                                                                                   |
| <b>Process data structure A</b> | Bit 0 = switching signal $Q_{L1}$<br>Bit 1 = switching signal $Q_{L2}$<br>Bit 2 = not used<br>Bit 3 = Teach busy<br>Bit 4 ... 15 = empty |
| <b>Process data structure B</b> | Bit 0 = switching signal $Q_{L1}$<br>Bit 1 = Quality of Run Alarm<br>Bit 2 = not used<br>Bit 3 = Teach busy<br>Bit 4 ... 15 = empty      |
| <b>Process data structure C</b> | Bit 0 = switching signal $Q_{L1}$<br>Bit 1 = switching signal $Q_{L2}$<br>Bit 2 = not used<br>Bit 3 = Teach busy                         |

|                                 |                                                                                                                                                                             |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                 | Bit 4 ... 5 = empty<br>Bit 6 ... 15 = measuring value                                                                                                                       |
| <b>Process data structure D</b> | Bit 0 = switching signal Q <sub>L1</sub><br>Bit 1 = Quality of Run Alarm<br>Bit 2 = not used<br>Bit 3 = Teach busy<br>Bit 4 ... 5 = empty<br>Bit 6 ... 15 = measuring value |

### Ambient data

|                                      |                                 |
|--------------------------------------|---------------------------------|
| <b>Ambient operating temperature</b> | -20 °C ... +60 °C <sup>1)</sup> |
| <b>Ambient temperature, storage</b>  | -30 °C ... +80 °C               |
| <b>Ambient light immunity</b>        | ≤ 10,000 lx                     |
| <b>Shock load</b>                    | According to EN 60068-2-27      |
| <b>UL File No.</b>                   | NRKH.E191603                    |

<sup>1)</sup> Do not bend below 0 °C.

### Smart Task

|                        |             |
|------------------------|-------------|
| <b>Smart Task name</b> | Base logics |
|------------------------|-------------|

### Certificates

|                                              |   |
|----------------------------------------------|---|
| <b>EU declaration of conformity</b>          | ✓ |
| <b>UK declaration of conformity</b>          | ✓ |
| <b>ACMA declaration of conformity</b>        | ✓ |
| <b>Moroccan declaration of conformity</b>    | ✓ |
| <b>China-RoHS</b>                            | ✓ |
| <b>cULus certificate</b>                     | ✓ |
| <b>IO-Link</b>                               | ✓ |
| <b>Photobiological safety (IEC EN 62471)</b> | ✓ |


### Classifications

|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270909 |
| <b>ECLASS 5.1.4</b> | 27270909 |
| <b>ECLASS 6.0</b>   | 27270909 |
| <b>ECLASS 6.2</b>   | 27270909 |
| <b>ECLASS 7.0</b>   | 27270909 |
| <b>ECLASS 8.0</b>   | 27270909 |
| <b>ECLASS 8.1</b>   | 27270909 |
| <b>ECLASS 9.0</b>   | 27270909 |
| <b>ECLASS 10.0</b>  | 27270909 |
| <b>ECLASS 11.0</b>  | 27270909 |
| <b>ECLASS 12.0</b>  | 27270909 |
| <b>ETIM 5.0</b>     | EC002720 |
| <b>ETIM 6.0</b>     | EC002720 |
| <b>ETIM 7.0</b>     | EC002720 |
| <b>ETIM 8.0</b>     | EC002720 |

UNSPSC 16.0901

39121528

## Dimensional drawing

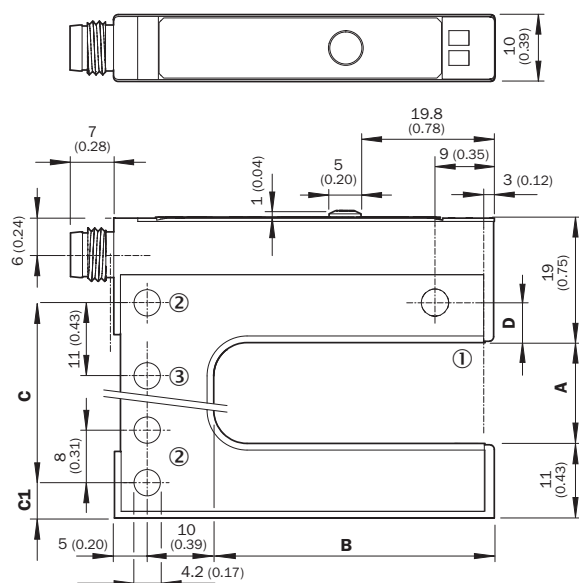


Dimensions in mm (inch)

|       | A                     | B                         | C          | C1         | D          |
|-------|-----------------------|---------------------------|------------|------------|------------|
|       | Gabelweite/Fork width | Gabeltiefe/Fork depth     |            |            |            |
| WF2   | 2 (0.08)              | 42/59/95 (1.65/2.32/3.74) | 14 (0.55)  | 5 (0.20)   | 6 (0.24)   |
| WF5   | 5 (0.20)              | 42/59/95 (1.65/2.32/3.74) | 14 (0.55)  | 6.5 (0.26) | 4.5 (0.17) |
| WF15  | 15 (0.59)             | 42/59/95 (1.65/2.32/3.74) | 27 (1.06)  | 5 (0.20)   | 6 (0.24)   |
| WF30  | 30 (1.18)             | 42/59/95 (1.65/2.32/3.74) | 42 (1.65)  | 5 (0.20)   | 6 (0.24)   |
| WF50  | 50 (1.97)             | 42/59/95 (1.65/2.32/3.74) | 51 (2.01)  | 16 (0.63)  | 6 (0.24)   |
| WF80  | 80 (3.15)             | 42/59/95 (1.65/2.32/3.74) | 81 (3.19)  | 16 (0.63)  | 6 (0.24)   |
| WF120 | 120 (4.72)            | 42/59/95 (1.65/2.32/3.74) | 121 (4.76) | 16 (0.63)  | 6 (0.24)   |


Dimensions in mm (inch)

## Adjustments Adjustment: teach-in via Teach-in button (WFxx-B41Cxx)

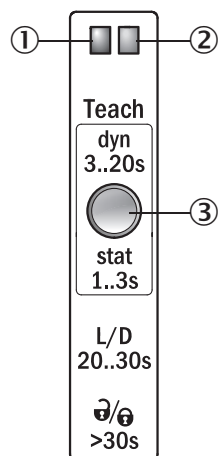


- ① Function signal indicator (yellow), switching output
- ② Function signal indicator (green)
- ③ Teach-in button and function button


## Connection diagram Cd-273



## Concept of operation Teach-in via Teach-in button (WFxx-B41Cxx)

**1. Start teach-in: Position the background or object between the fork**

Press the teach-in button for 3 - 20 s. With the pushbutton pressed down, move several objects with carrier material (label objects to be detected) through the sensor. The yellow LED flashes at 3 Hz during the teach-in procedure. Recommendation: Move at least 3 objects through the sensor.

**2. End teach-in:**

Release the teach-in button for < 20 s. If teach-in is successful, the function indicator (yellow LED) directly indicates the output state of the sensor. The switching threshold is now optimally set between background and object. The best possible operational safety is provided.

**Note****Fine adjustment**

In order to obtain a higher operating reserve, a fine adjustment can be carried out after successful teach-in. For this purpose, the switching threshold is set close to the taught-in object. The teach-in button must be pressed and released within 10 s of successful teach-in. Successful setting is signaled by flashing twice at 1 Hz.

**Light/dark switching**

You can change between light switching and dark switching by pressing the teach-in button for 20 - 30 s.

**Pushbutton lock**

The device can be locked against unintended operation by pressing the teach-in button for > 30 s. The device can be unlocked by pressing the teach-in button again for > 30 s.

## Recommended accessories

Other models and accessories → [www.sick.com/WF](http://www.sick.com/WF)

|                                                                                     | Brief description                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Type                              | part no. |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------|
| connectors and cables                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                   |          |
|    | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, M8, 4-pin, straight, A-coded</li> <li>• <b>Description:</b> Unshielded</li> <li>• <b>Connection systems:</b> Screw-type terminals</li> <li>• <b>Permitted cross-section:</b> 0.14 mm² ... 0.5 mm²</li> </ul>                                                                                                                                                                | STE-0804-G                        | 6037323  |
|    | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M8, 4-pin, straight, A-coded</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 5 m, 4-wire, PVC</li> <li>• <b>Description:</b> Sensor/actuator cable, unshielded</li> <li>• <b>Application:</b> Zones with chemicals, Uncontaminated zones</li> </ul>                                  | YF8U14-050VA3XLEAX                | 2095889  |
|    | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M8, 4-pin, straight, A-coded</li> <li>• <b>Connection type head B:</b> Male connector, M12, 4-pin, straight, A-coded</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 5 m, 4-wire, PVC</li> <li>• <b>Description:</b> Sensor/actuator cable, unshielded</li> <li>• <b>Application:</b> Zones with chemicals, Uncontaminated zones</li> </ul> | YF8U14-050VA3M2A14                | 2096609  |
| network devices                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                   |          |
|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | IOLA2US-01101<br>(SiLink2 Master) | 1061790  |
|    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SIG200-0A0412200                  | 1089794  |
|  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SIG200-0A0G12200                  | 1102605  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)