

Reflex Sensor with Background Suppression

HO08PA

Part Number



- Adjustable switching distance
- Excellent ambient light suppression
- High switching frequency
- Large detection range

Technical Data


Optical Data


Range	80 mm
Adjustable Range	25...80 mm
Switching Hysteresis	see Table 1
Light Source	Red Light
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1

Electrical Data

Supply Voltage	10...30 V DC
Current Consumption (Ub = 24 V)	< 40 mA
Switching Frequency	1 kHz
Response Time	500 µs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Setting Method	Potentiometer
Housing Material	CuZn, nickel-plated
Full Encapsulation	yes
Degree of Protection	IP67
Connection	Cable, 4-wire, 2 m
PNP NO/NC antivalent	●
Connection Diagram No.	201
Control Panel No.	O3
Suitable Mounting Technology No.	170

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance. Also these sensors don't influence each other if their light spots are pointed onto the same spot or against each other.

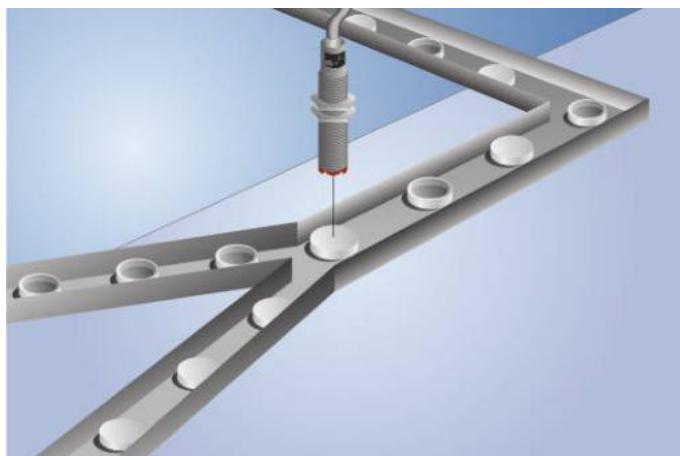


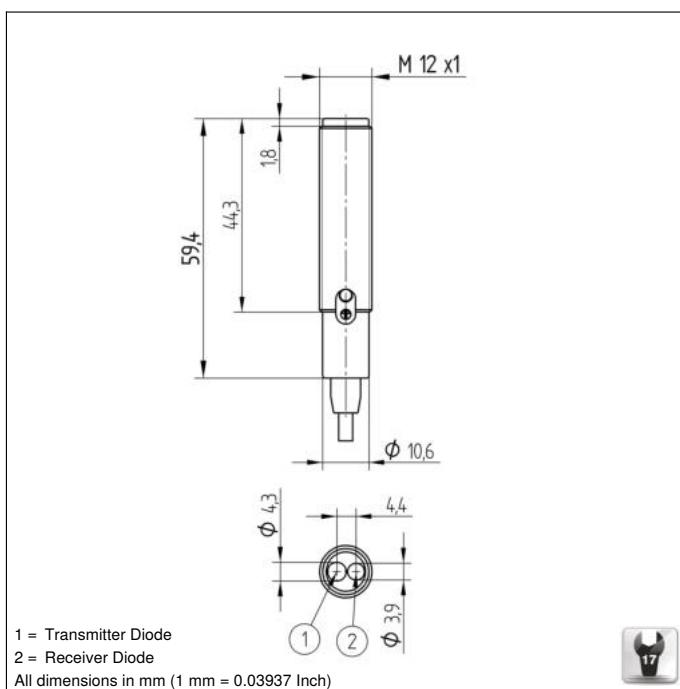

Ctrl. Panel



05 = Switching Distance Adjuster
31 = Switching Status/Contamination-/Short Circuit Warning

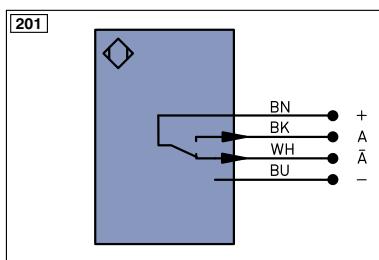

Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	Ü	Test Input inverted
Å	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
Å	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
Z	Time Delay (activation)	Awv	Valve Output
S	Shielding	a	Valve Control Output +
		b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link		Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BLD	Ethernet Gigabit bidirec. data line (A-D)	RES	Input confirmation
EN0RS422	Encoder 0-pulse 0-0 (TTL)	EDM	Contactor Monitoring

Wire Colors according to DIN IEC 757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow


Table 1

Detection Range	40 mm	60 mm	80 mm
Light Spot Diameter	3 mm	5 mm	7 mm
Switching Hysteresis	< 2 mm	< 3 mm	< 8 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

HO08

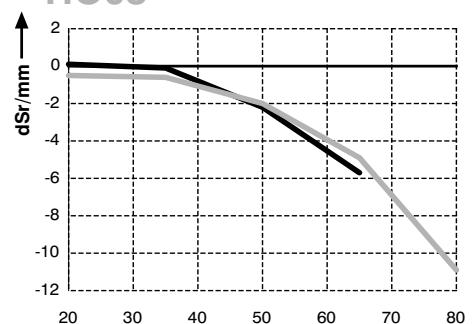

Sr = Switching Distance

dSr = Switching Distance Change

black 6 % remission
grey 18 % remission

