

Reflex Sensor with Background Suppression

HT77PA3

Part Number



- Adjustable time delay
- Infrared light
- Plug can be rotated
- Triple beam correction principle

Technical Data

Optical Data

| | |
|---------------------------|----------------|
| Range | 1500 mm |
| Adjustable Range | 300...1500 mm |
| Switching Hysteresis | < 5 % |
| Light Source | Infrared Light |
| Service Life (T = +25 °C) | 100000 h |
| Risk Group (EN 62471) | 1 |
| Max. Ambient Light | 10000 Lux |
| Light Spot Diameter | see Table 1 |


Electrical Data

| | |
|--|--------------|
| Supply Voltage | 10...30 V DC |
| Current Consumption (Ub = 24 V) | 40 mA |
| Switching Frequency | 300 Hz |
| Response Time | 1700 µs |
| Off-Delay | 0...1 s |
| Temperature Drift | < 5 % |
| Temperature Range | -25...60 °C |
| Switching Output Voltage Drop | < 2,5 V |
| PNP Switching Output/Switching Current | 200 mA |
| Short Circuit Protection | yes |
| Reverse Polarity Protection | yes |
| Overload Protection | yes |
| Protection Class | III |

Mechanical Data


| | |
|-----------------------------------|----------------|
| Setting Method | Potentiometer |
| Housing Material | Plastic |
| Degree of Protection | IP67 |
| Connection | M12 x 1; 4-pin |
| PNP NO/NC antivalent | |
| Connection Diagram No. | 101 |
| Control Panel No. | T1 |
| Suitable Connection Equipment No. | 2 |
| Suitable Mounting Technology No. | 330 |

These sensors detect distance by measuring angles. They are particularly good at recognizing objects in front of any background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

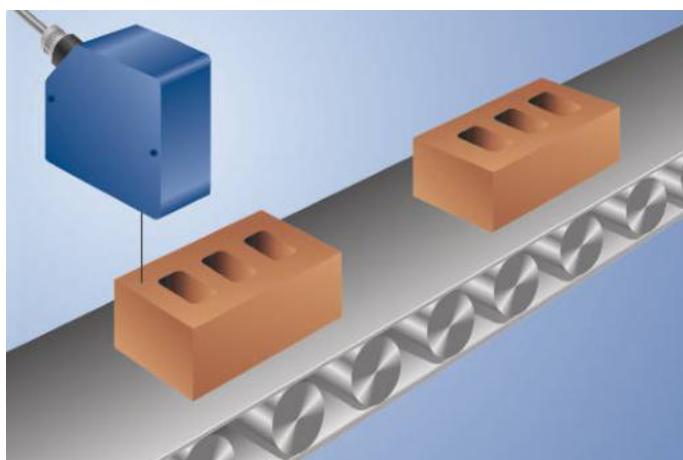


Complementary Products


PNP-NPN Converter BG2V1P-N-2M

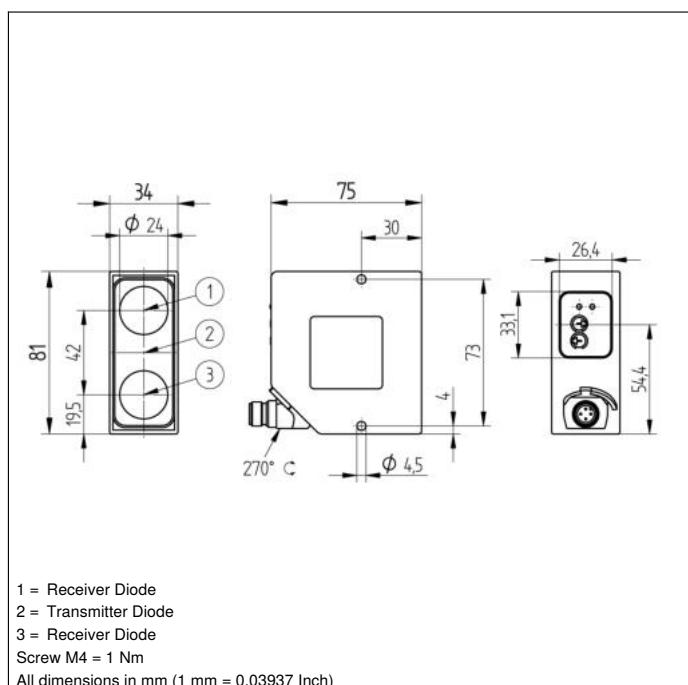

Ctrl. Panel

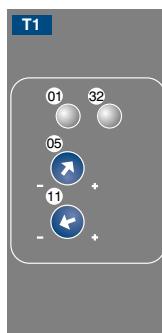

01 = Switching Status Indicator
05 = Switching Distance Adjuster
11 = ON-Delay/OFF-Delay Adjuster
32 = Contamination Warning/Error Warning

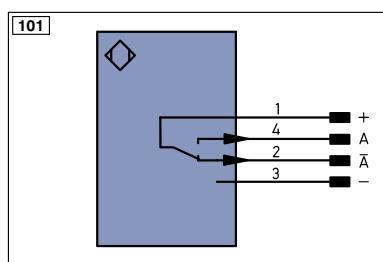

Legend

| | | | |
|----------|--|-------|--------------------------------|
| + | Supply Voltage + | PT | Platinum measuring resistor |
| - | Supply Voltage 0 V | nc | not connected |
| ~ | Supply Voltage (AC Voltage) | U | Test Input |
| A | Switching Output (NO) | Ü | Test Input inverted |
| Ā | Switching Output (NC) | W | Trigger Input |
| V | Contamination/Error Output (NO) | W- | Ground for the Trigger Input |
| V̄ | Contamination/Error Output (NC) | O | Analog Output |
| E | Input (analog or digital) | O- | Ground for the Analog Output |
| T | Teach Input | BZ | Block Discharge |
| Z | Time Delay (activation) | Awv | Valve Output |
| S | Shielding | a | Valve Control Output + |
| RxD | Interface Receive Path | b | Valve Control Output 0 V |
| TxD | Interface Send Path | SY | Synchronization |
| RDY | Ready | SY- | Ground for the Synchronization |
| GND | Ground | E+ | Receiver-Line |
| CL | Clock | S+ | Emitter-Line |
| E/A | Output/Input programmable | ± | Grounding |
| IO-Link | | SnR | Switching Distance Reduction |
| PoE | Power over Ethernet | Rx+/- | Ethernet Receive Path |
| IN | Safety Input | Tx+/- | Ethernet Send Path |
| OSSD | Safety Output | Bus | Interfaces-Bus A(+)/B(-) |
| Signal | Signal Output | La | Emitted Light disengageable |
| B1-D | Ethernet Gigabit bidirect. data line (A-D) | Mag | Magnet activation |
| EN0RS422 | Encoder 0-pulse 0-0 (TTL) | RES | Input confirmation |
| | | EDM | Contactor Monitoring |

EN0RS422 Encoder A/Ā (TTL)
EN0RS422 Encoder B/Ā (TTL)
ENa Encoder A
ENb Encoder B
AMIN Digital output MIN
AMAX Digital output MAX
AOK Digital output OK
SY IN Synchronization IN
SY OUT Synchronization OUT
OLT Brightness output
M Maintenance
rsv reserved

Wire Colors according to DIN IEC 757

| | |
|------|--------------|
| BK | Black |
| BN | Brown |
| RD | Red |
| OG | Orange |
| YE | Yellow |
| GN | Green |
| BU | Blue |
| VT | Violet |
| GY | Grey |
| WH | White |
| PK | Pink |
| GNYE | Green/Yellow |


Table 1

| Detection Range | 300 mm | 800 mm | 1500 mm |
|---------------------|--------|--------|---------|
| Light Spot Diameter | 6 mm | 18 mm | 30 mm |

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

HT77

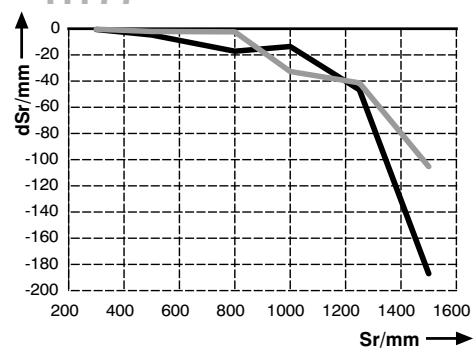

Sr = Switching Distance

dSr = Switching Distance Change

black 6 % remission

grey 18 % remission

