


Double-Ended Cordsets
BCC A315-A315-30-330-PS85N6-006
Order Code: BCC08Z5

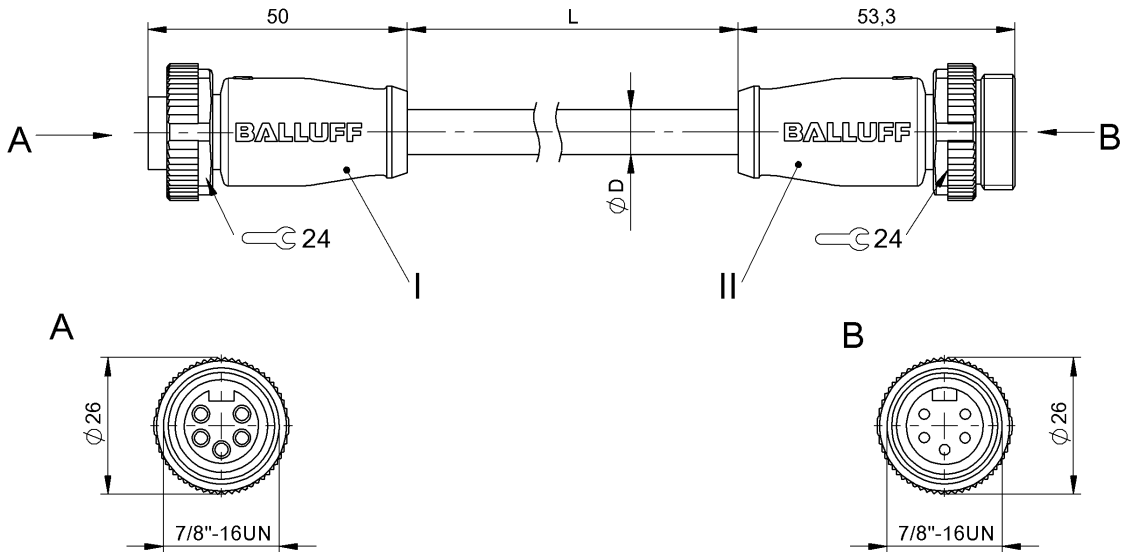

Basic features

Application	DeviceNet Thin
Approval/Conformity	CE cULus WEEE

Electrical connection

Bending radius min., flexible cable	10 x D
Cable	PUR Shielded gray, 0.6 m, drag chain compatible
Cable diameter D	7.60 mm ±0.25 mm
Cable, bending cycles min.	1 mil.
Conductor cross-section	22 AWG/24 AWG
Connection 1	7/8"-Female, straight, 5-pin
Connection 2	7/8"-Male, straight, 5-pin
Number of conductors	4
System	Molded/Molded

Electrical data

Cable rated voltage AC max.	300 V
Cable rated voltage DC max.	300 V
Conductor construction	2x2 twisted-pair
Operating voltage Ub	300 VDC / 300 VAC
Rated current (40 °C)	4.0 A
Surge impedance	120 Ohm ±12 Ohm

Remarks

Bulk cable approval per UL-AWM 20626 or CSA AWM I/II A/B 80°C 300V FT1
Enclosure rating per IEC 60529 or 20653, only in screwed state with the associated mating piece.

Environmental conditions

IP rating	IP67, IP68/IP67, IP68
-----------	-----------------------


Material

Cable jacket material, note	Shielded
Cable jacket, material	PUR
Cable shield	Aluminum foil and copper braid
Material contact carrier	PUR/PUR
Material contacts	Brass/Brass
Material cover nut	Die-cast zinc/Die-cast zinc
Material grip	PUR/PUR


Mechanical data

Cable jacket, color	gray
Cable length L	0.60 m
Cable properties	drag chain compatible
Tightening torque pigtail	1.5 Nm/1.5 Nm

Connector Drawings




DeviceNet Output
PIN 1: shield
PIN 2: +24V
PIN 3: 0V
PIN 4: CAN H
PIN 5: CAN L



DeviceNet Input
PIN 1: shield
PIN 2: +24V
PIN 3: 0V
PIN 4: CAN H
PIN 5: CAN L

Wiring Diagrams

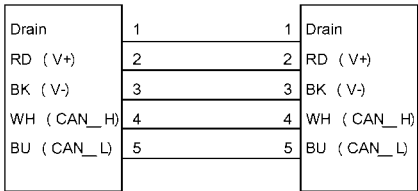

L