

Retro-Reflex Sensor for Transparent Objects

OPT1009

Part Number




- External teach-in
- Recognition of clear glass
- Red light
- Single-lens optic
- Stainless steel plug (V2A)

Technical Data

Optical Data	
Range	4000 mm
Reference Reflector/Reflector Foil	3 × RQ100BA
Clear Glass Recognition	yes
Switching Hysteresis	< 15 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Single-Lens Optic	yes
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 70 mA
Switching Frequency	400 Hz
Response Time	1,25 ms
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Mechanical Data	
Setting Method	Input
Housing Material	Plastic
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4/5-pin
PNP NO	●
Connection Diagram No.	150
Control Panel No.	A37
Suitable Connection Equipment No.	2


A reflector is required for the operation of retro-reflex sensors. Ten sensors are accommodated in a single housing and are OR-linked to each other. The output is switched as soon as any of the light beams is interrupted, making it possible to monitor a broader field. Even crystal-clear objects, films and sheet products are reliably detected.

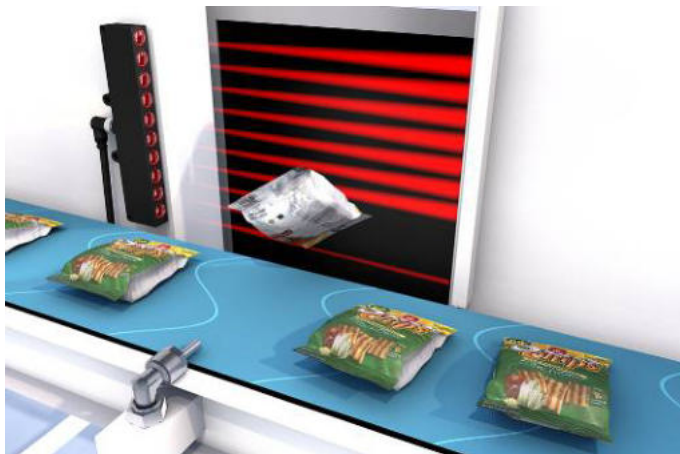



Complementary Products

PNP-NPN Converter BG2V1P-N-2M
Reflector, Reflector Foil

Ctrl. Panel



01 = Switching Status Indicator
68 = supply voltage indicator

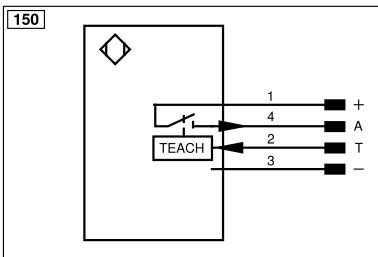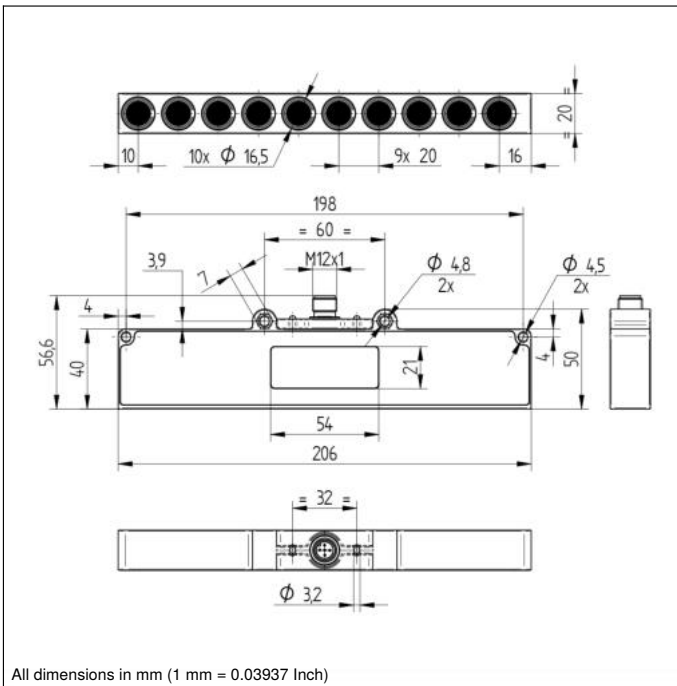

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ů	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link		Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring
PT	Platinum measuring resistor	ENARs422	Encoder A/Ā (TTL)
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Feasible reflector distance

Reflector type, mounting distance

RQ100BA	0...4 m	ZRME03B01	0...1 m
RE6151BM	0...3 m	RF505	0...0,8 m
RE6040BA	0...3,7 m	ZRAF08K01	0...0,8 m
Z90R006	0...1,4 m	ZRDF10K01	0...1,5 m
ZRAE02B01	0...0,5 m		