

Reflex Sensor with Background Suppression

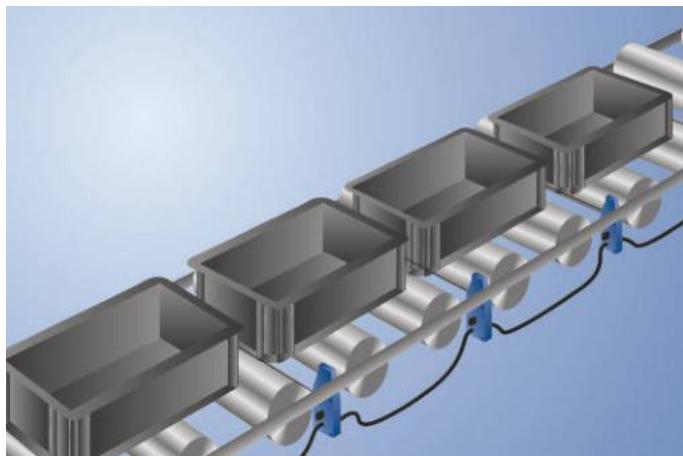
OPT1542

Part Number



- Energy savings thanks to EcoMode
- Increased capacity thanks to intelligent functions
- Optimized performance
- Time-saving initial start-up with fast-clip mounting system and quick wiring
- Wireless settings via NFC

These sensors have been specially designed for use in accumulation roller conveyors. Their compact design allows for installation between rollers below the transport level. High-precision background suppression makes it possible to reliably detect even black objects at up to 900 mm. Settings are entered via wireless NFC, which is even possible in the de-energized state. Thanks to the innovative fast-clip mounting system and quick wiring, the sensors are installed and ready for use in no time flat.



Technical Data

Optical Data

Range	900 mm
Switching Hysteresis	< 5 %
Light Source	Infrared Light
Wavelength	860 nm
Service Life (T = +25 °C)	100000 h
Risk Group (EN 62471)	1
Max. Ambient Light	90000 Lux
Opening Angle	3 °

Electrical Data

Supply Voltage	20,6...30 V DC
Current Consumption Sensor (Ub = 24 V)	< 16 mA
EcoMode	yes
Switching Frequency	100 Hz
Response Time	5 ms
Temperature Drift	< 5 %
Temperature Range	-40...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 0,9 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Logic	yes
Single Discharge	yes
Block Forwarding	yes
Solenoid Valve	yes
Automatic Roller Shutdown	yes
Protection Class	III

Mechanical Data

Setting Method	NFC
Housing Material	Plastic
Degree of Protection	IP65
Connection	M12 x 1; 4-pin
Cable Length	200 cm

Pneumatic Solenoid Valve Unit

Valve no.	K04
Supply Voltage Valve	19,2...28,8 V
Current Consumption Valve	86 mA
Valve temperature range	-15...50 °C
Operating Pressure	4...7 bar
Nominal Width	0,8 mm
Nominal flow rate 1 -> 2	20 NL/min
Nominal flow rate 2 -> 3	100 NL/min
Supply-Line Connector Pipe	2x 8x1
Working-Line Connector Pipe	4x1
Valve function	3/2-Way
Switching function	NC
PNP NO/NC switchable	●
NFC Receiver Category 3	●
Connection Diagram No.	146
Control Panel No.	OP3
Suitable Connection Equipment No.	2 2s
Suitable Mounting Technology No.	421

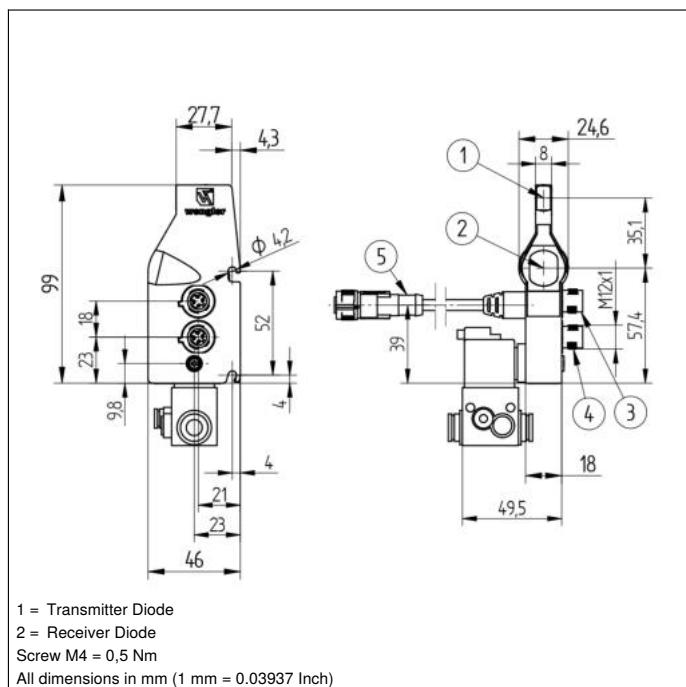
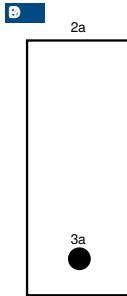
Complementary Products

Adapter OPT70N, OPT70S, OPT70P

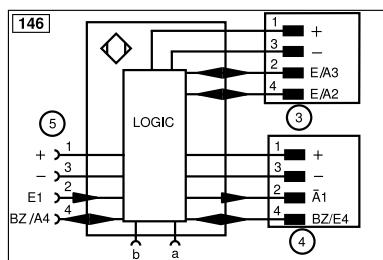
Software

USB NFC Adapter

ZPTX001 Quick Mount


Ctrl. Panel


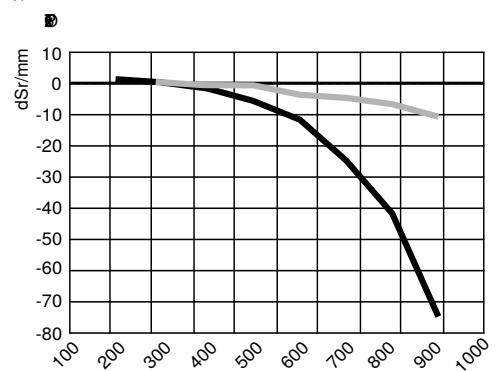
2a = NFC interface
3a = Switching Status Indicator/Error Indicator


Legend

+	Supply Voltage +	nc	Not connected	EN _{RS422}	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	EN _A	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	EN _B	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	Aok	Digital output OK
ĀV	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization IN
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	AMV	Valve Output	Ol	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link		Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
EN _{RS422}	Encoder 0-pulse 0/0 (TTL)	EDM	Contactor Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	EN _{RS422}	Encoder A/Ā (TTL)		

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission



Sr = Switching Distance

dSr = Switching Distance Change

— black 6 % remission
— grey 18 % remission

