


Capacitive Sensors  
BCS M18BBH1-NOC15H-EP02  
Order Code: BCS00M0



1) Sensing surface, 2) Housing, 3) Cover, 4) Potentiometer, 5) LED Power, 6) LED function indicator

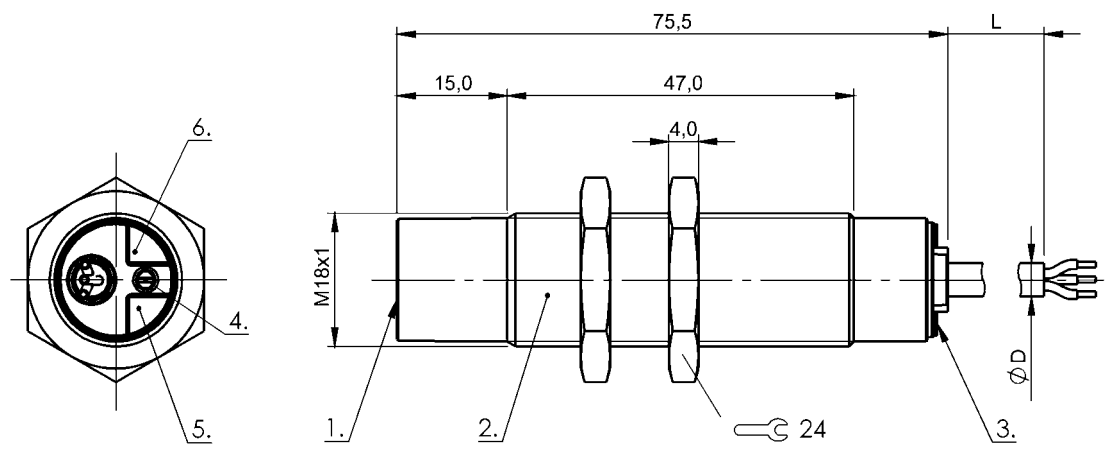

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2
Scope of delivery	Nut (2x)
Sensitivity	Switching distance adjustable
Series	M18
Trademark	Global

Display/Operation

Function indicator	yes
Power indicator	yes

Electrical connection

Cable diameter D	4.60 mm
Cable length L	2 m
Conductor cross-section	0.34 mm <sup>2</sup>
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	no
Short-circuit protection	yes

Electrical data

No-load current I <sub>0</sub> max. at U <sub>e</sub>	20 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Protection class	II
Rated insulation voltage U <sub>i</sub>	75 V DC
Rated operating current I <sub>e</sub>	100 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Ready delay t <sub>v</sub> max.	300 ms
Ripple max. (% of U <sub>e</sub> )	10 %
Switching frequency	100 Hz
Utilization category	DC -13
Voltage drop static max.	1.5 V

Environmental conditions

Ambient temperature	-25...85 °C
IP rating	IP67

Functional safety

MTTF (40 °C)	226 a
--------------	-------

Interface

Switching output	NPN normally closed (NC)
------------------	--------------------------

Material

Cover material	PA
Housing material	PBT
Material jacket	PUR
Material sensing surface	PBT

Mechanical data

Dimension	Ø 18 x 75.5 mm
Installation	non-flush
Size	M18x1
Thread (A)	M18x1
Tightening torque	2 Nm

Range/Distance

Hysteresis H max. (% of Sr)	15.0 %
Measuring range	2...15 mm
Rated operating distance Sn	15 mm
Repeat accuracy max. (% of Sr)	2.0 %
Temperature drift max. (% of Sr)	20 % [-5...55 °C]

Remarks

The potentiometer does not have a fixed stop, but can be turned endlessly without destroying anything.  
If no change in the switching signal is detected, the potentiometer should be turned forwards or backwards until a signal change occurs at the output.  
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams

