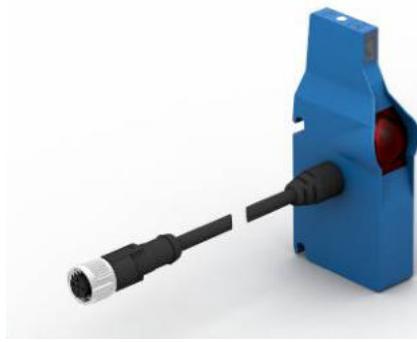


Reflex Sensor with Background Suppression

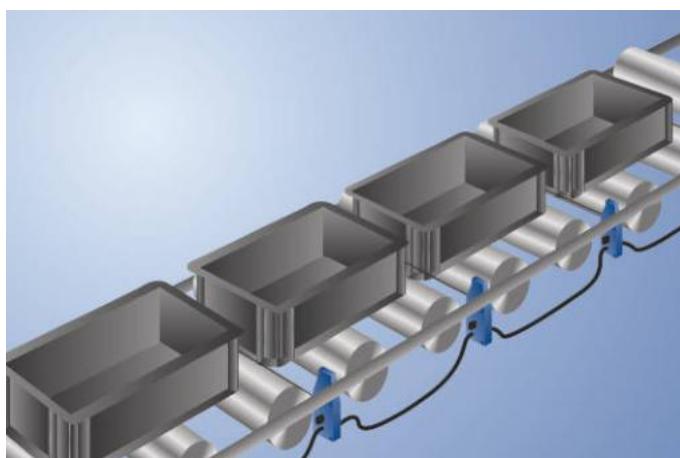
OPT1543

Part Number



- Energy-saving
- Increased capacity thanks to intelligent functions
- Optimized performance
- Time-saving initial start-up with fast-clip mounting system and quick wiring
- Wireless settings via NFC

These sensors have been specially designed for use in accumulation roller conveyors. Their compact design allows for installation between rollers below the transport level. High-precision background suppression makes it possible to reliably detect even black objects at up to 900 mm. Settings are entered via wireless NFC, which is even possible in the de-energized state. Thanks to the innovative fast-clip mounting system and quick wiring, the sensors are installed and ready for use in no time flat.



Technical Data

Optical Data

Range	900 mm
Switching Hysteresis	< 5 %
Light Source	Infrared Light
Wavelength	860 nm
Service Life (T = +25 °C)	100000 h
Risk Group (EN 62471)	1
Max. Ambient Light	90000 Lux
Opening Angle	3 °

Electrical Data

Supply Voltage	12...30 V DC
Current Consumption Sensor (Ub = 24 V)	< 16 mA
Switching Frequency	100 Hz
Response Time	5 ms
Temperature Drift	< 5 %
Temperature Range	-40...60 °C
Number of Switching Outputs	2
Switching Output Voltage Drop	< 0,9 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Logic	yes
Single Discharge	yes
Block Forwarding	yes
Output Magnetic Valve/Engine	yes
Automatic Roller Shutdown	yes
Protection Class	III

Mechanical Data

Setting Method	NFC
Housing Material	Plastic
Degree of Protection	IP67
Connection	M12 x 1; 4-pin
Cable Length	100 cm
PNP NO/NC switchable	
NFC Receiver Category 3	
Connection Diagram No.	147
Control Panel No.	OP3
Suitable Connection Equipment No.	2 2s
Suitable Mounting Technology No.	421

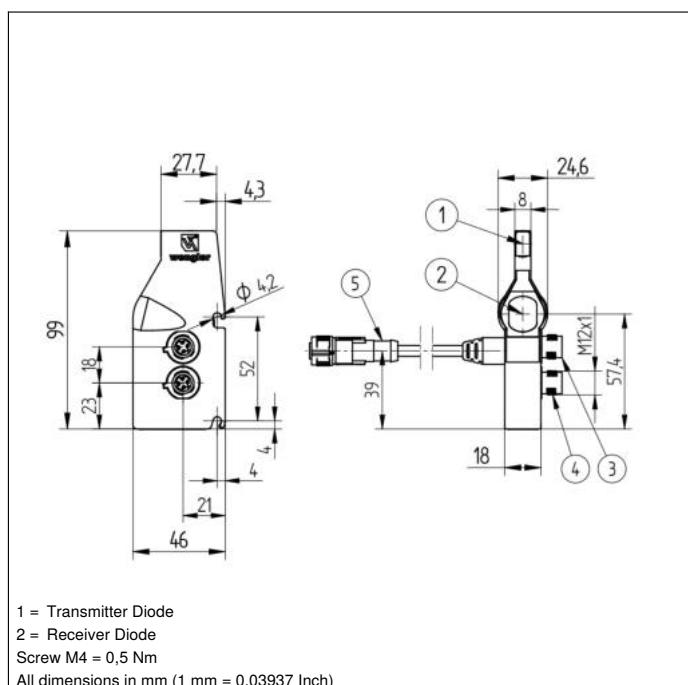

Complementary Products

Adapter OPT70N, OPT70S, OPT70P

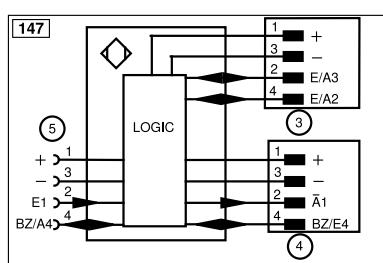
Software

USB NFC Adapter

ZPTX001 Quick Mount


Ctrl. Panel


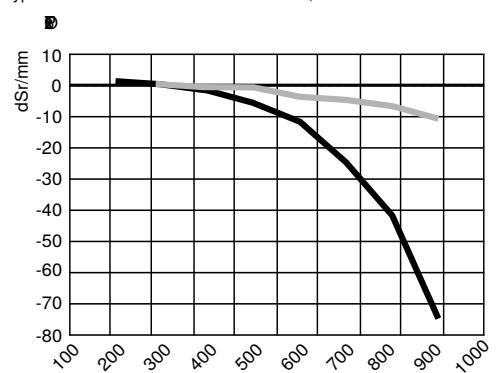
2a = NFC interface
3a = Switching Status Indicator/Error Indicator


Legend

+	Supply Voltage +	nc	Not connected	EN _{RS422}	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	EN _A	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	EN _B	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ā	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	Aok	Digital output OK
V̄	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	AMV	Valve Output	Ol	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link		Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
EN0_RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contactor Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	EN _{RS422}	Encoder A/Ā (TTL)		

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission



S_r = Switching Distance

dS_r = Switching Distance Change

— black 6 % remission
— grey 18 % remission

