




- Compact housing
- IO-Link interface
- Large detection range
- Teach-in, external teach-in

The transmitter and receiver in these sensors are located in a single housing. The sensor evaluates transmitted light reflected back from the object. The output is switched as soon as an object passes the selected range. Bright objects reflect more light than dark objects, and can thus be recognized from greater distances.

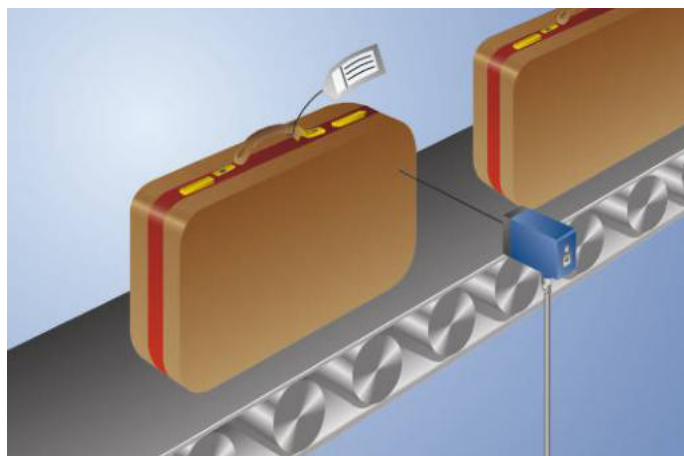


## Technical Data

| Optical Data                                |                |
|---------------------------------------------|----------------|
| Range                                       | 500 mm         |
| Switching Hysteresis                        | < 10 %         |
| Light Source                                | Infrared Light |
| Wavelength                                  | 850 nm         |
| Service Life (T = +25 °C)                   | 100000 h       |
| Max. Ambient Light                          | 10000 Lux      |
| Opening Angle                               | 12 °           |
| Electrical Data                             |                |
| Supply Voltage                              | 18...30 V      |
| Current Consumption (U <sub>b</sub> = 24 V) | < 30 mA        |
| Switching Frequency                         | 2500 Hz        |
| Response Time                               | 200 µs         |
| On-/Off-Delay                               | 0...60 s       |
| Temperature Drift                           | < 10 %         |
| Temperature Range                           | -25...60 °C    |
| Switching Output Voltage Drop               | < 2,5 V        |
| PNP Switching Output/Switching Current      | 100 mA         |
| Residual Current Switching Output           | < 50 µA        |
| Short Circuit Protection                    | yes            |
| Reverse Polarity Protection                 | yes            |
| Overload Protection                         | yes            |
| Lockable                                    | yes            |
| Teach Mode                                  | NT, MT         |
| Interface                                   | IO-Link V1.0   |
| IO-Link Parameter                           | 12             |
| Protection Class                            | III            |
| Mechanical Data                             |                |
| Setting Method                              | Teach-In       |
| Housing Material                            | Plastic        |
| Full Encapsulation                          | yes            |
| Degree of Protection                        | IP67           |
| Connection                                  | M12 × 1; 4-pin |
| IO-Link                                     | ●              |
| PNP NO/NC switchable                        | ●              |
| Connection Diagram No.                      | 179            |
| Control Panel No.                           | M3             |
| Suitable Connection Equipment No.           | 2              |
| Suitable Mounting Technology No.            | 360            |


## Complementary Products

|                               |
|-------------------------------|
| IO-Link Master                |
| PNP-NPN Converter BG2V1P-N-2M |
| Software                      |

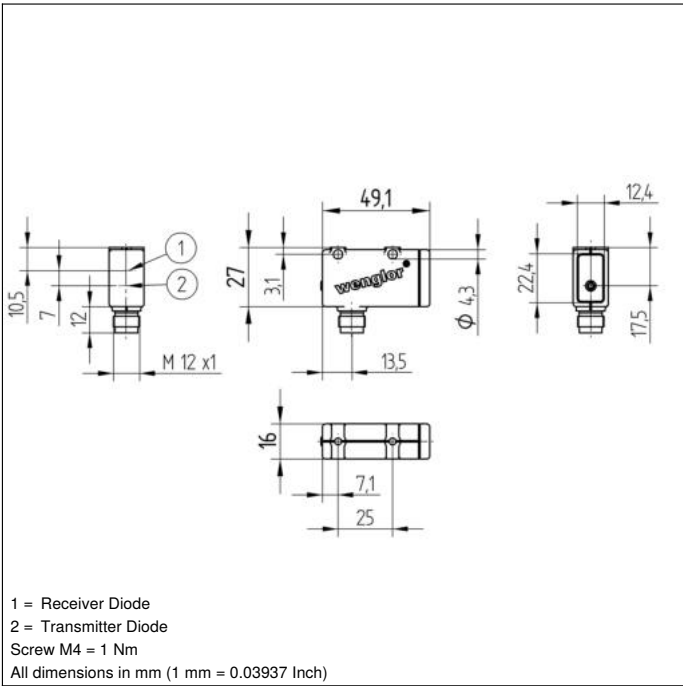


# Ctrl. Panel

M3



06 = Teach Button  
30 = Switching Status/Contamination Warning

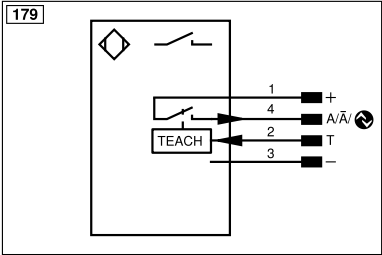

| Legend    |                                            |                                        |                                |
|-----------|--------------------------------------------|----------------------------------------|--------------------------------|
| +         | Supply Voltage +                           | nc                                     | Not connected                  |
| -         | Supply Voltage 0 V                         | U                                      | Test Input                     |
| ~         | Supply Voltage (AC Voltage)                | Ū                                      | Test Input inverted            |
| A         | Switching Output (NO)                      | W                                      | Trigger Input                  |
| Ā         | Switching Output (NC)                      | W-                                     | Ground for the Trigger Input   |
| V         | Contamination/Error Output (NO)            | O                                      | Analog Output                  |
| Ȳ         | Contamination/Error Output (NC)            | O-                                     | Ground for the Analog Output   |
| E         | Input (analog or digital)                  | BZ                                     | Block Discharge                |
| T         | Teach Input                                | Amv                                    | Valve Output                   |
| Z         | Time Delay (activation)                    | a                                      | Valve Control Output +         |
| S         | Shielding                                  | b                                      | Valve Control Output 0 V       |
| RxD       | Interface Receive Path                     | SY                                     | Synchronization                |
| TxD       | Interface Send Path                        | SY-                                    | Ground for the Synchronization |
| RDY       | Ready                                      | E+                                     | Receiver-Line                  |
| GND       | Ground                                     | S+                                     | Emitter-Line                   |
| CL        | Clock                                      | ±                                      | Grounding                      |
| E/A       | Output/Input programmable                  | SnR                                    | Switching Distance Reduction   |
| IO-Link   |                                            | Rx+/-                                  | Ethernet Receive Path          |
| PoE       | Power over Ethernet                        | Tx+/-                                  | Ethernet Send Path             |
| IN        | Safety Input                               | Bus                                    | Interfaces-Bus A(+)/B(-)       |
| OSSD      | Safety Output                              | La                                     | Emitted Light disengageable    |
| Signal    | Signal Output                              | Mag                                    | Magnet activation              |
| BL_D+/-   | Ethernet Gigabit bidirect. data line (A-D) | RES                                    | Input confirmation             |
| ENo RS422 | Encoder 0-pulse 0/0 (TTL)                  | EDM                                    | Contact Monitoring             |
| PT        | Platinum measuring resistor                | ENARIS422                              | Encoder A/Ā (TTL)              |
|           |                                            | ENBRIS422                              | Encoder B/Ē (TTL)              |
|           |                                            | ENA                                    | Encoder A                      |
|           |                                            | ENb                                    | Encoder B                      |
|           |                                            | AMIN                                   | Digital output MIN             |
|           |                                            | AMAX                                   | Digital output MAX             |
|           |                                            | AOK                                    | Digital output OK              |
|           |                                            | SY In                                  | Synchronization In             |
|           |                                            | SY OUT                                 | Synchronization OUT            |
|           |                                            | OLt                                    | Brightness output              |
|           |                                            | M                                      | Maintenance                    |
|           |                                            | rsv                                    | Reserved                       |
|           |                                            | Wire Colors according to DIN IEC 60757 |                                |
|           |                                            | BK                                     | Black                          |
|           |                                            | BN                                     | Brown                          |
|           |                                            | RD                                     | Red                            |
|           |                                            | OG                                     | Orange                         |
|           |                                            | YE                                     | Yellow                         |
|           |                                            | GN                                     | Green                          |
|           |                                            | BU                                     | Blue                           |
|           |                                            | VT                                     | Violet                         |
|           |                                            | GY                                     | Grey                           |
|           |                                            | WH                                     | White                          |
|           |                                            | PK                                     | Pink                           |
|           |                                            | GNYE                                   | Green/Yellow                   |

