

Reflex Sensor with Background Suppression


P1NH310

Part Number



- **Blue light for dark, shiny objects**
- **Condition monitoring**
- **IO-Link 1.1**
- **Reliably detect objects against any background**

The reflex sensor with background suppression works with blue light according to the angle measurement principle and is designed to detect objects against any background. The sensor always has the same switching distance, regardless of the color, shape and surface of the objects. The reflect sensor with blue light is specially designed for applications with dark shiny objects, such as when manufacturing solar wafers. The IO-Link interface can be used to configure the reflex sensors (PNP/NPN, NC/NO, switching distance), as well as for reading out switching statuses and distance values.

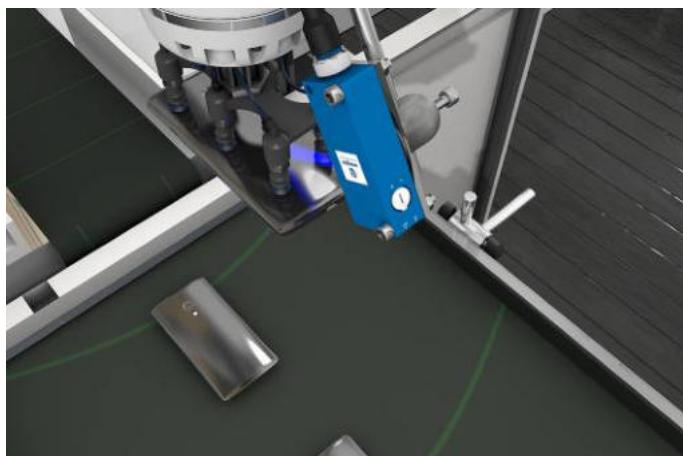

Technical Data

Optical Data

Range	400 mm
Adjustable Range	50...400 mm
Switching Hysteresis	< 3 %
Light Source	Blue Light
Service Life (T = +25 °C)	100000 h
Risk Group (EN 62471)	1
Max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1

Electrical Data


Supply Voltage	15...30 V DC
Supply Voltage with IO-Link	18...30 V DC
Current Consumption (Ub = 24 V)	< 20 mA
Switching Frequency	800 Hz
Switching Frequency (interference-free mode)	500 Hz
Response Time	1,25 ms
Response time (interference-free mode)	1,5 ms
Temperature Drift	< 7,5 %
Temperature Range	-40...60 °C
Switching Output Voltage Drop	< 2 V
Switching Output/Switching Current	100 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III

Mechanical Data


Setting Method	Potentiometer
Housing Material	Plastic
Degree of Protection	IP67/IP68
Connection	M12 x 1; 4-pin
Optic Cover	PMMA
NPN NO/NC antivalent	
IO-Link	
Connection Diagram No.	213
Control Panel No.	A28
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	350

Complementary Products


Dust Extraction Tube STAUBTUBUS-03
IO-Link Master
Set Protective Housing Z1NS001
Software

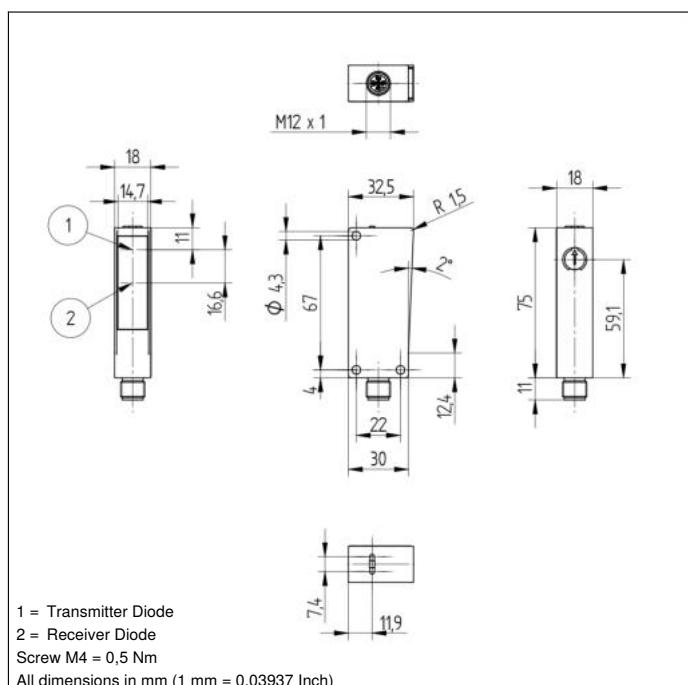

Ctrl. Panel

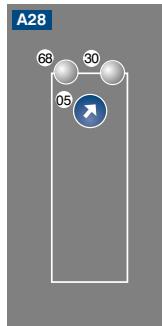

05 = Switching Distance Adjuster
30 = Switching Status/Contamination Warning
68 = Supply Voltage Indicator

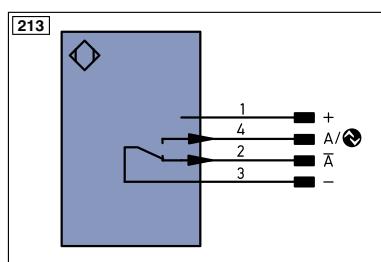

Legend


PT	Platinum measuring resistor
nc	not connected
U	Test Input
Ü	Test Input inverted
W	Trigger Input
W -	Ground for the Trigger Input
O	Analog Output
O -	Ground for the Analog Output
BZ	Block Discharge
Awv	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY -	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
±	Grounding
SnR	Switching Distance Reduction
RxD	Interface Receive Path
TXD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
IO-Link	IO-Link
PoE	Power over Ethernet
IN	Safety Input
OSD	Safety Output
Signal	Signal Output
BL-D	Ethernet Gigabit bidirect. data line (A-D)
ENoRS422	Encoder 0-pulse 0-0 (TTL)
Encoder A/Ā (TTL)	Encoder A/Ā (TTL)
ENoRS422	Encoder B/Ā (TTL)
ENA	Encoder A
ENB	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY IN	Synchronization IN
SY OUT	Synchronization OUT
OLT	Brightness output
M	Maintenance
rsv	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GN/YE	Green/Yellow

Table 1

Detection Range	50 mm	200 mm	400 mm
Light Spot Diameter	11 mm	13 mm	14 mm

Switching Distance Deviation

Typical characteristic curve based on white, 90 % remission

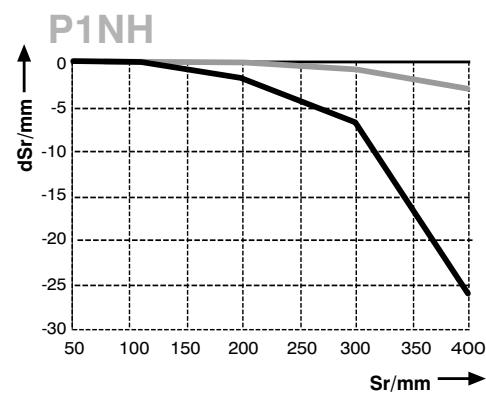

Sr = Switching Distance

dSr = Switching Distance Change

— black 6 % remission

— grey 18 % remission

