


Receptacles  
BCC A355-0000-20-RN022-020  
Order Code: BCC098R

**BALLUFF**



1) O-ring, 2) Locknut

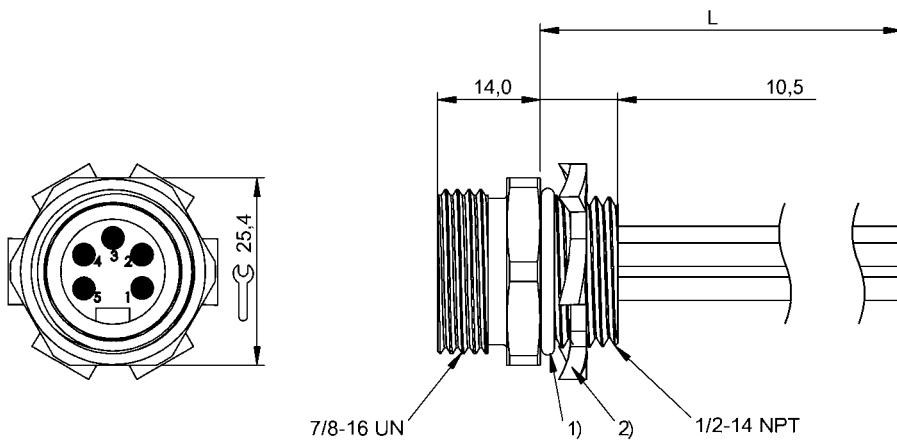

#### Basic features

Application	Panel connector
Approval/Conformity	CE cULus WEEE

#### Electrical connection

Conductor cross-section	16 AWG
Connection	7/8"-Male, straight, 5-pin
Number of conductors	5

#### Electrical data

Operating voltage Ub	600 VDC / 600 VAC
Rated current (40 °C)	8.0 A

#### Environmental conditions

Ambient temperature	-40...105 °C
IP rating	IP67

#### Material

Conductor insulation material	PVC
Material contact carrier	PVC
Material contacts	Copper alloy, gold plated
Material cover nut	Steel
Material grip	Zinc plated
	Aluminum, Anodized


#### Mechanical data

Lead length L	2.00 m
Mounting part	1/2" NPT
Tightening torque pigtail	1.5 Nm

#### Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

### Connector Drawings



PIN 1: black  
PIN 2: blue  
PIN 3: green/yellow  
PIN 4: brown  
PIN 5: white

### Wiring Diagrams

1 \_\_\_\_\_  
2 \_\_\_\_\_  
3 \_\_\_\_\_  
4 \_\_\_\_\_  
5 \_\_\_\_\_