

Safety Switch

RFID


SD4RAS01TN89

Part Number



- Easy to clean
- High level of manipulation protection thanks to RFID coding
- Protection mode IP69K
- Universal fastening opportunities

Separating safety devices can be easily protected up to cat. 4 PL e using these contactless safety switches, even during series connection. Response and risk times remain unchanged at all times. Extensive diagnosis functions boost system availability and make installation and maintenance easier. The locking version can be used as a stop and secures small doors or flaps.

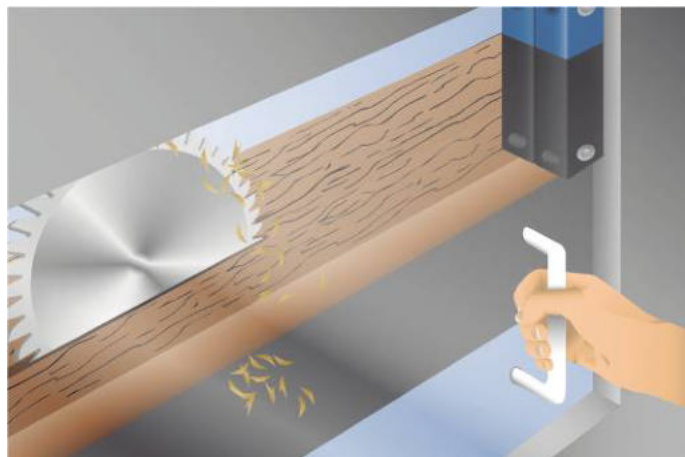


Technical Data

Electrical Data	
Sensor Type	Switch
Supply Voltage	20,4...26,4 V DC
Response Time	< 100 ms
Risk time	< 200 ms
Temperature Range	-25...70 °C
Storage temperature	-25...85 °C
Safety Output	OSSD
No. Safety Outputs (OSSDs)	2
PNP Safety Output/Switching Current	< 250 mA
Safety Output Voltage Drop	< 1 V
Number of Signal Outputs	1
PNP signal output switching current	50 mA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Protection Class	II
Mechanical Data	
Switching Distance	12 mm
Protected Sao switching-off distance	10 mm
Protected Sar switching-off distance	16 mm
Housing Material	Plastic
Degree of Protection	IP65/IP67/IP69K
Connection	M12 × 1; 8-pin
Safety-relevant Data	
Operating principle	RFID
Coding	Individual, teachable
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
PFHD	2,70 × E-10 1/h
Safety Integrity Level (EN 61508)	SIL3
Safety Integrity Level (EN 62061)	SILCL3
PDDb (EN 60947-5-3)	yes
Function	
Series Connection	yes
Applicable actuator	SD4RAA01
Connection Diagram No.	P02
Suitable Connection Equipment No.	89


Complementary Products

Safety Relay SR4B3B01S, SR4D3B01S
Seal Set Z0047
Software

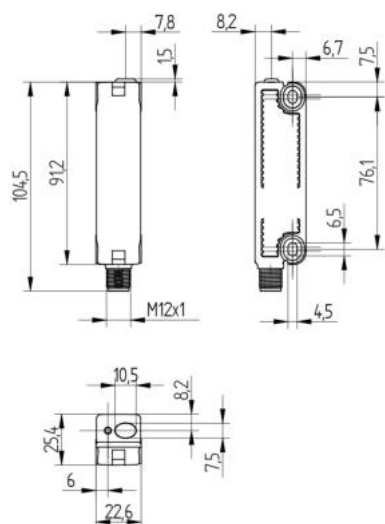

All dimensions in mm (1 mm = 0.03937 Inch)

P02



Legend

+	Supply Voltage +	PT	Platinum measuring resistor
-	Supply Voltage 0 V	nc	not connected
~	Supply Voltage (AC Voltage)	U	Test Input
A	Switching Output (NO)	U	Test Input inverted
Ā	Switching Output (NC)	W	Trigger Input
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input
V̄	Contamination/Error Output (NC)	O	Analog Output
E	Input (analog or digital)	O-	Ground for the Analog Output
T	Teach Input	BZ	Block Discharge
Z	Time Delay (activation)	AWV	Valve Output
S	Shielding	a	Valve Control Output +
RxD	Interface Receive Path	b	Valve Control Output 0 V
TxD	Interface Send Path	SY	Synchronization
RDY	Ready	SY-	Ground for the Synchronization
GND	Ground	E+	Receiver-Line
CL	Clock	S+	Emitter-Line
E/A	Output/Input programmable	±	Grounding
IO-Link	IO-Link	SnR	Switching Distance Reduction
PoE	Power over Ethernet	Rx+/-	Ethernet Receive Path
IN	Safety Input	Tx+/-	Ethernet Send Path
OSSD	Safety Output	Bus	Interfaces-Bus A(+)/B(-)
Signal	Signal Output	La	Emitted Light disengageable
BI-D+/-	Ethernet Gigabit bidirect. data line (A-D)	Mag	Magnet activation
EN0 RS422	Encoder 0-pulse 0-0 (TTL)	RES	Input confirmation
		EDM	Contacting Monitoring

ENAR5422	Encoder A/Ā (TTL)
ENB5422	Encoder B/B̄ (TTL)
ENa	Encoder A
ENb	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY in	Synchronization In
SY OUT	Synchronization OUT
OLt	Brightness output
M	Maintenance
rsv	reserved

Wire Colors according to IEC 60757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

