

Safety Light Curtain


Hand Protection

SEFG518

Part Number



The safety light curtain can be flexibly integrated into systems thanks to the well-conceived mounting technology and the compact housing. Alignment of the emitter and the receiver is simplified by the visible red light and the signal strength display. User-friendly wTeach2 software make settings and diagnosis via the IO-Link interface extremely easy. Settings can be subsequently saved to a microSD card and quickly duplicated on other products. Extensive blanking and muting functions ensure an ideal solution for every application, in order to safely transport objects into and out of the danger zone.

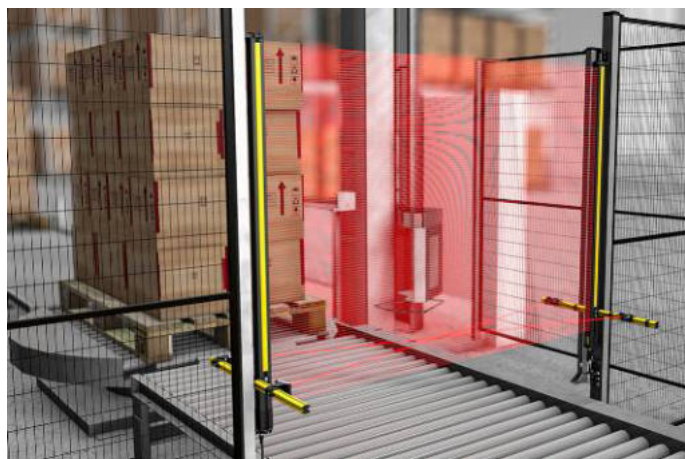

Technical Data


Optical Data	
Range	0,25...20 m
Housing Length (L)	1310 mm
Safety Field Height (SFH)	1211 mm
Resolution	30 mm
Light Source	Red Light
Wavelength	630 nm
Opening Angle	± 2,5 °
Electrical Data	
Sensor Type	Emitter
Supply Voltage	19,2...28,8 V DC
Current Consumption (U _b = 24 V)	≤ 100 mA
Response Time	14,4 ms
Temperature Range	-30...55 °C
Storage temperature	-30...70 °C
No. Safety Outputs (OSSDs)	2
Safety Output Voltage Drop	≤ 2,3 V
PNP Safety Output/Switching Current	≤ 300 mA
Number of Signal Outputs	1
Signal Output Voltage Drop	≤ 2,5 V
Signal Output/Switching Current	≤ 100 mA
Short Circuit and Overload Protection	yes
Interface	IO-Link V1.1
Protection Class	III
Mechanical Data	
Housing Material	Aluminum
Disc Material	Polycarbonate
Degree of Protection	IP65/IP67
Connection	M12 × 1; 5-pin
Safety-relevant Data	
ESPE Type (EN 61496)	4
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
Mission Time TM (EN ISO 13849-1)	20 a
Safety Integrity Level (EN 61508)	SIL3
Safety Integrity Level (EN 62061)	SILCL3
Function	
Hand Protection	yes
Connection Diagram No.	1031
Control Panel No.	A38
Suitable Connection Equipment No.	35
Suitable Mounting Technology No.	860 870 880

Suitable Receiver

SEFG618

Complementary Products

Protection column with Z2SU002 path-folding mirror
Protection columns with/without protective screen (Z2SS002/ Z2SM002)
Z0032 path-folding mirror



A38

68		03
8a		95
	23	
	20	

03 = Error Indicator

68 = Supply Voltage Indicator

8a = Coding

95 = Diagnosis/Large Detection Range

+	Supply Voltage +
–	Supply Voltage 0 V
~	Supply Voltage (AC Voltage)
A	Switching Output (NO)
Ā	Switching Output (NC)
V	Contamination/Error Output (NO)
Ī	Contamination/Error Output (NC)
E	Input (analog or digital)
T	Teach Input
Z	Time Delay (activation)
S	Shielding
RxD	Interface Receive Path
TxD	Interface Send Path
RDY	Ready
GND	Ground
CL	Clock
E/A	Output/Input programmable
	IO-Link
PoE	Power over Ethernet
IN	Safety Input
QSSD	Safety Output
Signal	Signal Output
Bl-D+/–	Ethernet Gigabit bidirect. data line (A-D)
EN0 RS422	Encoder 0-pulse 0-0 (TTL)

PT	Platinum measuring resistor
nc	not connected
U	Test Input
$\bar{U}$	Test Input inverted
W	Trigger Input
W –	Ground for the Trigger Input
O	Analog Output
O –	Ground for the Analog Output
BZ	Block Discharge
AWV	Valve Output
a	Valve Control Output +
b	Valve Control Output 0 V
SY	Synchronization
SY –	Ground for the Synchronization
E+	Receiver-Line
S+	Emitter-Line
$\pm$	Grounding
SnR	Switching Distance Reduction
Rx+/-	Ethernet Receive Path
Tx+/-	Ethernet Send Path
Bus	Interfaces-Bus A(+)/B(-)
La	Emitted Light disengageable
Mag	Magnet activation
RES	Input confirmation
EDM	Contacteur Monitoring

ENAR542Z	Encoder A/ $\bar{A}$ (TTL)
ENBR542Z	Encoder B/B (TTL)
ENA	Encoder A
ENB	Encoder B
AMIN	Digital output MIN
AMAX	Digital output MAX
AOK	Digital output OK
SY In	Synchronization In
SY OUT	Synchronization OUT
OLT	Brightness output
M	Maintenance
RSV	reserved
Wire Colors according to IEC 60757	
BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GNYE	Green/Yellow

Wire Colors according to IEC 60757

BK	Black
BN	Brown
RD	Red
OG	Orange
YE	Yellow
GN	Green
BU	Blue
VT	Violet
GY	Grey
WH	White
PK	Pink
GYNE	Green/Yellow