

Safety Light Curtain

Hand Protection


SEMG517

Part Number



- Easy configuration via wiring
- Protection field over the entire length of the housing for an installation without protrusion
- Quick alignment through visible red light
- Slim design for easy integration

These safety light curtains confidently solve all basic tasks. The basic function protection mode, restart inhibit and protection monitoring are standard and can be easily configured. The protective field always extends up to the end of the housing without protrusion. As a result, protection is easily provided even in confined installation conditions. The adequate mounting angle ZEMX001 is included in the delivery.

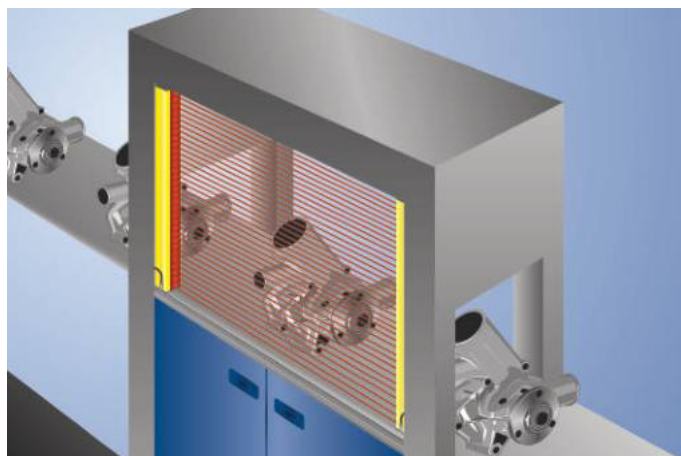

Technical Data


Optical Data	
Range	0,25...14 m
Housing Length (L)	1062 mm
Safety Field Height (SFH)	1087 mm
Resolution	30 mm
Light Source	Red Light
Wavelength	630 nm
Opening Angle	± 2,5 °
Electrical Data	
Sensor Type	Emitter
Supply Voltage	19,2...28,8 V DC
Current Consumption (U _b = 24 V)	100 mA
Temperature Range	-25...55 °C
Storage temperature	-25...60 °C
Reverse Polarity Protection	yes
Protection Class	III
Mechanical Data	
Housing Material	Aluminum
Disc Material	Polycarbonate
Degree of Protection	IP65/IP67
Connection	M12 × 1; 4/5-pin
Cable Length	300 mm
Safety-relevant Data	
ESPE Type (EN 61496)	4
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
Mission Time TM (EN ISO 13849-1)	20 a
Safety Integrity Level (EN 61508)	SIL3
Safety Integrity Level (EN 62061)	SILCL3
Function	
Hand Protection	yes
Scope of functions	Basic function
Scope of delivery	Mounting ZEMX001
Connection Diagram No.	362
Control Panel No.	SR4
Suitable Connection Equipment No.	2 35
Suitable Mounting Technology No.	790 810 820

Suitable Receiver

SEMG617


Complementary Products

Path-Folding Mirror Z2UG003
Protection column with deflection mirror Z2SU002
Protection Column with Path-Folding Mirror SZ000EU125NN01
Protection Column with Protective Screen SZ000EG125NN01
Protection column with protective screen Z2SS002
Software

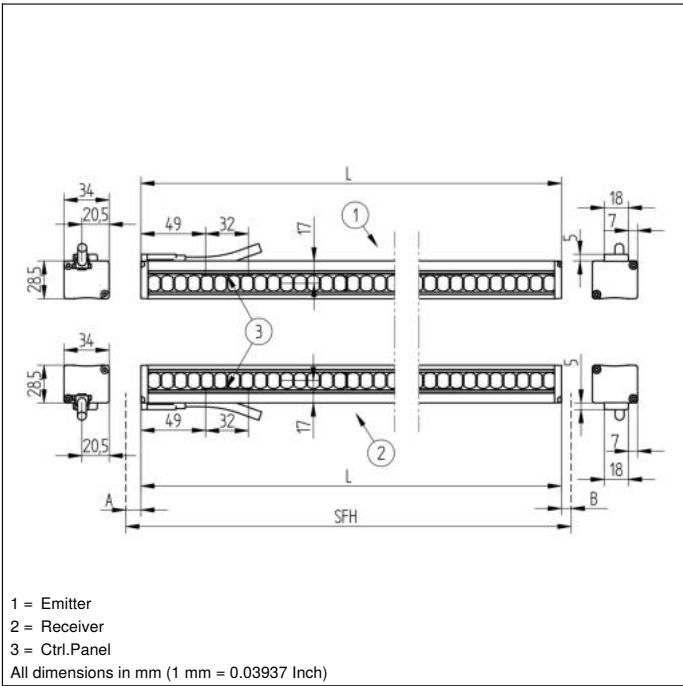


Ctrl. Panel

SR4



- 03 = Error Indicator
- 04 = Function Indicator
- 64 = Diagnosis/Test
- 94 = Diagnosis
- 95 = Diagnosis/Large Detection Range

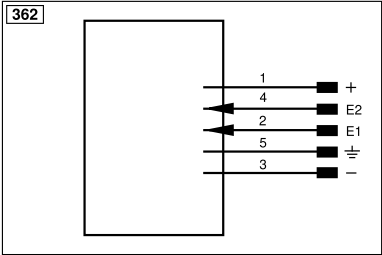

Legend						
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)	
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A	
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENb	Encoder B	
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN	
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX	
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK	
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In	
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT	
T	Teach Input	Amv	Valve Output	OLT	Brightness output	
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance	
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved	
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757		
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black	
RDY	Ready	E+	Receiver-Line	BN	Brown	
GND	Ground	S+	Emitter-Line	RD	Red	
CL	Clock	±	Grounding	OG	Orange	
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow	
IO-Link		Rx+/-	Ethernet Receive Path	GN	Green	
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue	
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet	
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey	
Signal	Signal Output	Mag	Magnet activation	WH	White	
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink	
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow	
PT	Platinum measuring resistor	ENAR5422	Encoder A/A (TTL)			