

Preventa RFID safety switch, Telemecanique
Safety switches XCS, contactless Daisy Chain
model, 2 new re pairing enabled



Main

Range of product	Telemecanique Safety switches XCS
Product or component type	Preventa RFID safety switch
Component name	XCSRC

Complementary

Design	Rectangular, standard
Size	Transponder: 50 x 15 x 15 mm Reader: 119.6 x 30 x 15 mm
Material	Valox
Electrical connection	2 male connectors
Connector type	M12 male
Type of output stage	Solid-state, PNP
Safety outputs	2 NO
Number of poles	5
Local signalling	Green, orange and red 2 multi-colour LEDs
[Sao] assured operating sensing distance	10 mm face to face
[Sar] assured release sensing distance	35 mm face to face
Approach directions	3 directions-transponder with rotary sensing face
[Ue] rated operational voltage	24 V DC (- 20...10 %)SELV or PELV conforming to IEC 60204-1
[Ie] rated operational current	60 mA
[Ui] rated insulation voltage	30 V DC
[Uiimp] rated impulse withstand voltage	0.8 kV conforming to IEC 60947-5-2
Protection type	Short-circuit protection
Maximum switching voltage	26.4 V DC
Switching capacity in mA	200 mA
Switching frequency	<= 0.5 Hz
risk time	120 ms + 18 ms per additional switch connected in series
Response time	120 ms + 50 ms typical per additional switch connected in series
Maximum delay first up	5 s
Tightening torque	< 1.5 N.m
Standards	IEC 60947-5-2 IEC 60947-5-3 ISO 14119
Product certifications	CSA 22-2[RETURN]FCC[RETURN]IC[RETURN]RCM[RETURN]Ecolab[RETURN]TÜV[RETURN]EN[RETURN]IE2[RETURN]

Marking	CULus TÜV IC CE FCC RCM EAC
Safety level	SIL 3 conforming to IEC 61508 SILCL 3 conforming to IEC 62061 PL = e conforming to ISO 13849-1 Category 4 conforming to ISO 13849-1
Safety reliability data	PFH_D = 5E-10/h conforming to IEC 62061 PFH_D = 5E-10/h conforming to ISO 13849-1
Mission time	20 year(s)
Ambient air temperature for operation	-25...70 °C
Ambient air temperature for storage	-40...85 °C
Vibration resistance	10 gn (f= 10...150 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn for 11 ms conforming to IEC 60068-2-27
Electrical shock protection class	Class III conforming to IEC 61140
IP degree of protection	IP65 conforming to IEC 60529 IP66 conforming to IEC 60529 IP67 conforming to IEC 60529 IP69K conforming to DIN 40050


Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.3 cm
Package 1 Width	14.8 cm
Package 1 Length	17.5 cm
Package 1 Weight	106.0 g
Unit Type of Package 2	S01
Number of Units in Package 2	12
Package 2 Height	15.0 cm
Package 2 Width	15.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	1.447 kg

Offer Sustainability

Sustainable offer status	Green Premium product
Circularity Profile	No need of specific recycling operations
California proposition 65	WARNING: This product can expose you to chemicals including: Diisobutyl phthalate (DINP), which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
For all Reach Rohs enquiries contact us at	sustainability@tesensors.com


Dimensions

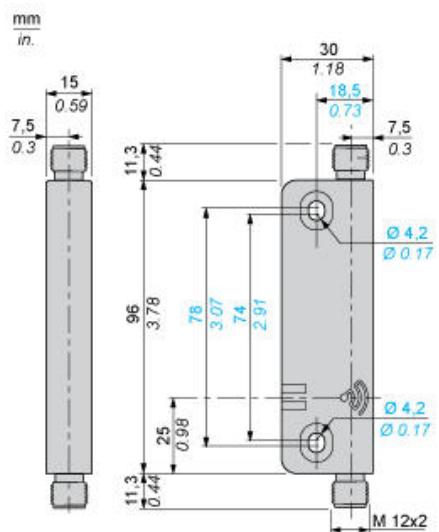

Connections


M12 Connectors, 5-pin

Output Connector



- (1) + 24 VDC
- (2) OSSD2 (O2)
- (3) 0 VDC
- (4) OSSD1 (O1)
- (5) Diagnosis Out (Do)

Input Connector




- (1) + 24 VDC
- (2) INPUT 2 (I2)
- (3) 0 VDC
- (4) INPUT 1 (I1)
- (5) Diagnosis In (Di)

Connections

Wiring Diagram: Series Connection

Cat. 4 / PL=e (EN/ISO 13849-1) / SIL3 (IEC 61508) / SILCL3 IEC 62061), if combined with an appropriate Preventa XPS Safety module
PL=e / SIL3


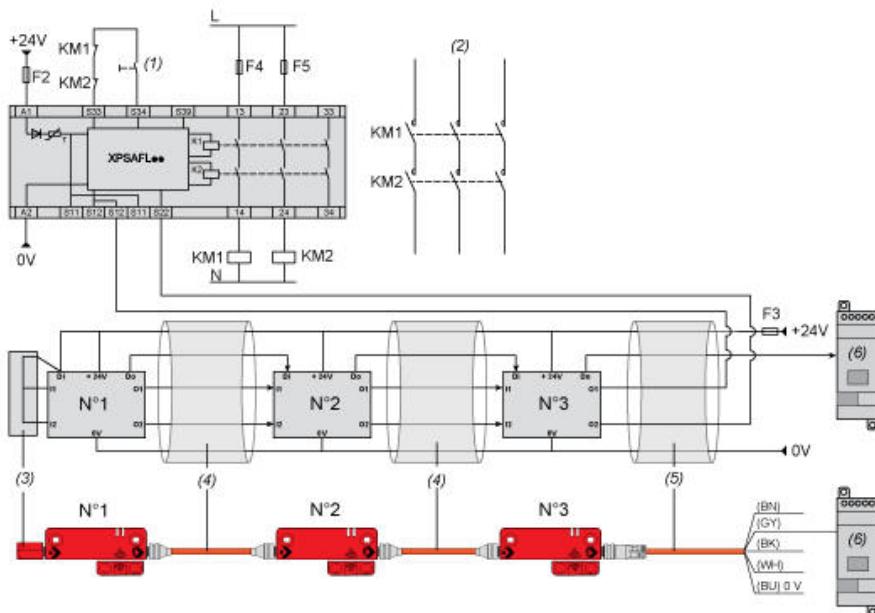


- (1) Start
- (2) Power circuit
- (3) Loopback device
- (4) M12/M12 female jumpers
- (5) Pre-wired female connectors
- (6) Diagnostic module (option)

NOTE: KM1 and KM2 contactors must have force-guided contacts.

Mounting and Clearance

Face to Face Mounting (Preferred Configuration)

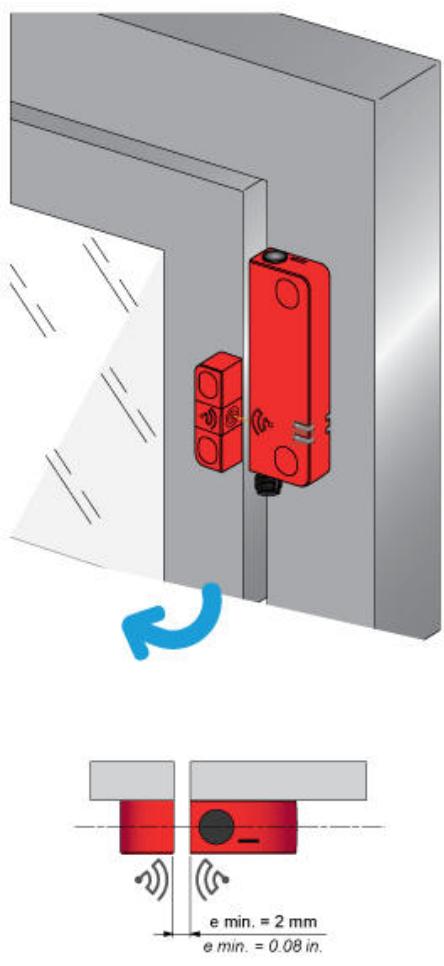
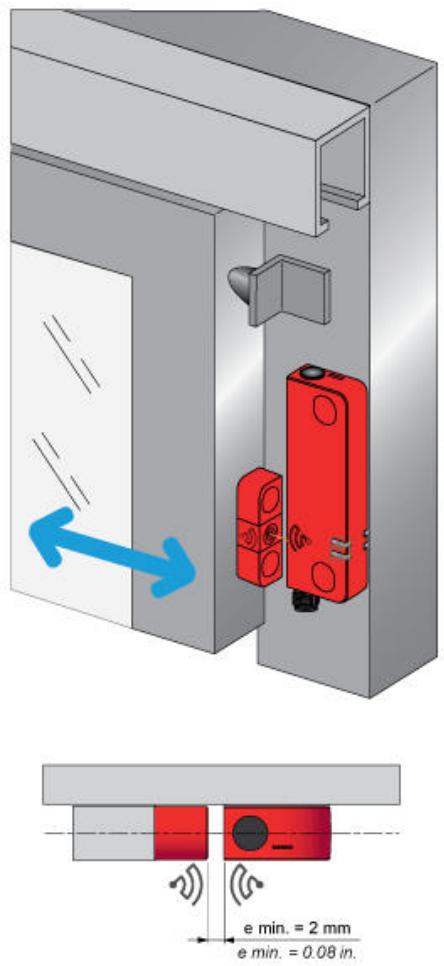
Example n°1	Example n°2
 <p>Diagram illustrating Face to Face Mounting Example 1. A red transponder is mounted on a vertical metal plate. A blue arrow indicates the rotation of the transponder. Below is a cross-sectional view showing the transponder and reader separated by a distance 'e'.</p> <p>e min. = 2 mm e min. = 0.08 in.</p>	 <p>Diagram illustrating Face to Face Mounting Example 2. Two red transponders are mounted on a vertical metal plate. A blue double-headed arrow indicates the distance between the transponders. Below is a cross-sectional view showing the transponders separated by a distance 'e'.</p> <p>e min. = 2 mm e min. = 0.08 in.</p>

e: Recommended minimum mounting distance between transponder and reader.

e: Recommended minimum mounting distance between transponder and reader.

Face to Face Mounting (Preferred Configuration)

Example n°3

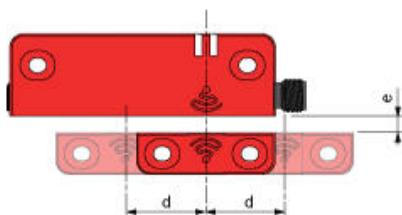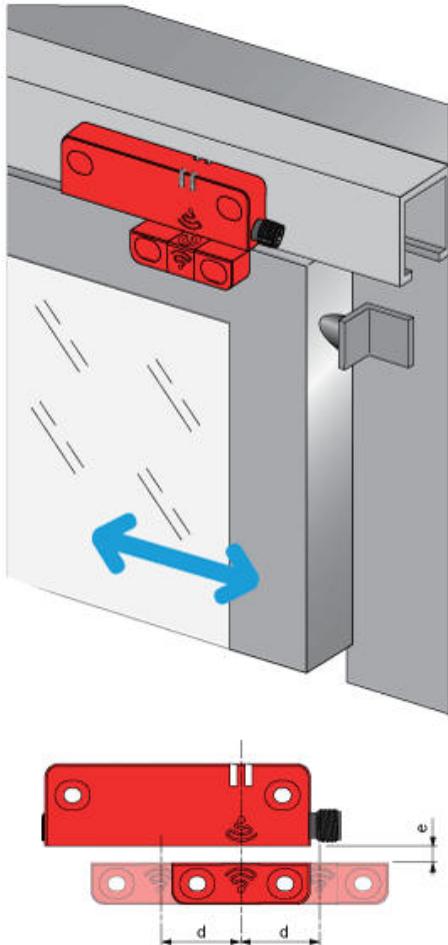



e > 2 mm. (e: recommended minimum mounting distance between transponder and reader)
min.

d : Detection limit

Mounting and Clearance

Side by Side Mounting

Correct Mounting Configuration

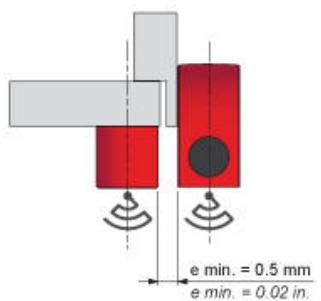
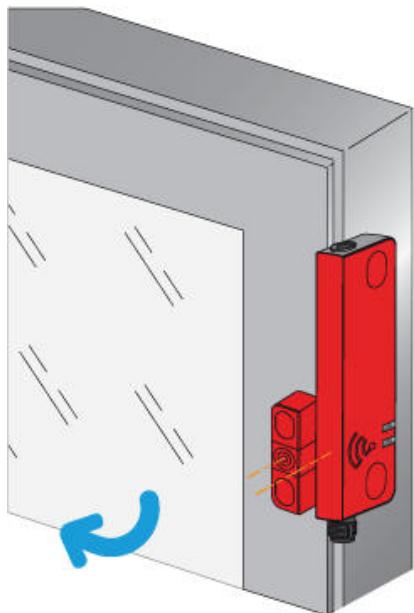


e min. = 0.5 mm
e min. = 0.02 in.

e: Recommended minimum mounting distance between transponder and reader.

Mounting and Clearance

Minimum Mounting Clearances between Safety Switches

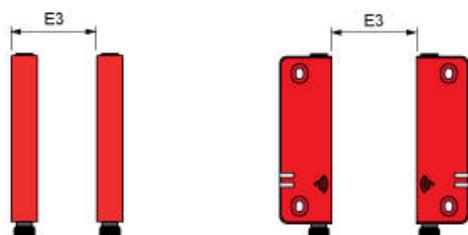

Dimensions in mm

E1 min.	E2 min.	E3 min.
45	150	65


Dimensions in in.

E1 min.	E2 min.	E3 min.
1.77	5.91	2.56

Detection Curves

Face to Face Mounting (Preferred Configuration)

Sao and Sar sensing distances along Y axis as function of Z (longitudinal misalignment for X=0)

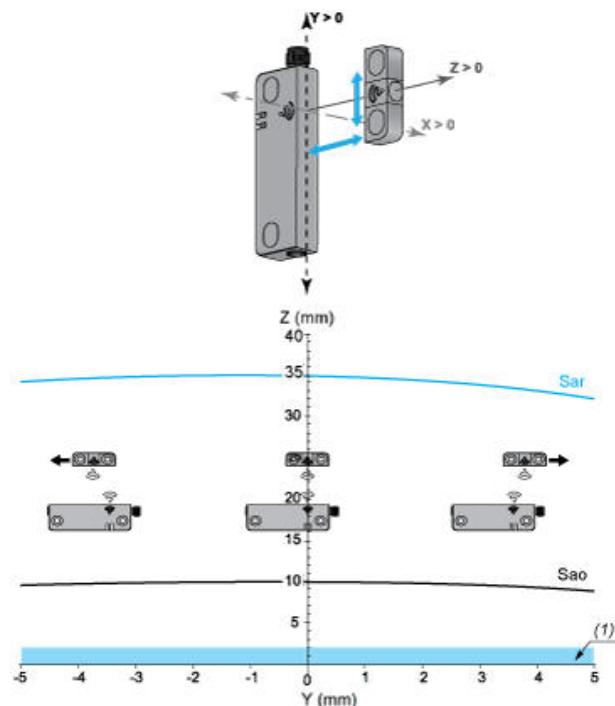


Sar: Assured release distance

Sao: Assured operating distance

(1) Recommended minimum mounting distance between transponder and reader.

Sao and Sar sensing distances along X axis as function of Z (transverse misalignment for Y=0)

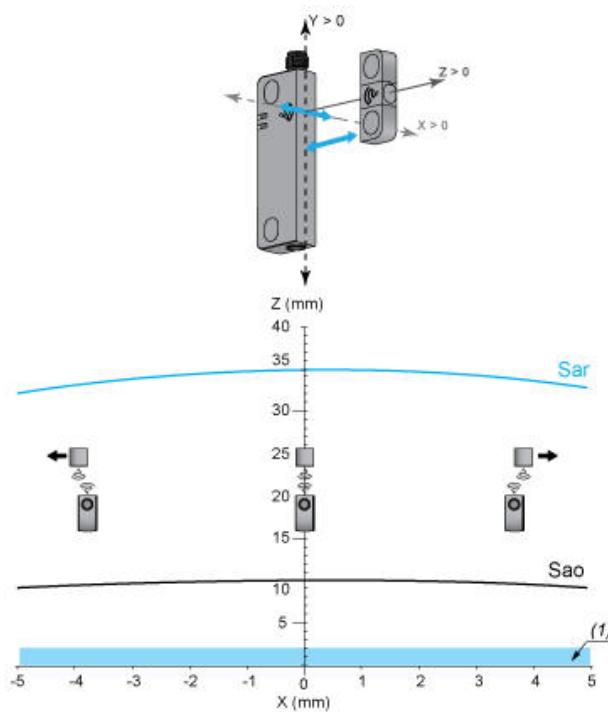

Sar: Assured release distance


Sao: Assured operating distance

(1) Recommended minimum mounting distance between transponder and reader.

Detection Curves

Side by Side Mounting

Sao and Sar sensing distances along Y axis as function of X (longitudinal misalignment for $Z=0$ mm)

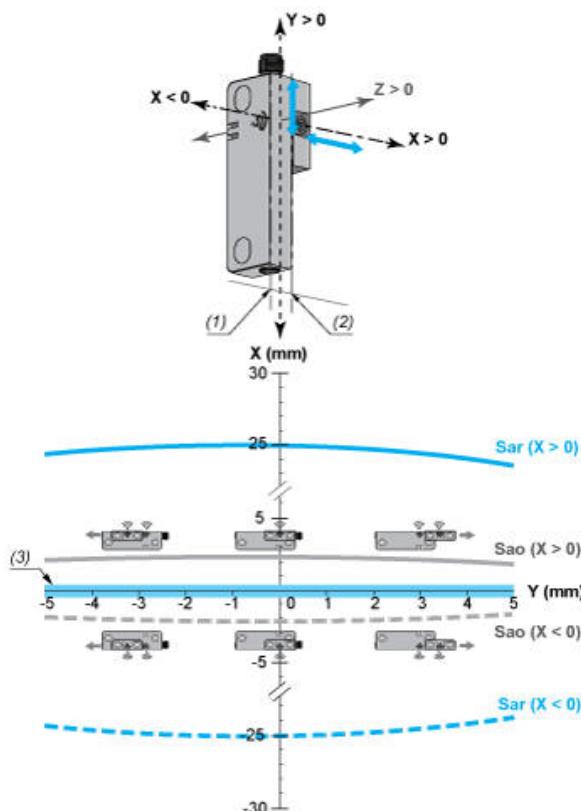

Sar: Assured release distance


Sao: Assured operating distance

(1) $X=0$ for $X<0$

(2) $X=0$ for $X>0$

(3) Recommended minimum mounting distance between transponder and reader.

Sao and Sar sensing distances along Z axis as function of X (transverse misalignment for $Y=0$ mm)

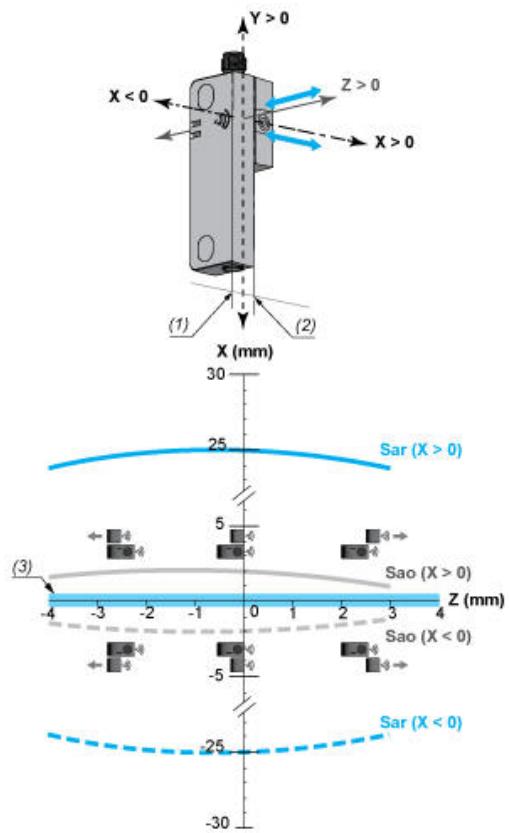

Sar: Assured release distance

Sao: Assured operating distance

(1) $X=0$ for $X<0$

(2) $X=0$ for $X>0$

(3) Recommended minimum mounting distance between transponder and reader.