


Bulk Cables
BCC 0000-0000-00-003-VX44T2-10X
Order Code: BCC0AE8

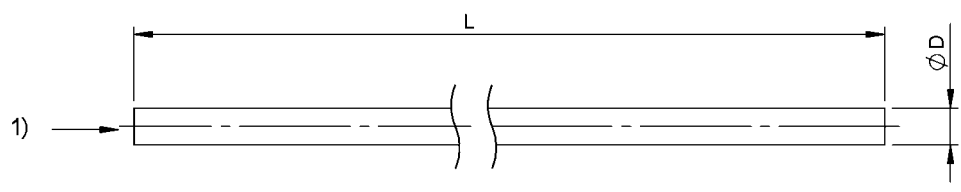

1) from cable drum

Electrical connection

Bending radius min., fixed cable	5 x D
Bending radius min., flexible cable	10 x D
Cable	PVC Yellow, 100 m, drag chain compatible
Cable diameter D	5.00 mm ±0.15 mm
Cable, bending cycles min.	2 mil.
Conductor cross-section	22 AWG
Number of conductors	4

Electrical data

Operating voltage Ub	300 VDC / 300 VAC
----------------------	-------------------

Environmental conditions

Cable temperature, drag chain	-5...60 °C
Cable temperature, fixed routing	-40...105 °C
Cable temperature, flexible routing	-5...105 °C

Material

Cable jacket, material	PVC
------------------------	-----


Mechanical data

Acceleration max., drag chain	5 m/s ²
Cable jacket, color	Yellow
Cable length L	100.00 m
Cable properties	drag chain compatible
Horizontal travel permitted, drag chain	5 m at 5 m/s ²
Traverse speed max., drag chain	200 m/min
Vertical travel permitted, drag chain	2 m at 5 m/s ²

Remarks

Flame-retarding acc. to IEC 60332-2
Bulk cable approval per UL-AWM Style 2661 & CSA AWM I/II A/B
Cable construction acc. to UL-AWM Style 10493

Connector Drawings



Conductor diagram
Conductor 1: brown
Conductor 2: white
Conductor 3: blue
Conductor 4: black

Wiring Diagrams

