



Bulk Cables
BCC 0000-0000-00-030-VS85N6-10X
Order Code: BCC0AEP

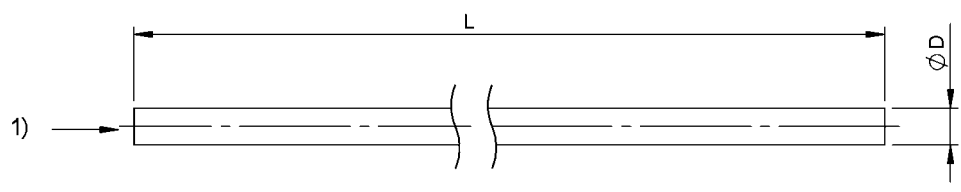

1) from cable drum

Basic features		Material	
Application	DeviceNet Thin	Cable jacket material, note	Shielded
Electrical connection		Cable jacket, material	PVC
		Cable shield	Aluminum foil and copper braid
Cable	PVC Shielded gray, 100 m	Mechanical data	
Cable diameter D	7.20 mm ±0.13 mm	Cable jacket, color	gray
Conductor cross-section	22 AWG	Cable length L	100.00 m
Number of conductors	4		
Electrical data			
Cable rated voltage AC max.	300 V		
Cable rated voltage DC max.	300 V		
Conductor construction	2x2 twisted-pair		
Surge impedance	120 Ohm ±12 Ohm		
Remarks			
Cable construction acc. to CMG 75°C or CL2			
Flame resistant per UL 1685 (CSA FT4)			

Connector Drawings



PIN 1: n.c.

PIN 2: red/ V+

PIN 3: black/V-

PIN 4: white/CAN_H

PIN 5: blueCAN_L