


Bulk Cables
BCC 0000-0000-00-030-PS85N6-10X
Order Code: BCC0AER

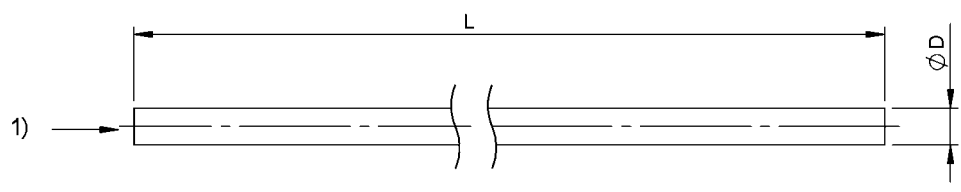


1) from cable drum

Basic features		Electrical data	
Application	DeviceNet Thin	Cable rated voltage AC max.	300 V
Electrical connection		Cable rated voltage DC max.	300 V
		Conductor construction	2x2 twisted-pair
		Surge impedance	120 Ohm ±12 Ohm
		Material	
Bending radius min., flexible cable	10 x D	Cable jacket material, note	Shielded
Cable	PUR Shielded gray, 100 m, drag chain compatible	Cable jacket, material	PUR
Cable diameter D	7.60 mm ±0.25 mm	Cable shield	Aluminum foil and copper braid
Cable, bending cycles min.	1 mil.	Mechanical data	
Conductor cross-section	22 AWG/24 AWG		
Number of conductors	4		
		Cable jacket, color	gray
		Cable length L	100.00 m
		Cable properties	drag chain compatible

Remarks
Bulk cable approval per UL-AWM 20626 or CSA AWM I/II A/B 80°C 300V FT1

Connector Drawings



PIN 1: n.c.

PIN 2: red/ V+

PIN 3: black/V-

PIN 4: white/CAN_H

PIN 5: blueCAN_L