



Mechanical Cam Switches
BNS 819-D10-D16-100-10
Order Code: BNS00N4

BALLUFF

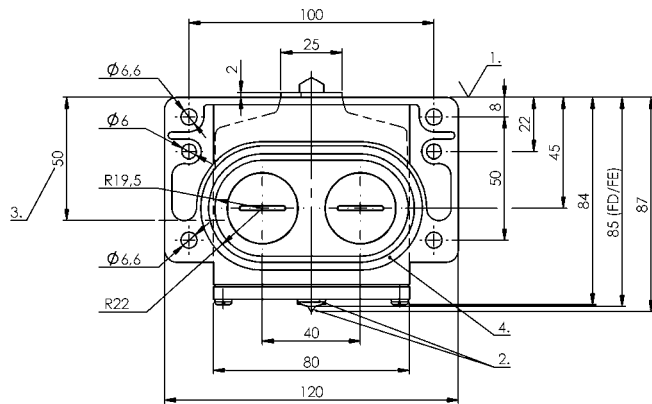

1) Reference edge, 2) Function indicator FD/FE/LL, 3) Cable passage, 4) Sealing ring, 5) Anti-crystallization plunger

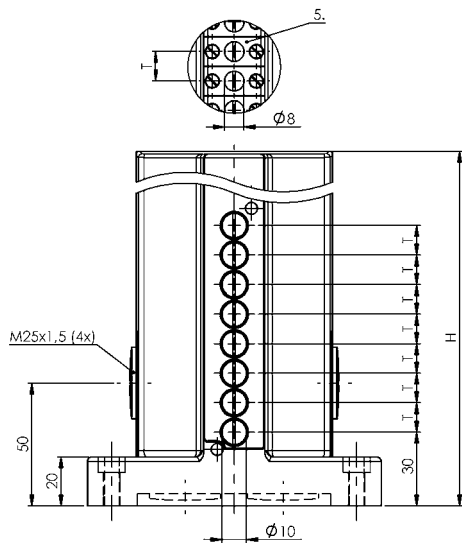

Basic features

DIN switch	DIN 43697
Operating principle	1-10. Switch position: Mechanical

Display/Operation

Function indicator	1-10. Switch position: None
--------------------	-----------------------------

Electrical connection

Connection type	1-10. Switch position: Screw terminal
-----------------	---------------------------------------

Electrical data

Continuous current	1-10. Switch position: 6 A
Rated operating voltage U _e	1-10. Switch position: 250 V AC
Switching rate	1-10. Switch position: 300/min

Environmental conditions

Ambient temperature	-5...85 °C
IP rating	IP67

Material

Housing material	Aluminium, Anodized
Housing material, surface protection	Anodized
Material contacts	1-10. Switch position: Silver, gold plated
Plunger material	1-10. Switch position: 1.4034 stainless steel

Mechanical data

Approach direction	longitudinal, parallel to attachment surface
Approach speed	1-10. Switch position: 40 m/min
Dimension	120 x 200 x 84 mm
Distance cam - reference edge	1-10. Switch position: 4.50...5.00 mm
Flange, feed-through	2 threaded exit M25
Installation	Vertical
Life expectancy mechanical	1-10. Switch position: 30 mil. switching operations
Number of switching positions	10x Chisel Mechanical
Plunger spacing 1st switch position	30 mm
Plunger style	1-10th switch position: Chisel 1-10th switch position: Chisel
Switch actuation force	1-10. Switch position: 20 N
Switching element	1-10. Switch position: BSE 30.0

Range/Distance

Reproducibility	1-10. Switch position: ±0.002 mm
Switch position spacing	16 mm

Wiring Diagrams

BSE 30.0

