


Ultrasonic Sensors
BUS W18M1-GPXI-12/100-S92G
Order Code: BUS004N



1) Exit direction 90° connector, 2) Output function, 3) Ultrasonic transducer axis, 4) Operating voltage

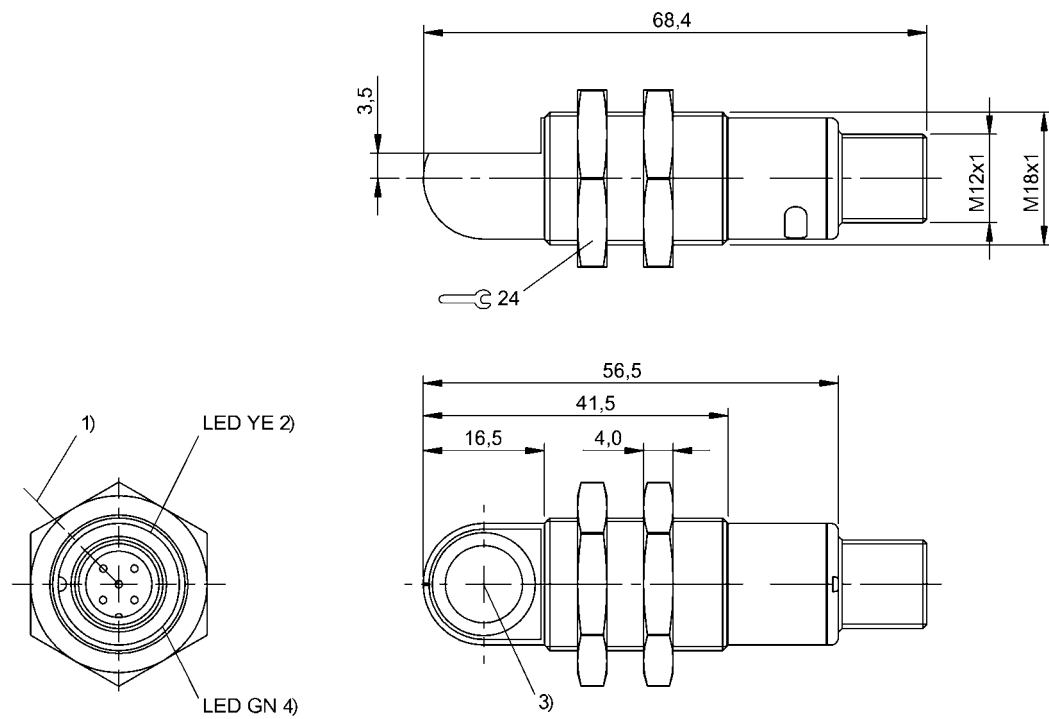

Basic features		Electrical connection	
Application	Distance measurement Object detection	Connection	M12x1-Male, 5-pin
Approval/Conformity	cULus CE WEEE UKCA	Polarity reversal protected	yes
Operating mode	IO-Link Reflectionlight scanner (switching point) Refl.light scanner (window) Retro-reflector	Short-circuit protection	yes
Series	W18M1		
Display/Operation			
Adjuster	no		
Display	Output function- LED yellow LED green: Power		

Ultrasonic Sensors
BUS W18M1-GPXI-12/100-S92G
Order Code: BUS004N

BALLUFF

Electrical data

Current draw max.	40 mA
Hysteresis H max.	20 mm
Input function	Select operating mode Factory setting (Reset) Synchronization on/off NO/NC SIO mode/IO-Link mode Teach switching distance, 2 values Synchronization signal
Operating voltage Ub	10...30 VDC
Output current max.	100 mA
Rated operating voltage Ue DC	24 V
Switching frequency	10 Hz
Synchronization	internal, max. 10 sensors
Ultrasonic Frequency	200 kHz

Environmental conditions

Ambient temperature	-25...70 °C
IP rating	IP67
Storage temperature	-40...85 °C

Functional safety

MTTF (40 °C)	1134 a
--------------	--------

Interface

Interface	IO-Link 1.0
Interface setting option	Switch. point (2x for window) SIO mode/IO-Link mode Measured value filter Hysteresis Filter strength (10 levels) Operating mode Foreground suppression range Normally open/Normally closed Factory setting (Reset)
Process data OUT	Distance value Switching state
Process data cycle min.	20 ms
Switching output	PNP/NPN NO/NC push-pull

Material

Housing material	Brass, nickel-plated PBT
Material sensing surface	PU foam/Epoxy resin/Glass
Surface protection	nickel-plated


Mechanical data

Dimension	Ø 18 x 68.4 mm
Mounting part	Nut M18x1

Range/Distance

Measuring range	120...1300 mm
Rated operating distance Sn	1000 mm
Repeat accuracy	± 0.15 %FS
Resolution	≤ 0.069 mm


Connector Drawings



Ultrasonic Sensors
BUS W18M1-GPXI-12/100-S92G
Order Code: BUS004N

BALLUFF

Wiring Diagrams

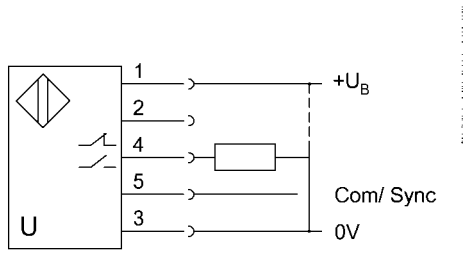

Technical Drawings

