


Receptacles
BCC M354-0000-20-RM050-005
Order Code: BCC0E2Z

BALLUFF

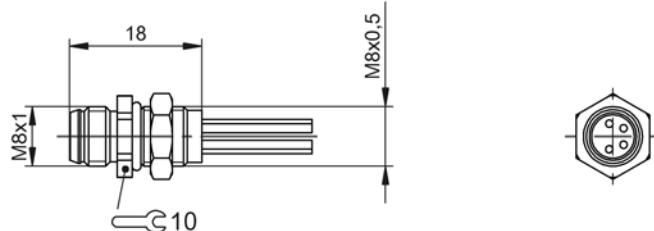

Basic features

Approval/Conformity WEEE

Electrical connection

Conductor cross-section	0.25 mm ²
Connection	M8x1-Male, straight, 4-pin, A-coded
Number of conductors	4

Electrical data

Operating voltage Ub	30 VDC / 30 VAC
Rated current (40 °C)	4.0 A

Environmental conditions

Ambient temperature	-25...85 °C
IP rating	IP67

Material

Conductor insulation material	TPE
Housing material	PA
	Brass
Material contact carrier	PA
Material contacts	Brass


Mechanical data

Lead length L	0.50 m
Mounting part	M8x0.5

Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.
Nut included in scope of delivery

Connector Drawings



PIN 1: brown

PIN 2: white

PIN 3: blue

PIN 4: black

Wiring Diagrams

1 _____
2 _____
3 _____
4 _____