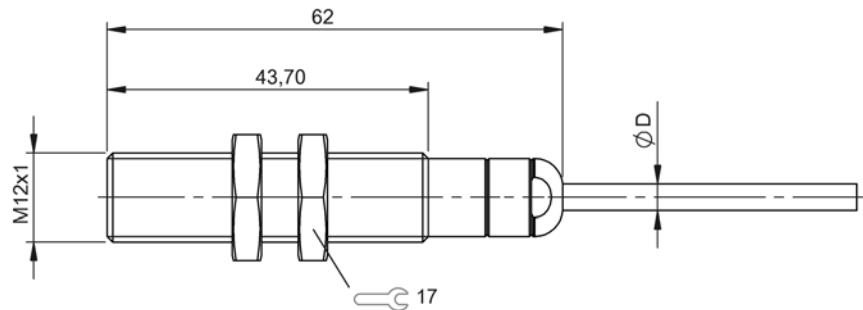


Inductive Sensors

BES 515-325-SA74-D-TF-02

Order Code: BES04CK

BALLUFF

Basic features

Approval/Conformity	CE WEEE
---------------------	------------

Electrical connection

Cable diameter D	3.70 mm
Cable length L	2 m
Conductor cross-section	0.34 mm ²
Connection type	Cable, 2.00 m, PTFE
Number of conductors	3
Polarity reversal protected	yes
Short-circuit protection	yes

Electrical data

No-load current <i>Io</i> max., damped	7 mA
No-load current <i>Io</i> max., undamped	7 mA
Operating voltage <i>Ub</i>	10...30 VDC
Rated insulation voltage <i>Ui</i>	75 V DC
Rated operating current <i>le</i>	200 mA
Rated operating voltage <i>Ue</i> DC	24 V
Ready delay <i>tv</i> max.	300 ms
Residual current <i>Ir</i> max.	20 µA
Ripple max. (% of <i>Ue</i>)	10 %
Switching frequency	200 Hz
Voltage drop static max.	2.5 V

Environmental conditions

Ambient temperature	-25...160 °C
IP rating	IP68

Functional safety

MTTF (40 °C)	2730 a
--------------	--------

Interface

Switching output	PNP normally open (NO)
------------------	------------------------

Material

Housing material	Stainless steel
Material jacket	PTFE, FEP
Material sensing surface	PEEK

Mechanical data

Dimension	Ø 12 x 62 mm
Installation	for flush mounting
Mounting length	43.70 mm
Size	M12x1

Range/Distance

Assured operating distance <i>Sa</i>	1.6 mm
Hysteresis <i>H</i> max. (% of <i>Sr</i>)	10.0 %
Rated operating distance <i>Sn</i>	2 mm
Real switching distance <i>sr</i>	2 mm
Repeat accuracy max. (% of <i>Sr</i>)	5.0 %
Temperature drift max. (% of <i>Sr</i>)	20 %
Tolerance <i>Sr</i>	±10 %

Remarks


Installation instructions for ultra-high temperature rated inductive sensors 887015

The sensor is functional again after the overload has been eliminated.

For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams



Technical Drawings

Derating

