


Single-Ended Cordsets
BKS-S 80-G-PU-10
Order Code: BCC0E9K

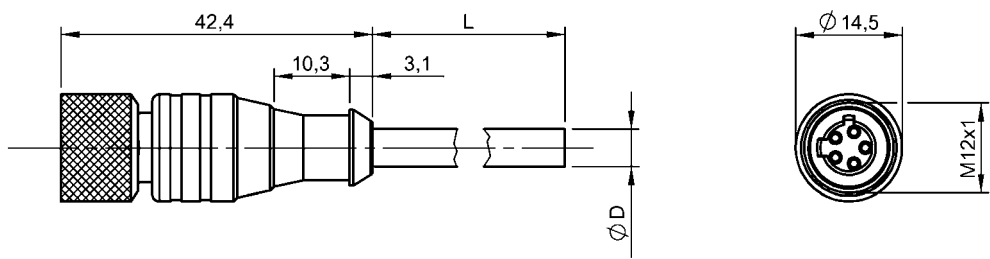

Basic features

Approval/Conformity	CE cURus WEEE
---------------------	---------------------

Electrical connection

Cable	PUR black, 10 m
Cable diameter D	5.70 mm $\pm$ 0.20 mm
Conductor cross-section	0.50 mm ²
Connection	M12x1-Female, straight, 5-pin, C-coded
Connector configuration	Straight
Number of conductors	5
Number of pins	5
System	Molded

Electrical data

Operating voltage U _b	240 VDC / 240 VAC
----------------------------------	-------------------

Environmental conditions

Ambient temperature	-25...80 °C
Cable temperature, fixed routing	-25...70 °C
Cable temperature, flexible routing	-5...70 °C
IP rating	IP68

Material

Cable jacket, material	PUR
Material contact carrier	TPU
Material contacts	Bronze
Material cover nut	Brass nickel-plated
Material grip	PUR


Mechanical data

Cable jacket, color	black
Cable length L	10.00 m
Tightening torque pigtail	0.6 Nm

Remarks

Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings



- PIN 1: blue
- PIN 2: black
- PIN 3: green/yellow
- PIN 4: brown
- PIN 5: white

Wiring Diagrams

