


Junction blocks

BPI AM3030-5K-B0-SM4CT
Order Code: BPI00HK

BALLUFF

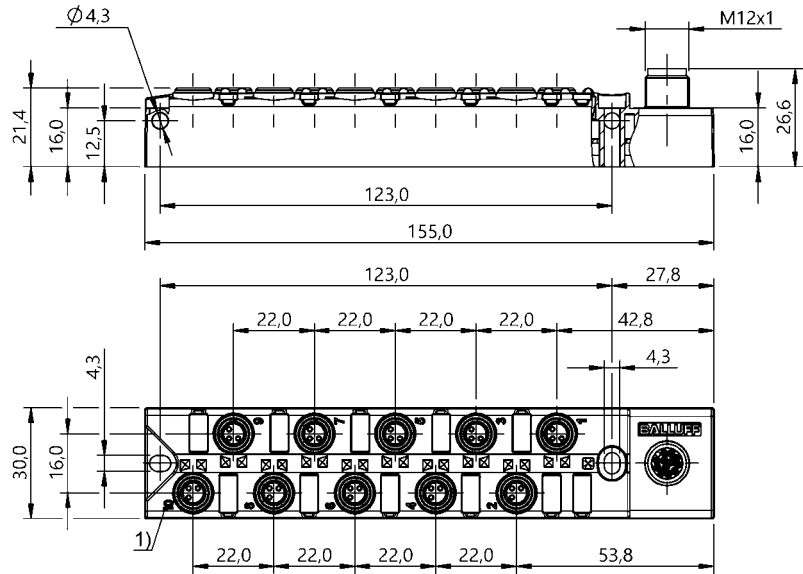

1) Slot numbering



Basic features

Approval/Conformity	CE UKCA cULus WEEE
Scope of delivery	Part labels (11x) Cover cap (5x)

Electrical connection

Connection slots	10x M8x1-Female, 3-pin
------------------	------------------------

Electrical data

Isolation resistance	$\geq 10 \text{ G}\Omega\text{m}$
Operating voltage U_b	10...30 VDC/10...30 VAC
Output current max.	1.5 A
Rated operating voltage U_e DC	24 V
Total current max.	1.5 A

Environmental conditions

Ambient temperature	-25...80 °C
IP rating	IP67, when threaded in



Material

Housing material	PBT, GF
Material contact carrier	PBT
Material contacts	Bronze (CuSn6), nickel layer

Mechanical data

Casting	yes
Dimension	155 x 30 x 26.6 mm
Mounting part	M4 (2x)
Tightening torque	1.2 Nm $\pm$ 0.2 (M4)
Tightening torque pigtail	0.4 Nm + 0.1 Nm (M8 connector)

Connector Drawings



I/O ports
 PIN 1: +24V
 PIN 3: 0V
 PIN 4: signal

Wiring Diagrams

