


Junction blocks

BPI 8M4A50-2K-B0-SM6LT

Order Code: BPI00JY

BALLUFF

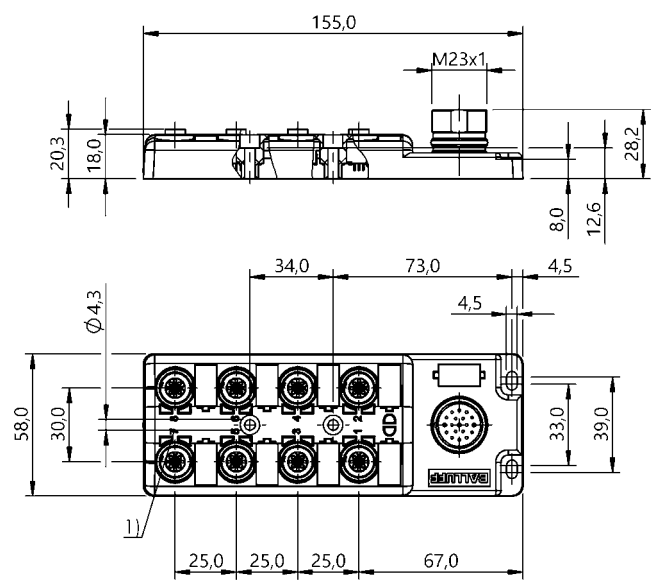

1) Slot numbering



Basic features

Approval/Conformity	CE UKCA cULus WEEE
Scope of delivery	Part labels (24x) Cover cap (4x)

Electrical connection

Connection slots	8x M12x1-Female, 5-pin
------------------	------------------------

Electrical data

Isolation resistance	$\geq 10 \text{ G}\Omega\text{m}$
Operating voltage U_b	10...60 VDC/10...60 VAC
Output current max.	4 A
Rated operating voltage U_e DC	24 V
Total current max.	8 A

Environmental conditions

Ambient temperature	-25...80 °C
IP rating	IP67, when threaded in



Material

Housing material	PBT, GF
Material contact carrier	PBT
Material contacts	Bronze (CuSn6), nickel layer

Mechanical data

Casting	yes
Dimension	155 x 58 x 28.5 mm
Mounting part	M4 (4x)
Tightening torque	1.2 Nm $\pm$ 0.2 (M4)
Tightening torque pigtail	0.6 Nm + 0.1 Nm (M12 connector)

Connector Drawings

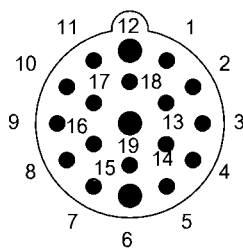

PIN 1: +24V
PIN 2: Signal 2
PIN 3: 0V
PIN 4: Signal 1
PIN 5: PE

Wiring Diagrams

