


Bulk Cables
BCC 0000-0000-00-003-SW0434-10X
Order Code: BCC0HA8

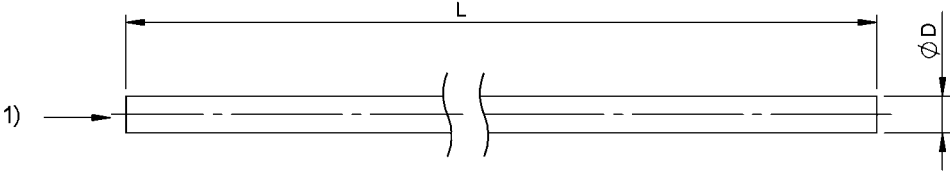

1) from cable drum

Basic features

Application	Welding area
Electrical connection	
Bending radius min., fixed cable	10 x D
Bending radius min., flexible cable	15 x D
Cable	Silicone welding spark resistant black, 100 m
Cable diameter D	5.70 mm ±0.25 mm
Conductor cross-section	0.34 mm²
Number of conductors	4

Environmental conditions

Cable temperature UL max., fixed routing	150 °C
Cable temperature UL max., flexible routing	150 °C
Cable temperature, fixed routing	-40...200 °C
Cable temperature, flexible routing	-25...200 °C

Material

Cable jacket material, note	welding spark resistant
Cable jacket, material	Silicone


Mechanical data

Cable jacket, color	black
Cable length L	100.00 m

Remarks

Cable construction acc. to UL-AWM Style 4535
Halogen-free per IEC 60754
Maximum temperature at outer jacket from weld spatter/beads short-time 800°C.

Connector Drawings



Conductor diagram

Conductor 1: brown

Conductor 2: white

Conductor 3: blue

Conductor 4: black