


Double-Ended Cordsets  
BCC M415-M423-3A-603-EX43T2-010  
Order Code: BCC05NN

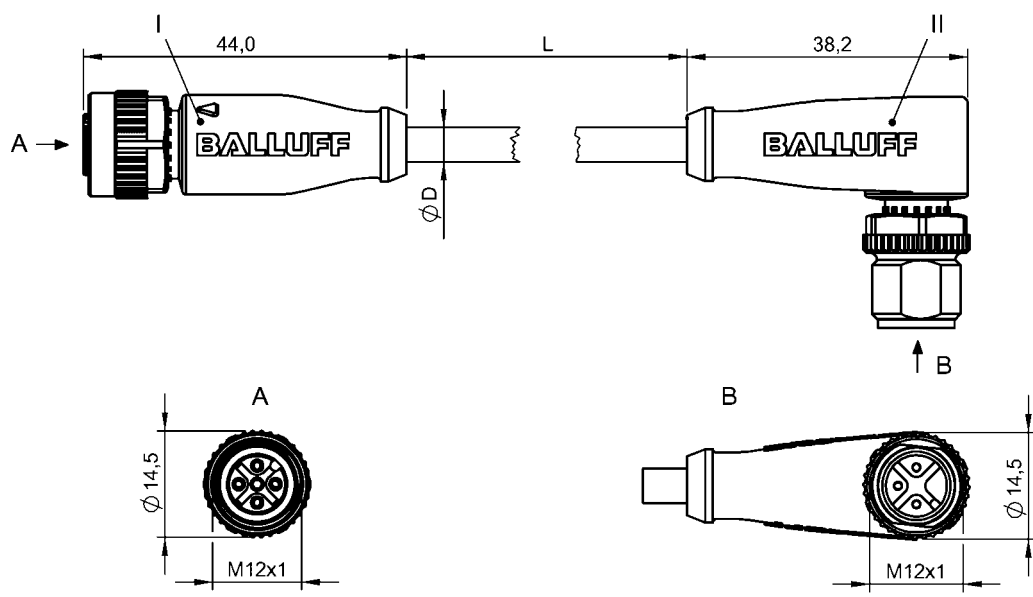

Basic features

|                     |                     |
|---------------------|---------------------|
| Approval/Conformity | CE<br>cULus<br>WEEE |
|---------------------|---------------------|

Display/Operation

|                            |              |
|----------------------------|--------------|
| Function indicator (Pin 4) | LED yellow   |
| Power indicator            | LED green/no |

Electrical connection

|                                     |                                        |
|-------------------------------------|----------------------------------------|
| Bending radius min., fixed cable    | 5 x D                                  |
| Bending radius min., flexible cable | 10 x D                                 |
| Cable                               | TPE Yellow, 1 m, drag chain compatible |
| Cable diameter D                    | 5.30 mm ±0.13 mm                       |
| Cable, bending cycles min.          | 10 mil.                                |
| Conductor cross-section             | 22 AWG                                 |
| Connection 1                        | M12x1-Female, straight, 5-pin, A-coded |
| Connection 2                        | M12x1-Male, angled, 3-pin, A-coded     |
| Number of conductors                | 3                                      |
| System                              | Molded/Molded                          |

Electrical data

|                             |        |
|-----------------------------|--------|
| Cable rated voltage AC max. | 300 V  |
| Cable rated voltage DC max. | 300 V  |
| Operating voltage Ub        | 30 VDC |
| Rated current (40 °C)       | 4.0 A  |

Environmental conditions

|                                     |                                     |
|-------------------------------------|-------------------------------------|
| Cable temperature, fixed routing    | -50...105 °C                        |
| Cable temperature, flexible routing | -25...105 °C                        |
| IP rating                           | IP67, IP68, IP69K/IP67, IP68, IP69K |

Interface

|                  |                        |
|------------------|------------------------|
| Switching output | NPN normally open (NO) |
|------------------|------------------------|

Material

|                          |                             |
|--------------------------|-----------------------------|
| Cable jacket, material   | TPE                         |
| Material contact carrier | PUR/PUR                     |
| Material contacts        | Bronze/Brass                |
| Material cover nut       | Die-cast zinc/Die-cast zinc |
| Material grip            | PUR/PUR                     |


Mechanical data

|                           |                       |
|---------------------------|-----------------------|
| Cable jacket, color       | Yellow                |
| Cable length L            | 1.00 m                |
| Cable properties          | drag chain compatible |
| Tightening torque pigtail | 0.6 Nm/0.6 Nm         |

Remarks


Cable construction acc. to UL-AWM Style 20327  
Flame resistance acc. to IEC 332-2  
Enclosure rating per IEC 60529 or 20653, only in screwed state with the associated mating piece.

Connector Drawings

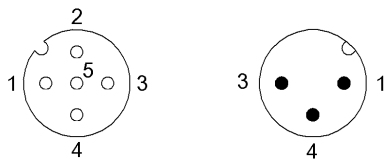

- |                 |              |
|-----------------|--------------|
| I               | II           |
| PIN 1: brown    | PIN 1: brown |
| PIN 2: not used | PIN 3: blue  |
| PIN 3: blue     | PIN 4: black |
| PIN 4: black    |              |
| PIN 5: not used |              |

Wiring Diagrams

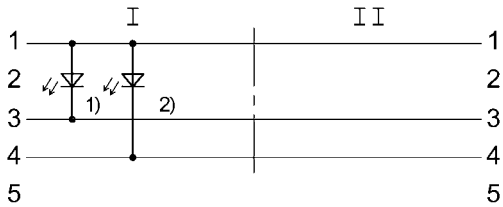

- 1) Green LED = Power  
2) Yellow LED = Function